
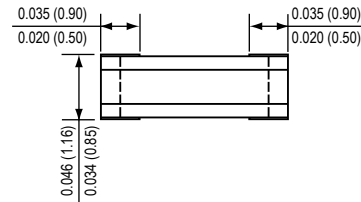


A suffix of "-C" specifies halogen & lead-free

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier , majority carrier conduction
- Low power loss , High efficiency
- High current capability
- High surge capacity
- RoHS Compliant Product

1206 (SOD-123)

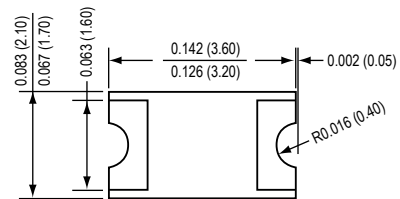

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case : Packed with FRP substrate and epoxy underfilled

Terminals : Solder plated , solderable per MIL-STD-750, Method 2026

Polarity : Laser marking

Weight : 0.02 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOLS	SCD5393S	SCD5395S	SCD5397S	SCD5398S	SCD5399S	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	400	600	800	1000	V
Working Peak Reverse Voltage	V_{RMS}	200	400	600	800	1000	V
Maximum DC Blocking Voltage	V_{DC}	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	$I_{(AV)}$	1					A
Peak Forward Surge Current, T=500uS Repetitive for 4 around superimposed on rated load (JEDEC method)	I_{FSM}	120					A
Maximum Instantaneous Forward Voltage at 1.0A	V_F	1					V
Maximum DC Reverse Current (Note1) Ta=25°C	I_R	1					uA
at Rated DC Blocking Voltage Ta=100°C		30					
Maximum reverse recovery time	T_{rr}	3000					nS
Typical Junction Capacitance (Note1)	C_j	12					pF
Operating Temperature Range	T_J	-50 ~ +125					°C
Storage Temperature Range	T_{STG}	-65 ~ +150					°C

NOTES:

1. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.

2. Marking:

- SCD5393S : 17ZD
- SCD5395S : 17ZG
- SCD5397S : 17ZJ
- SCD5398S : 17ZK
- SCD5399S : 17ZM

FIG.1 - FORWARD CURRENT DERATING CURVE

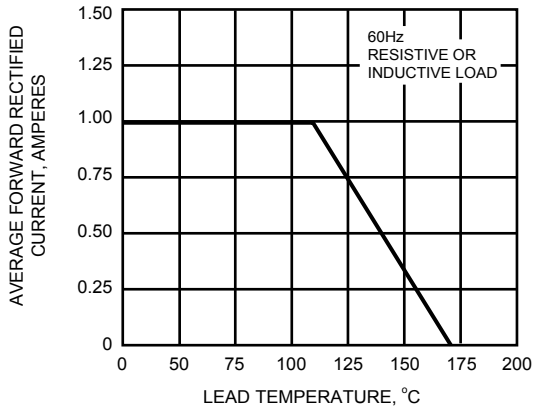


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

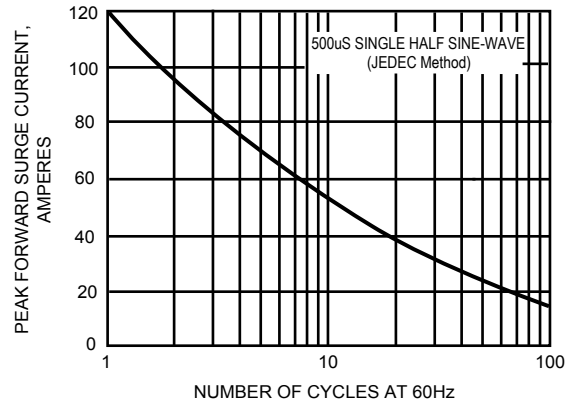


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

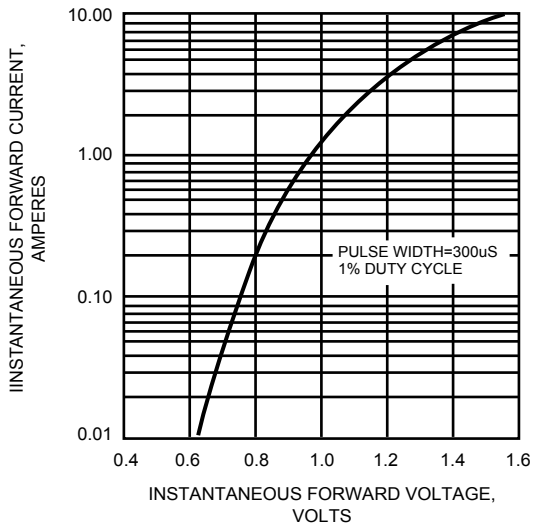


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

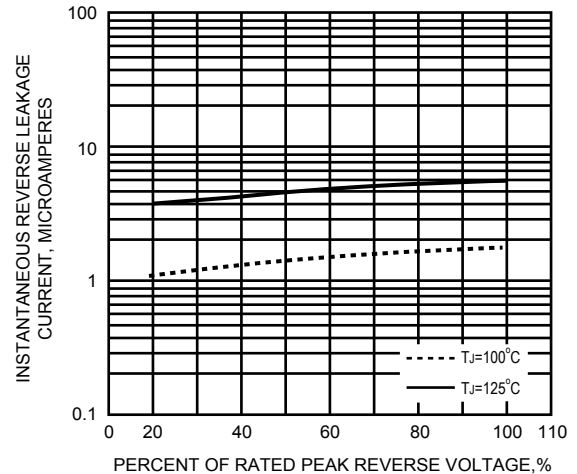


FIG.5 - TYPICAL JUNCTION CAPACITANCE

