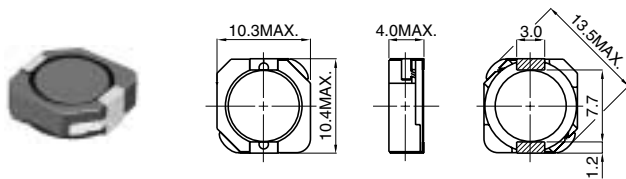



CDRH104R

Dimensions (mm)

LAND PATTERNS(mm)

CONSTRUCTION

 (1.5 μ H – 330 μ H)

◆ TYPE CDRH104R

Parts No.	Inductance	D.C.R. (Ω) (Max) Typical / Rated D. C. Current (A)	Parts No.	Inductance	D.C.R. (Ω) (Max) Typical / Rated D. C. Current (A)
0R8	0.8 μ H		120	12 μ H	
1R2	1.2 μ H		150	15 μ H	50m (37m) / 3.60
1R3	1.3 μ H		180	18 μ H	
1R5	1.5 μ H	8.1m (6.0m) / 10.00	220	22 μ H	73m (54m) / 2.90
2R1	2.1 μ H		270	27 μ H	
2R2	2.2 μ H		330	33 μ H	93m (69m) / 2.30
2R4	2.4 μ H		390	39 μ H	
2R5	2.5 μ H	10m (7.8m) / 7.50	470	47 μ H	128m (95m) / 2.10
3R1	3.1 μ H		560	56 μ H	
3R3	3.3 μ H		680	68 μ H	213m (158m) / 1.50
3R5	3.5 μ H		820	82 μ H	
3R8	3.8 μ H	13m (9.6m) / 6.00	101	100 μ H	304m (225m) / 1.35
3R9	3.9 μ H		121	120 μ H	
4R4	4.4 μ H		151	150 μ H	506m (375m) / 1.15
4R7	4.7 μ H		181	180 μ H	
5R2	5.2 μ H	22m (16m) / 5.50	221	220 μ H	756m (560m) / 0.92
5R8	5.8 μ H		271	270 μ H	
6R1	6.1 μ H		331	330 μ H	1.09m (810m) / 0.70
6R8	6.8 μ H		391	390 μ H	
7R0	7.0 μ H	27m (20m) / 4.80	471	470 μ H	
7R5	7.5 μ H		561	560 μ H	
7R6	7.6 μ H		681	680 μ H	
8R2	8.2 μ H		821	820 μ H	
100	10 μ H	35m (26m) / 4.40	102	1,000 μ H	

 Measuring Freq. (L)
 CDRH104R 100kHz

 Tolerance of Inductance
 CDRH104R \pm 30% (N)

Rated D.C. Current

This rated current indicates the current when the inductance decreases to 65% of its initial value or DC current when the temperature of coil is increased by 30°C.

Sales Contact
North America
 1701 Golf Road, Tower 3
 Suite 400, Rolling
 Meadows, IL 60008, USA
 Tel: (1) 847 545-6700
 Fax: (1) 847 545-6720

Japan
 Nihonbashi- ingyocho
 2-Chome, Chuo-ku,
 Tokyo, Japan
 Tel: (81) 03 3667-3301
 Fax: (81) 03 3667-3456

Hong Kong
 14/F, Eastern Centre,
 1065 King's Road, Quarry
 Road, Hong Kong
 Tel: (852) 2880-6688
 Fax: (852) 2880-9596

Taiwan
 No. 171, Futech Street,
 Hsin-I, Taipei, Taiwan,
 ROC
 Tel: (886) 2 2726-2177
 Fax: (886) 2 2728-2726

Singapore
 996 Bendemeer
 Road #04-05 to 06
 Singapore 339944
 Tel: (65) 2963-388
 Fax: (65) 2963-390

Europe
 Chaussee de Tervuren113A,
 1160 Brussels
 Belgium
 Email:
 europe.sales@hk.sumida.com