

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

To all our customers

Regarding the change of names mentioned in the document, such as Mitsubishi Electric and Mitsubishi XX, to Renesas Technology Corp.

The semiconductor operations of Hitachi and Mitsubishi Electric were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.) Accordingly, although Mitsubishi Electric, Mitsubishi Electric Corporation, Mitsubishi Semiconductors, and other Mitsubishi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Note : Mitsubishi Electric will continue the business operations of high frequency & optical devices and power devices.

Renesas Technology Corp.
Customer Support Dept.
April 1, 2003

M5278LXX, M5278LXXM

(5V, 5.6V, 8V, 9V, 10V, 12V, 15V) 3-TERMINAL FIXED POSITIVE OUTPUT VOLTAGE REGULATOR (WITH FOLD-BACK PROTECTION CIRCUIT)



DESCRIPTION

The M5278L series consists of monolithic integrated circuits, each a three-terminal regulator with maximum load capabilities of 100mA and featuring output voltages of 5, 5.6, 8, 9, 10, 12, or 15V. The high-performance, fixed-positive output power supply ICs are packaged in 3-pin packages featuring fold-back protective circuits for limiting current when load short. They are especially appropriate for use in personal computers and general power supplies of electrical appliances.

FEATURES

- Interchangeable with other brand 78L series
..... $I_{Lmax}=100mA$
- Internal fold-back protection circuit limits current due to shorted loads.
M5278L05 16.5mA (typ.) (1/10 that of other brands)
- High ripple division factor
M5278L05 73dB (typ.)
- Low output voltage tolerance $\pm 5\%$ (max.)
- High level of permissible internal heat dissipation
..... 900mW (max.) 3P5
..... 500mW (max.) 3P2

PIN CONFIGURATION



Outline EIAJ: TO-92L

Outline SOT-89

ELECTRODE CONNECTION

ELECTRODE CONNECTION

- ① : OUTPUT
- ② : GND
- ③ : INPUT

- ① : INPUT
- ② : GND
- ③ : OUTPUT

APPLICATION


Power supply for microcomputer in VTR equipment, general power supply for electronic equipment of tape decks, car stereo equipment and radio cassette recorder.

M5278LXX blank 3P5 pkg.
M 3P2 pkg.
OUTPUT VOLTAGE VALUE

Type	Marking		Output voltage
	3P5	3P2	
M5278L05	78L05	MA	5V
M5278L56	78L56	MB	5.6V
M5278L10	78L10	MF	10V
M5278L12	78L12	MG	12V

Type	Marking		Output voltage
	3P5	3P2	
M5278L08	78L08	MD	8V
M5278L09	78L09	ME	9V
M5278L15	78L15	MH	15V

BLOCK DIAGRAM

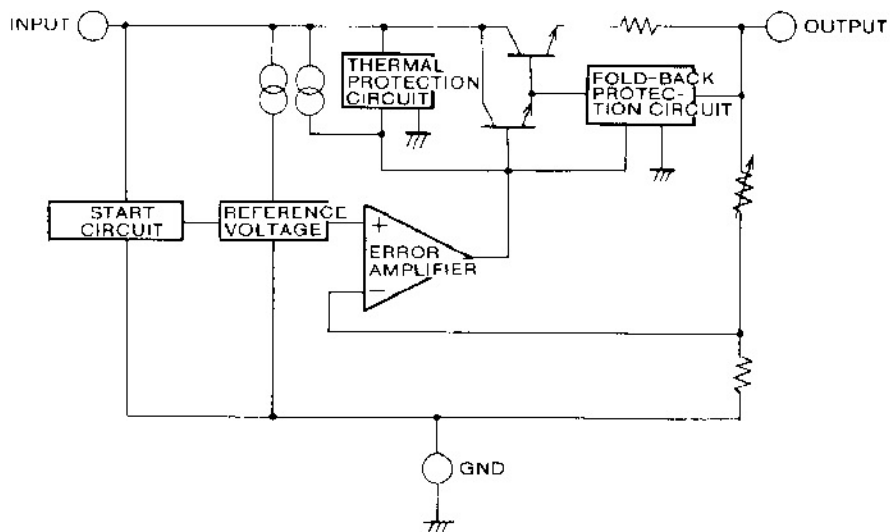


M5278LXX, M5278LXXM

(5V, 5.6V, 8V, 9V, 10V, 12V, 15V) 3-TERMINAL FIXED POSITIVE OUTPUT VOLTAGE REGULATOR (WITH FOLD-BACK PROTECTION CIRCUIT)

ABSOLUTE MAXIMUM RATINGS (T_a=25°C)

Symbol	Parameter	Ratings	Unit
V _i	Input voltage	36	V
I _L	Load current	100	mA
P _d	Power dissipation	900(3P5)/500(3P2)	mW
T _{opr}	Operating temperature	-20~+75	°C
T _{stg}	Storage temperature	-55~+150	°C

STANDARD CONNECTION

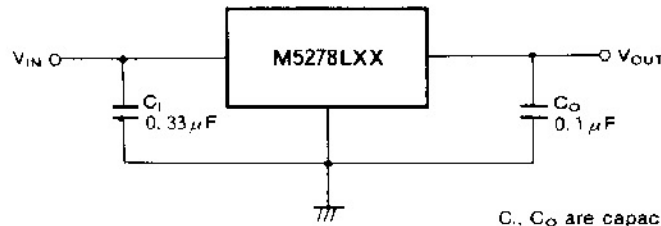

C₁, C₀ are capacitors to prevent oscillation. Make connections as close to the IC as possible.

ELECTRICAL CHARACTERISTICS

M5278L05 (V_i=10V, I_L=40mA, T_a=25°C, C₁=0.33 μF, C₀=0.1 μF, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _O	Output voltage		4.75	5.0	5.25	V
R _{reg-in}	Input regulation	7.5V ≤ V _i ≤ 20V		50	200	mV
		8V ≤ V _i ≤ 20V		30	150	
R _{reg-L}	Load regulation	1mA ≤ I _L ≤ 100mA		10	60	mV
		1mA ≤ I _L ≤ 40mA		5	30	
V _O	Output voltage	7.5V ≤ V _i ≤ 20V, 1mA ≤ I _L ≤ 40mA	4.7	5.0	5.3	V
		V _i =10V, 1mA ≤ I _L ≤ 70mA	4.7	5.0	5.3	
I _B	Bias current	I _L =0		4.8	6.7	mA
ΔI _B	Bias current variability	8V ≤ V _i ≤ 20V, I _L =40mA		0.1	1.5	mA
		V _i =10V, 1mA ≤ I _L ≤ 40mA			0.2	
V _{NO}	Output noise voltage	BW: 10Hz~100kHz		49		μVrms
RR	Ripple rejection ratio	f=120Hz, V _{in} =0dBm	63	73		dB
V _i -V _O	Minimum input-output voltage difference			2.0		V
I _{LP}	Peak load current			130		mA
I _{OS}	Output short holding current			16.5		mA
TC _{V_O}	Temperature coefficient of output voltage	I _L =5mA		-0.6		mV/°C

M5278LXX, M5278LXXM

(5V, 5.6V, 8V, 9V, 10V, 12V, 15V) 3-TERMINAL FIXED POSITIVE OUTPUT VOLTAGE REGULATOR (WITH FOLD-BACK PROTECTION CIRCUIT)

M5278L56 ($V_i=11V, I_L=40mA, T_a=25^{\circ}C, C_1=0.33\mu F, C_O=0.1\mu F$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_O	Output voltage		5.32	5.6	5.88	V
Reg_{in}	Input regulation	$8.5V \leq V_i \leq 21V$		50	200	mV
		$9V \leq V_i \leq 21V$		30	150	
Reg_L	Load regulation	$1mA \leq I_L \leq 100mA$		10	60	mV
		$1mA \leq I_L \leq 40mA$		5	30	
V_O	Output voltage	$8.5V \leq V_i \leq 21V, 1mA \leq I_L \leq 40mA$	5.27	5.6	5.93	V
		$V_i=11V, 1mA \leq I_L \leq 70mA$	5.27	5.6	5.93	
I_B	Bias current	$I_L=0$		4.8	6.7	mA
ΔI_B	Bias current differential	$9V \leq V_i \leq 21V, I_L=40mA$		0.1	1.5	mA
		$V_i=11V, 1mA \leq I_L \leq 40mA$			0.2	
V_{NO}	Output noise voltage	BW: 10Hz~100kHz		55		μV_{rms}
RR	Ripple rejection ratio	$f=120Hz, V_{in}=0dBm$	63	73		dB
V_i-V_O	Minimum input-output voltage difference			2.0		V
I_{LP}	Peak load current			150		mA
I_{OS}	Output short circuit sustain current			16.5		mA
TC_{VO}	Temperature coefficient of output voltage	$I_L=5mA$		-0.65		mV/°C

M5278L08 ($V_i=14V, I_L=40mA, T_a=25^{\circ}C, C_1=0.33\mu F, C_O=0.1\mu F$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_O	Output voltage		7.6	8.0	8.4	V
Reg_{in}	Input regulation	$10.5V \leq V_i \leq 23V$		60	200	mV
		$11V \leq V_i \leq 23V$		40	150	
Reg_L	Load regulation	$1mA \leq I_L \leq 100mA$		10	30	mV
		$1mA \leq I_L \leq 40mA$		5	40	
V_O	Output voltage	$10.5V \leq V_i \leq 23V, 1mA \leq I_L \leq 40mA$	7.52	8.0	8.48	V
		$V_i=14V, 1mA \leq I_L \leq 70mA$	7.52	8.0	8.48	
I_B	Bias current	$I_L=0$		4.8	6.7	mA
ΔI_B	Bias current differential	$10.5V \leq V_i \leq 23V, I_L=40mA$		0.1	1.5	mA
		$V_i=14V, 1mA \leq I_L \leq 40mA$			0.2	
V_{NO}	Output noise voltage	BW: 10Hz~100kHz		80		μV_{rms}
RR	Ripple rejection ratio	$f=120Hz, V_{in}=0dBm$		56		dB
V_i-V_O	Minimum input-output voltage difference			2.0		V
I_{LP}	Peak load current			150		mA
I_{OS}	Output short circuit sustain current			12.5		mA
TC_{VO}	Temperature coefficient of output voltage	$I_L=5mA$		-0.9		mV/°C

M5278LXX, M5278LXXM

(5V, 5.6V, 8V, 9V, 10V, 12V, 15V) 3-TERMINAL FIXED POSITIVE OUTPUT VOLTAGE REGULATOR (WITH FOLD-BACK PROTECTION CIRCUIT)

M5278L09 ($V_i=16V, I_L=40mA, T_a=25^\circ C, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_O	Output voltage		8.55	9.0	9.45	V
R_{reg-in}	Input regulation	$12V \leq V_i \leq 24V$		60	225	mV
		$13V \leq V_i \leq 24V$		40	170	
R_{reg-L}	Load regulation	$1mA \leq I_L \leq 100mA$		10	90	mV
		$1mA \leq I_L \leq 40mA$		5	40	
V_O	Output voltage	$12V \leq V_i \leq 24V, 1mA \leq I_L \leq 40mA$	8.46	9.0	9.54	V
		$V_i=16V, 1mA \leq I_L \leq 70mA$	8.46	9.0	8.54	
I_B	Bias current	$I_L=0$		4.8	6.7	mA
ΔI_B	Bias current differential	$13V \leq V_i \leq 24V, I_L=40mA$		0.1	1.5	mA
		$V_i=16V, 1mA \leq I_L \leq 40mA$			0.2	
V_{NO}	Output noise voltage	BW: 10Hz~100kHz		90		μV_{rms}
RR	Ripple rejection ratio	$f=120Hz, V_{in}=0dBm$		60		dB
V_i-V_O	Minimum input-output voltage difference			2.0		V
I_{LP}	Peak load current			150		mA
I_{OS}	Output short circuit sustain current			12.5		mA
TC_{V_O}	Temperature coefficient of output voltage	$I_L=5mA$		-0.65		mV/°C

M5278L10 ($V_i=17V, I_L=40mA, T_a=25^\circ C, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_O	Output voltage		9.5	10.0	10.5	V
R_{reg-in}	Input regulation	$12.5V \leq V_i \leq 25V$		70	230	mV
		$13V \leq V_i \leq 25V$		50	170	
R_{reg-L}	Load regulation	$1mA \leq I_L \leq 100mA$		10	90	mV
		$1mA \leq I_L \leq 40mA$		5	45	
V_O	Output voltage	$12.5V \leq V_i \leq 25V, 1mA \leq I_L \leq 40mA$	9.4	10.0	10.6	V
		$V_i=17V, 1mA \leq I_L \leq 70mA$	9.4	10.0	10.6	
I_B	Bias current	$I_L=0$		4.8	6.7	mA
ΔI_B	Bias current differential	$13V \leq V_i \leq 25V, I_L=40mA$		0.1	1.5	mA
		$V_i=17V, 1mA \leq I_L \leq 40mA$			0.2	
V_{NO}	Output noise voltage	BW: 10Hz~100kHz		100		μV_{rms}
RR	Ripple rejection ratio	$f=120Hz, V_{in}=0dBm$	52	59		dB
V_i-V_O	Minimum input-output voltage difference			2.0		V
I_{LP}	Peak load current			130		mA
I_{OS}	Output short circuit sustain current			2.5		mA
TC_{V_O}	Temperature coefficient of output voltage	$I_L=5mA$		-0.9		mV/°C

MITSUBISHI <LINEAR ICs>
M5278LXX, M5278LXXM

**(5V, 5.6V, 8V, 9V, 10V, 12V, 15V) 3-TERMINAL FIXED POSITIVE
OUTPUT VOLTAGE REGULATOR (WITH FOLD-BACK PROTECTION CIRCUIT)**

M5278L12 ($V_i=19V$, $I_L=40mA$, $T_a=25^\circ C$, $C_1=0.33\mu F$, $C_O=0.1\mu F$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_O	Output voltage		11.4	12.0	12.6	V
R_{reg-in}	Input regulation	$14.5V \leq V_i \leq 27V$		70	250	mV
		$16V \leq V_i \leq 27V$		50	200	
R_{reg-L}	Load regulation	$1mA \leq I_L \leq 100mA$		10	100	mV
		$1mA \leq I_L \leq 40mA$		5	50	
V_O	Output voltage	$14.5V \leq V_i \leq 27V$, $1mA \leq I_L \leq 40mA$	11.3	12.0	12.7	V
		$V_i=9V$, $1mA \leq I_L \leq 70mA$	11.3	12.0	12.7	
I_B	Bias current	$I_L=0$		4.8	6.7	mA
ΔI_B	Bias current differential	$16V \leq V_i \leq 27V$, $I_L=40mA$		0.1	1.5	mA
		$V_i=19V$, $1mA \leq I_L \leq 40mA$			0.2	
V_{NO}	Output noise voltage	BW: 10Hz~100kHz		110		μV_{rms}
RR	Ripple rejection ratio	$f=120Hz$, $V_{in}=0dBm$	50	56		dB
V_i-V_O	Minimum input-output voltage difference			2.0		V
I_{LP}	Peak load current			150		mA
I_{OS}	Output short circuit sustain current			12.5		mA
TC_{VO}	Temperature coefficient of output voltage	$I_L=5mA$		-1.0		mV/°C


M5278L15 ($V_i=23V$, $I_L=40mA$, $T_a=25^\circ C$, $C_1=0.33\mu F$, $C_O=0.1\mu F$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_O	Output voltage		14.25	15.0	15.75	V
R_{reg-in}	Input regulation	$17.5V \leq V_i \leq 30V$		80	300	mV
		$20V \leq V_i \leq 30V$		60	250	
R_{reg-L}	Load regulation	$1mA \leq I_L \leq 100mA$		10	150	mV
		$1mA \leq I_L \leq 40mA$		5	75	
V_O	Output voltage	$17.5V \leq V_i \leq 30V$, $1mA \leq I_L \leq 40mA$	14.1	15.0	15.9	V
		$V_i=23V$, $1mA \leq I_L \leq 70mA$	14.1	15.0	15.9	
I_B	Bias current	$I_L=0$		4.8	6.7	mA
ΔI_B	Bias current differential	$23V \leq V_i \leq 30V$, $I_L=40mA$		0.1	1.5	mA
		$V_i=23V$, $1mA \leq I_L \leq 40mA$			0.2	
V_{NO}	Output noise voltage	BW: 10Hz~100kHz		140		μV_{rms}
RR	Ripple rejection ratio	$f=120Hz$, $V_{in}=0dBm$	40	45		dB
V_i-V_O	Minimum input-output voltage difference			2.0		V
I_{LP}	Peak load current			150		mA
I_{OS}	Output short circuit sustain current			12.5		mA
TC_{VO}	Temperature coefficient of output voltage	$I_L=5mA$		-0.9		mV/°C


**(5V, 5.6V, 8V, 9V, 10V, 12V, 15V) 3-TERMINAL FIXED POSITIVE
 OUTPUT VOLTAGE REGULATOR (WITH FOLD-BACK PROTECTION CIRCUIT)**

TYPICAL CHARACTERISTICS


THERMAL DERATING (MAXIMUM RATING)

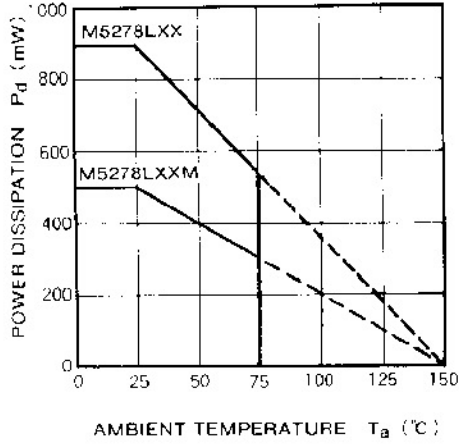


BIAS CURRENT VS. INPUT VOLTAGE

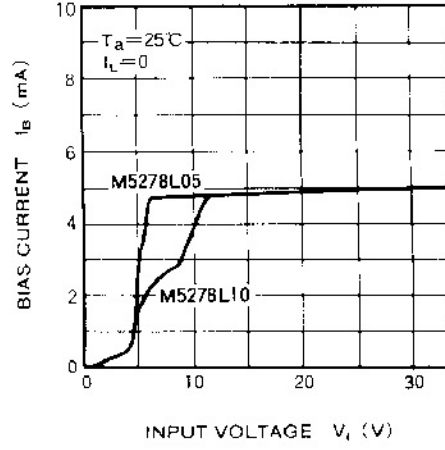


BIAS CURRENT VS. INPUT VOLTAGE

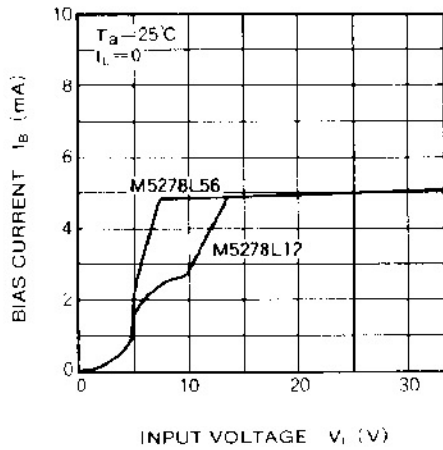


OUTPUT VOLTAGE VS. INPUT VOLTAGE

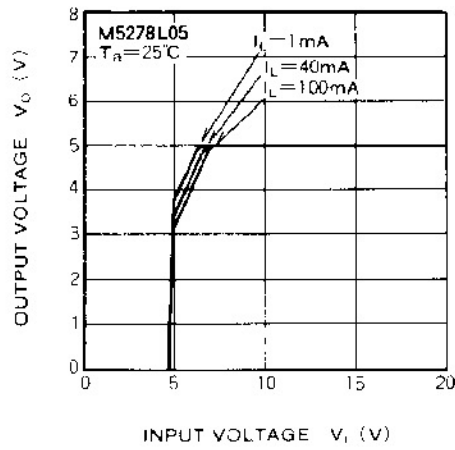

OUTPUT VOLTAGE VS. INPUT VOLTAGE

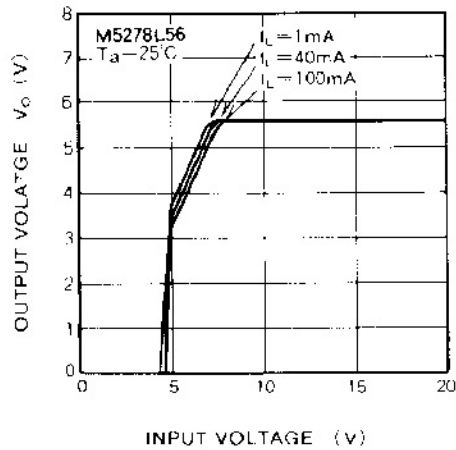


OUTPUT VOLTAGE VS. INPUT VOLTAGE

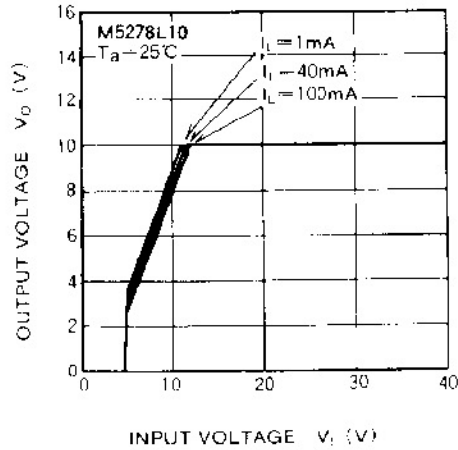


M5278LXX, M5278LXXM

(5V, 5.6V, 8V, 9V, 10V, 12V, 15V) 3-TERMINAL FIXED POSITIVE OUTPUT VOLTAGE REGULATOR (WITH FOLD-BACK PROTECTION CIRCUIT)


OUTPUT VOLTAGE VS. INPUT VOLTAGE

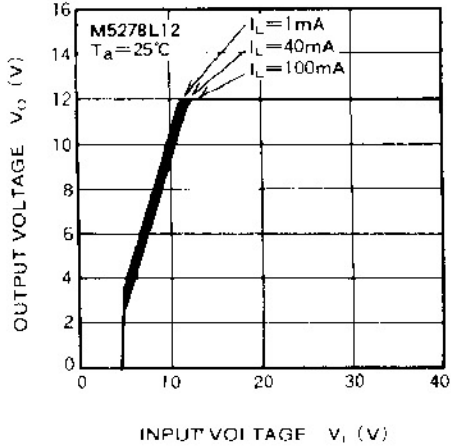


OUTPUT VOLTAGE VS. LOAD CURRENT

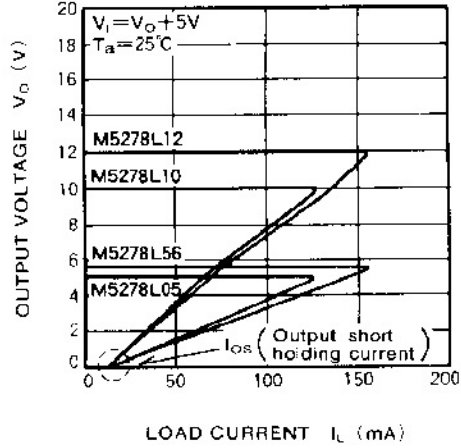


BIAS CURRENT VS. AMBIENT TEMPERATURE

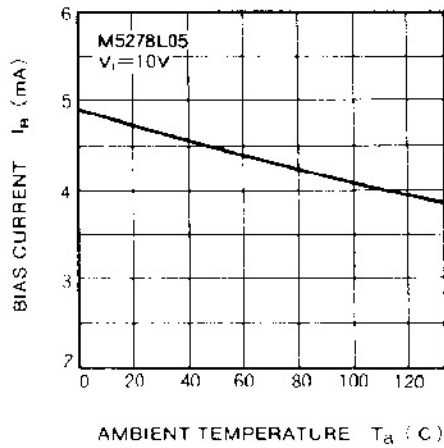

OUTPUT VOLTAGE VS. AMBIENT TEMPERATURE

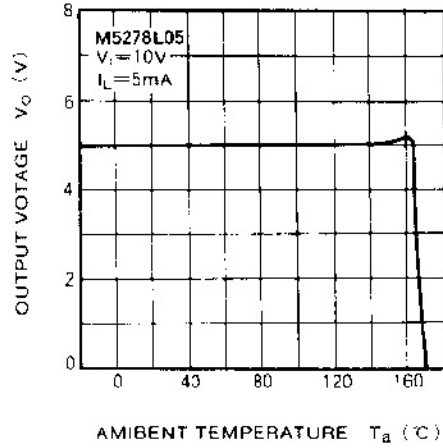


RIPPLE REJECTION VS. FREQUENCY

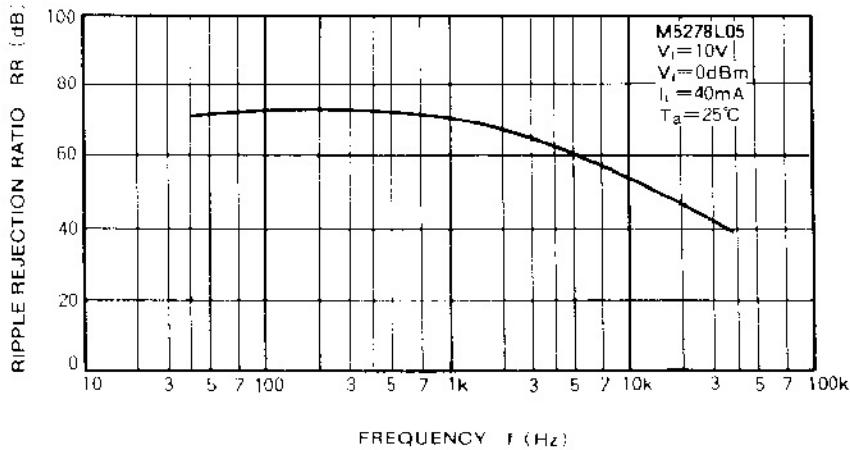

M5278LXX, M5278LXXM

(5V, 5.6V, 8V, 9V, 10V, 12V, 15V) 3-TERMINAL FIXED POSITIVE OUTPUT VOLTAGE REGULATOR (WITH FOLD-BACK PROTECTION CIRCUIT)

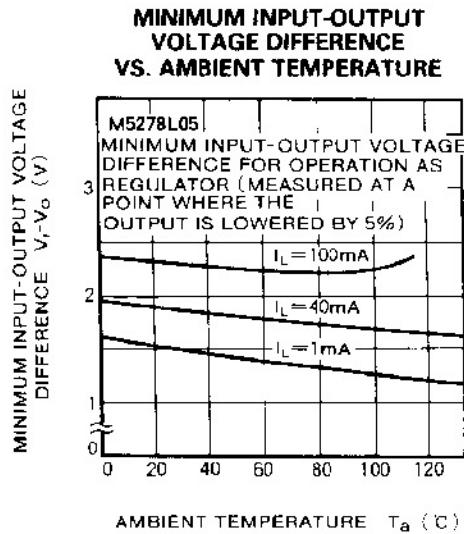

FOLD-BACK PROTECTION CIRCUIT

The M5278L series has been designed to be complete with three-pin, 78L type regulators manufactured by other companies for applications with loading currents in the 100mA class. They additionally have an internalized fold-back protection circuit for protection against shorted loads.

Other 78L units do have an internalized protection circuit known as a drooping type circuit that are rather simple, merely limiting maximum loading current. When large current begins to flow in these units due to a short circuit, abnormal temperatures are generated leading to breakdown and effective setting reliability.

As shown in the diagram, the fold-back protection circuit employed in the M5278L decreases immediately excessive current caused by a short in the load. This not only improves set reliability but permits the elimination of such protection circuits as fuses in the protection circuit.

PRECAUTIONS FOR USE

The current-control circuit requires that, as an IC power supply, this device be operated within the fold-back operating range shown in the accompanying chart.

OUTPUT VOLTAGE VS. LOAD CURRENT

