

SANYO	No.4633	2SA1882/2SC4984
		PNP/NPN Epitaxial Planar Silicon Transistor
Low-Frequency General-Purpose Amp Applications		

Applications

- Low-frequency power amp applications.
- Medium-speed switching.
- Small-sized motor drivers.

Features

- Large current capacity.
- Low collector-to-emitter saturation voltage.

() : 2SA1882

Absolute Maximum Ratings at Ta = 25°C

			unit
Collector-to-Base Voltage	V _{CB0}	(-)15	V
Collector-to-Emitter Voltage	V _{CEO}	(-)15	V
Emitter-to-Base Voltage	V _{EBO}	(-)5	V
Collector Current	I _C	(-)1.5	A
Collector Current (Pulse)	I _{CP}	(-)3	A
Base Current	I _B	(-)300	mA
Collector Dissipation	P _C	1.3	W
		Mounted on ceramic board (250mm ² × 0.8mm)	
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55 to +150	°C

Electrical Characteristics at Ta = 25°C

			min	typ	max	unit
Collector Cutoff Current	I _{CBO}	V _{CB} = (-)12V, I _E = 0			(-)100	nA
Emitter Cutoff Current	I _{EBO}	V _{EB} = (-)4V, I _C = 0			(-)100	nA
DC Current Gain	h _{FE} (1)	V _{CE} = (-)2V, I _C = (-)50mA	140*		560*	
	h _{FE} (2)	V _{CE} = (-)2V, I _C = (-)1A	70			
Gain-Bandwidth Product	f _T	V _{CE} = (-)2V, I _C = (-)50mA	(300)200			MHz
C-E Saturation Voltage	V _{CE(sat)} (1)	I _C = (-)5mA, I _B = (-)0.5mA	(-)10	(-)25		mV
	V _{CE(sat)} (2)	I _C = (-)500mA, I _B = (-)25mA	(-)120	(-)240		mV
B-E Saturation Voltage	V _{BE(sat)}	I _C = (-)500mA, I _B = (-)25mA	(-)0.9	(-)1.2		V
Output Capacitance	C _{ob}	V _{CB} = (-)10V, f = 1MHz	(15)10			pF
C-B Breakdown Voltage	V _{(BR)CBO}	I _C = (-)10μA, I _E = 0	(-)15			V
C-E Breakdown Voltage	V _{(BR)CEO}	I _C = (-)1mA, R _{BE} = ∞	(-)15			V
E-B Breakdown Voltage	V _{(BR)EBO}	I _E = (-)10μA, I _C = 0	(-)5			V


* The 2SA1882/2SC4984 is classified by 50mA h_{FE} as follows:

140 S 280	200 T 400	280 U 560
-----------	-----------	-----------

Marking: 2SA1882 : AI
 : 2SC4984 : CT

Package Dimensions 2038A

(unit: mm)








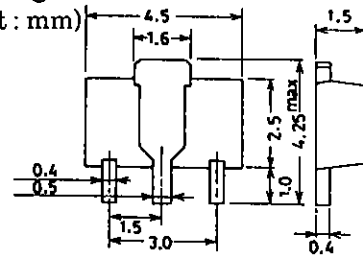










1: Base
 2: Collector
 3: Emitter
 SANYO: PCP
 (Bottom View)




SANYO Electric Co., Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

2SA1882/2SC4984

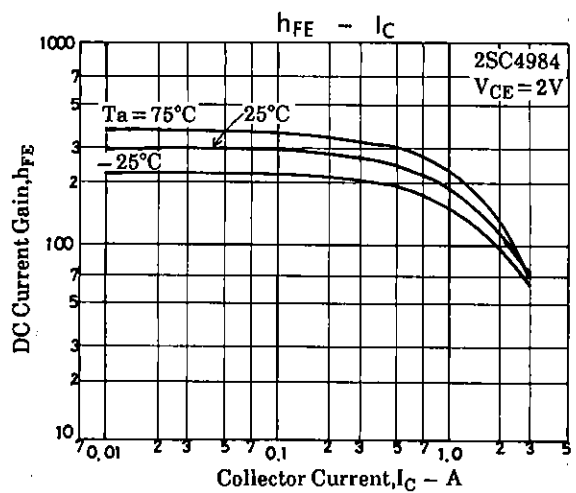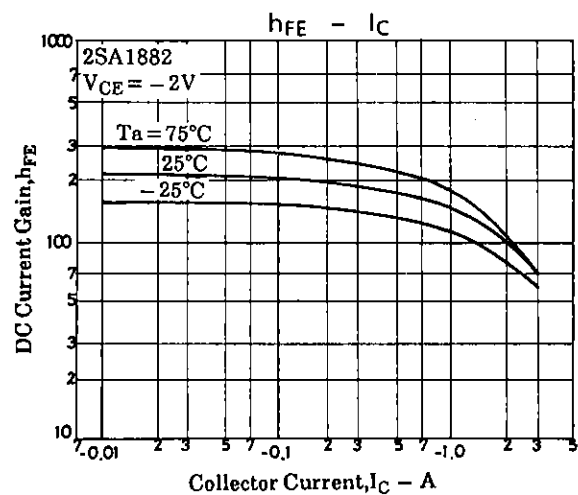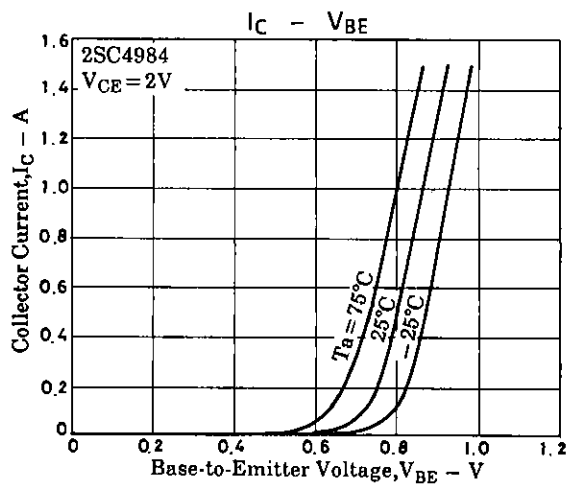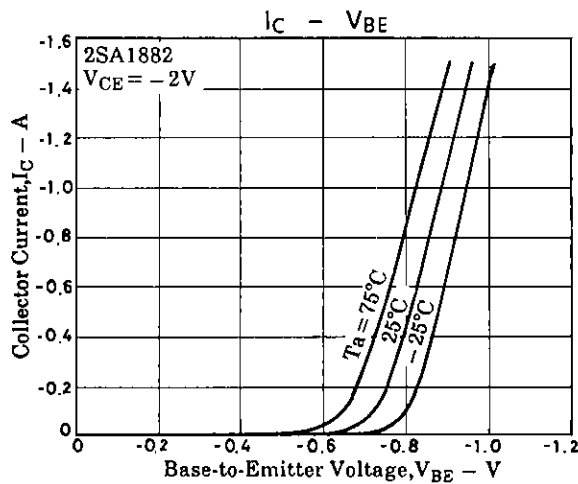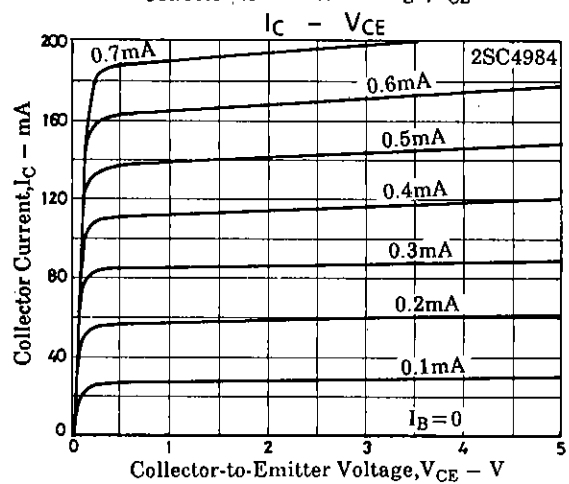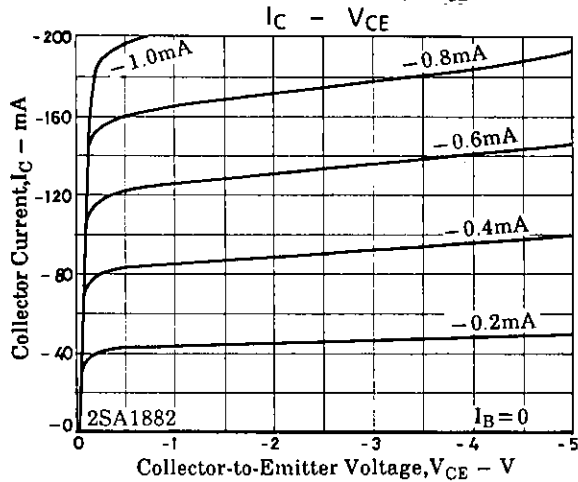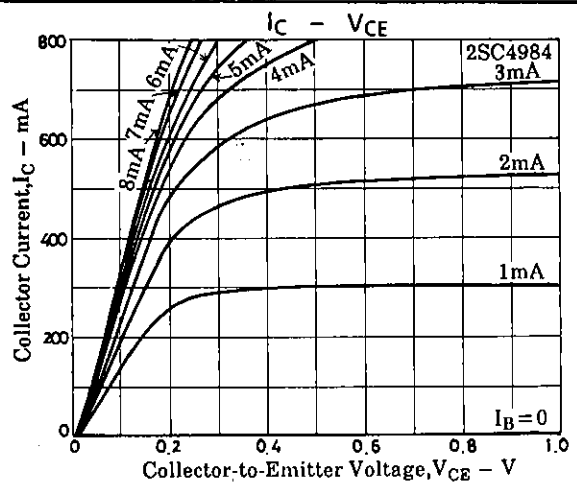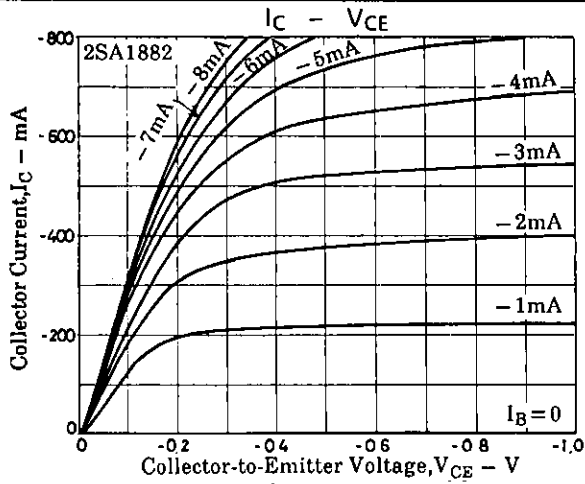

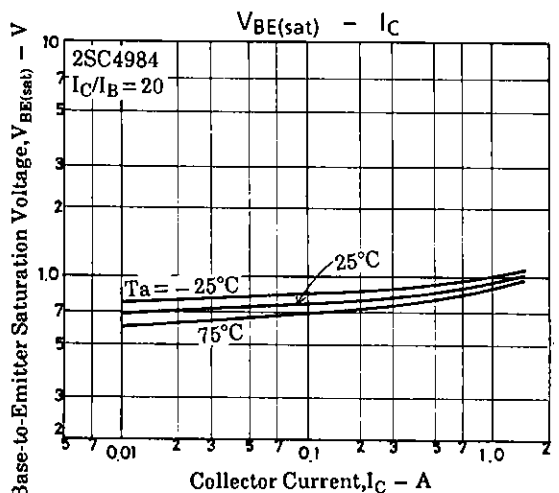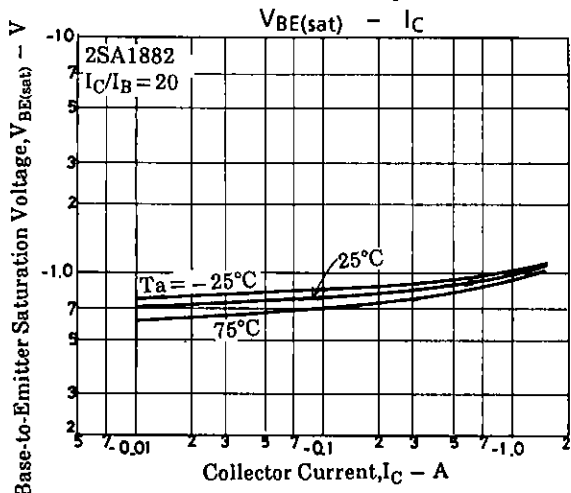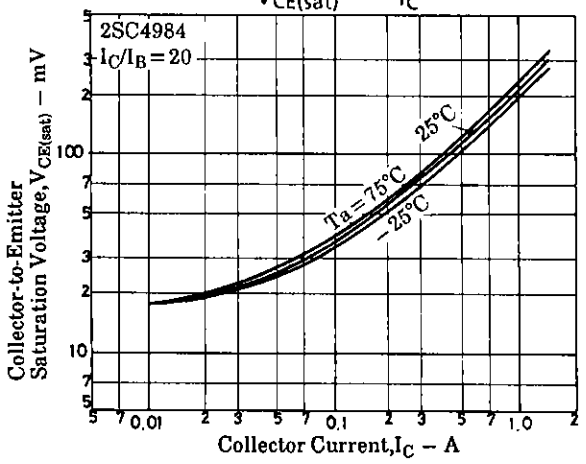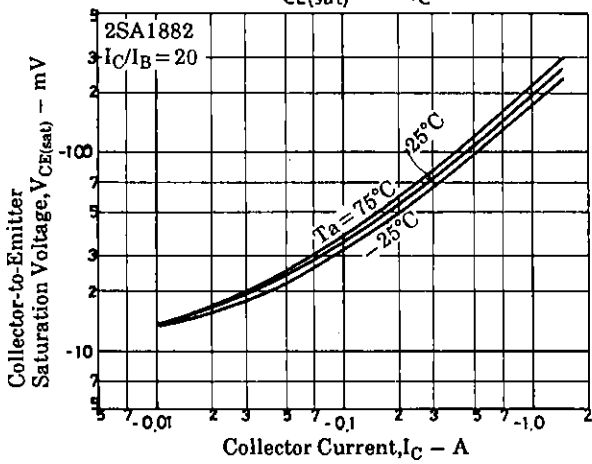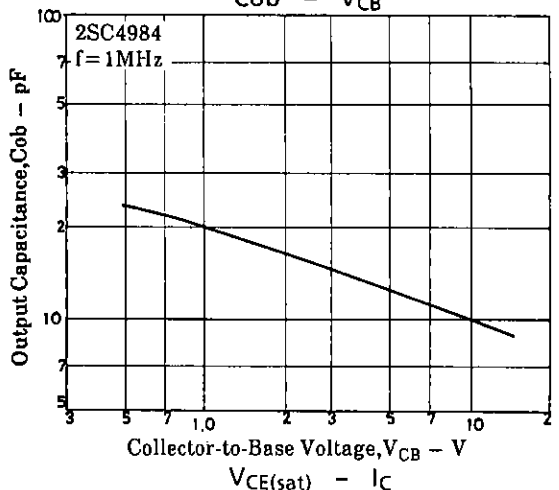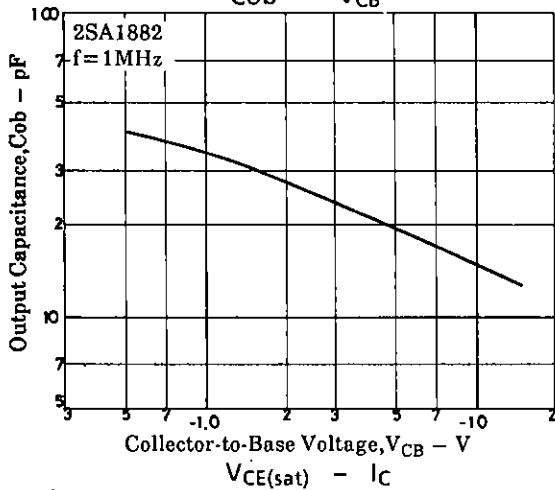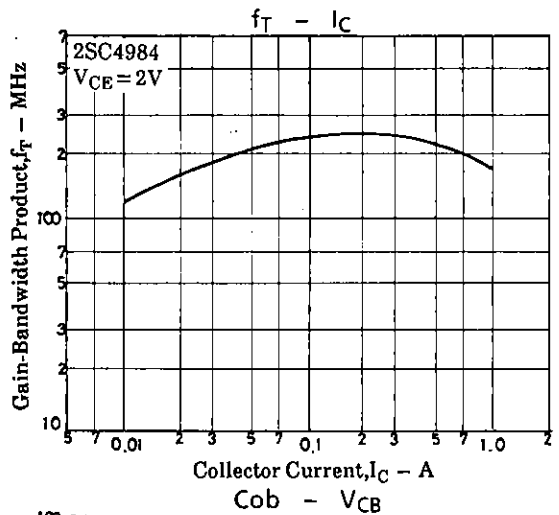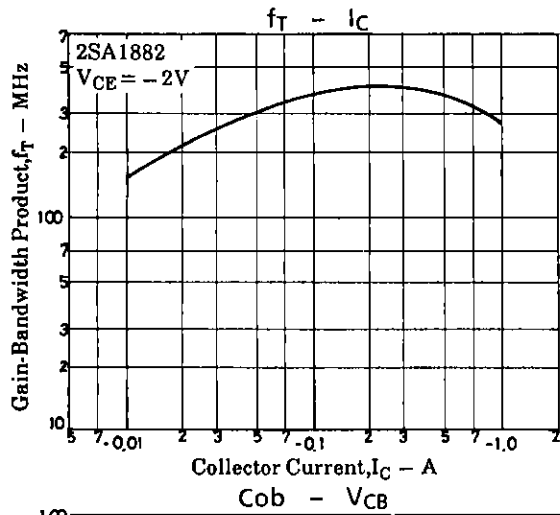

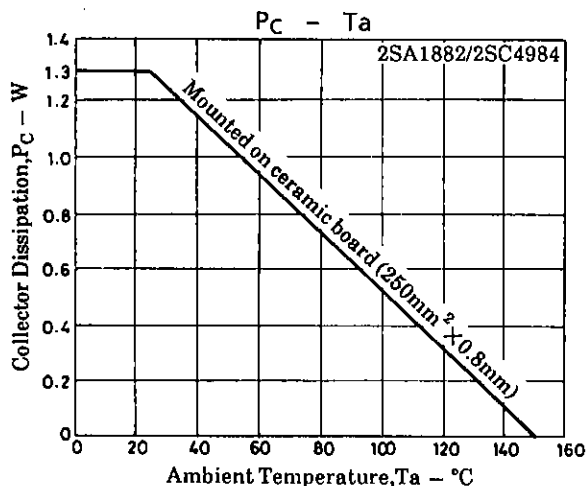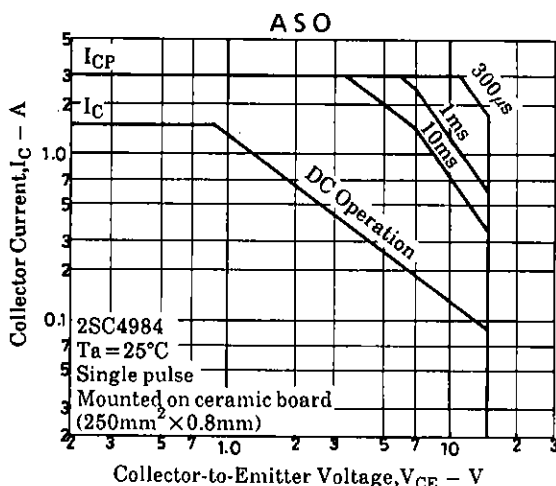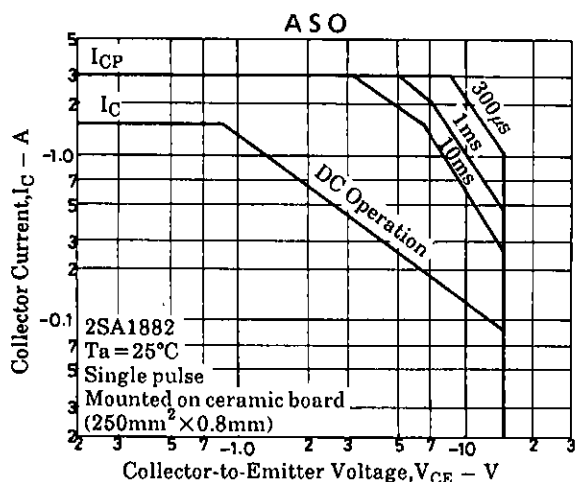

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use.
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.