〈SMALL-SIGNAL TRANSISTOR〉

2SA1369

FOR SMALL TYPE MOTOR, PLUNGER DRIVE APPLICATION
SILICON PNP EPITAXIAL TYPE

DESCRIPTION

2SA1369 is a silicon PNP epitaxial type transistor designed with high collector dissipation, high collector current, high hFE.

Complementary with 2SC3439.

FEATURE

- ●High h_{FE} h_{FE}=400 to 800
- ●High collector current (I_{CM}=-3A, I_C=-1.5A)
- ●Small $V_{CEO(sat)}$ $V_{CEO(sat)}$=-0.25V typ(@I_C=-1A, I_B=-20mA)
- ●High collector dissipation P_C=500mW
- ●Small package for mounting

APPLICATION

Small type motor drive for VCR, tape desk, player, drive for relay.

OUTLINE DRAWING

Unit:mm

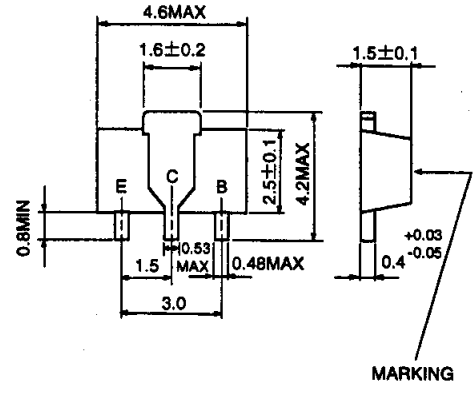

TERMINAL CONNECTOR

E : EMITTER
C : COLLECTOR
B : BASE

EIAJ : SC-62
JEDEC : –

Note)
The dimension without tolerance represent central value.

MARKING

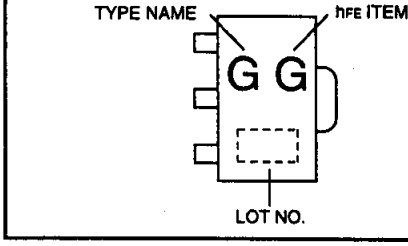

MAXIMUM RATINGS (Ta=25℃)

Symbol	Parameter	Ratings	Unit
V_{CBO}	Collector to Base voltage	-30	V
V_{EBO}	Emitter to Base voltage	-6	V
V_{CEO}	Collector to Emitter voltage	-20	V
I_{CM}	Peak Collector current	-3	A
I_C	Collector current	-1.5	A
P_C	Collector dissipation(Ta=25℃)	500	mW
T_j	Junction temperature	+150	℃
T_{stg}	Storage temperature	-55 to +150	℃

ELECTRICAL CHARACTERISTICS (Ta=25℃)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$V_{(BR)CBO}$	C to B break down voltage	I_C=-10μA,I_E=0	-30			V
$V_{(BR)EBO}$	E to B break down voltage	I_E=-10μA,I_C=0	-6			V
$V_{(BR)CEO}$	C to E break down voltage	I_C=-1mA,R_{BE}=∞	-20			V
I_{CBO}	Collector cut off current	V_{CB}=-20V,I_E=0			-0.1	μA
I_{EBO}	Emitter cut off current	V_{EB}=-2V,I_C=0			-0.1	μA
h_{FE} *	DC forward current gain	V_{CE}=-6V,I_C=-500mA	400		1200	—
$V_{CE(sat)}$	C to E saturation voltage	I_C=-1A,I_B=-20mA		-0.25	-0.5	V
f_T	Gain band width product	V_{CE}=-10V,I_E=10mA		90		MHz
C_{ob}	Collector output capacitance	V_{CB}=-10V,I_E=0, f=1MHz		37		pF

* : It shows h_{FE} classification in right table.

Marking	GG	GH
h_{FE}	400 to 800	600 to 1200

2SA1369

FOR SMALL TYPE MOTOR, PLUNGER DRIVE APPLICATION
SILICON PNP EPITAXIAL TYPE

TYPICAL CHARACTERISTICS

COLLECTOR DISSIPATION VS. AMBIENT TEMPERATURE

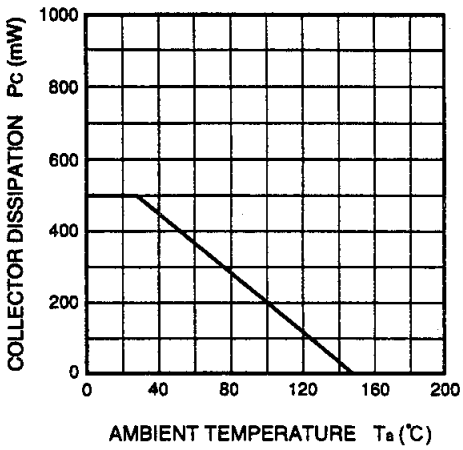

COMMON EMITTER OUTPUT

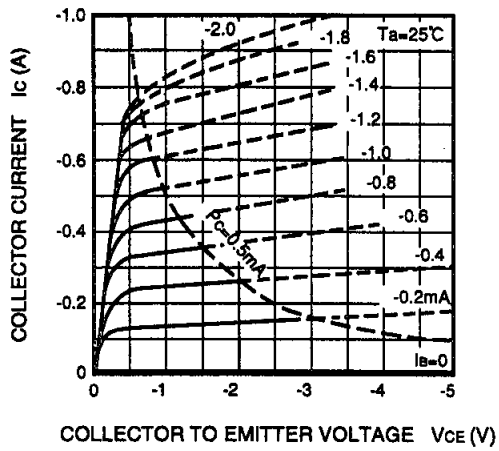

COMMON EMITTER TRANSFER

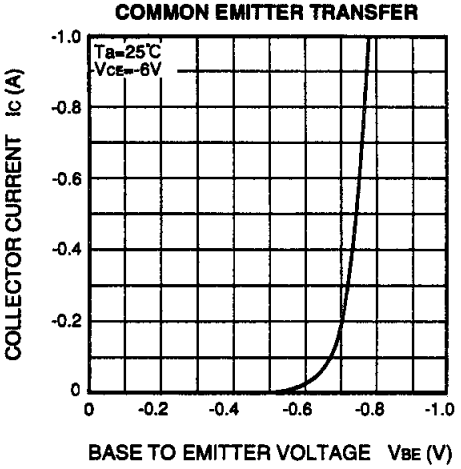

DC FORWARD CURRENT GAIN VS. COLLECTOR CURRENT

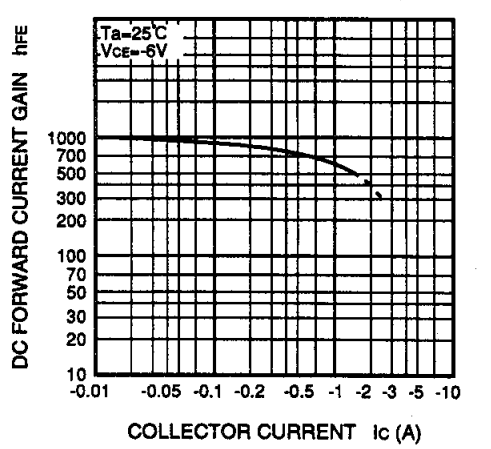

COLLECTOR TO EMITTER SATURATION VOLTAGE VS. BASE CURRENT

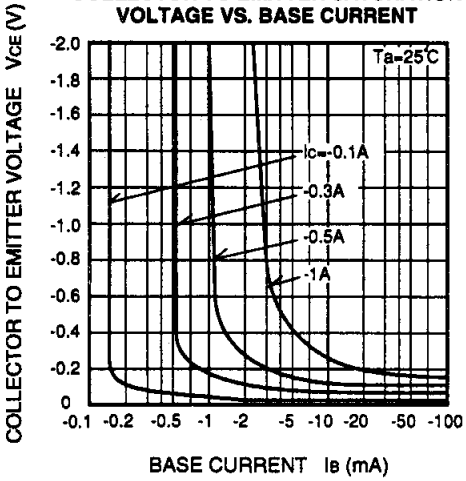

GAIN BAND WIDTH PRODUCT VS. EMITTER CURRENT

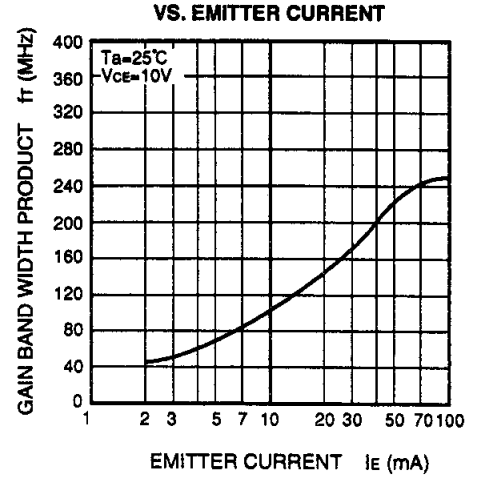

2SA1369

FOR SMALL TYPE MOTOR, PLUNGER DRIVE APPLICATION
SILICON PNP EPITAXIAL TYPE

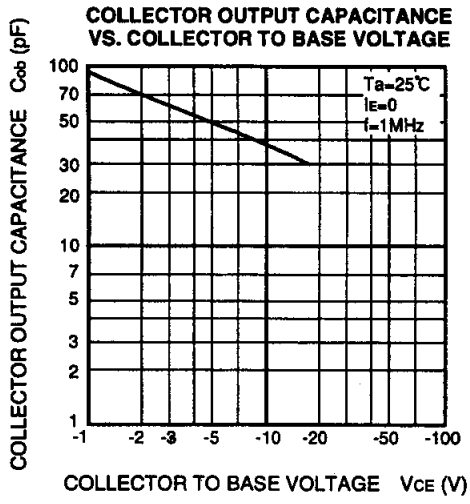

ISAHAYA ELECTRONICS CORPORATION

http://www.idc-com.co.jp
6-41, TSUKUBA, ISAHAYA, NAGASAKI, 854-0065, JAPAN

Keep safety in your circuit designs !

·Isahaya Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.Remember to give consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

·These materials are intended as reference to assist out customers in the selection of the Isahaya semiconductor product best suited to the customer's application, they do not convey any license under any intellectual property rights, or any other rights, belonging to Isahaya Electronics Corporation or a third party.
·Isahaya Electronics Corporation assumes no responsibility for any damage, or infringement of any third-party rights, originating in the use of any product data, diagrams,charts or circuit application examples contained in the materials.
·All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by Isahaya Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Isahaya Electronics Corporation or authorized Isahaya Semiconductor product distributor for the latest product information before purchasing a product listed herein.
·The prior written approval of Isahaya Electronics Corporation is necessary to reprint or reproduce in whole or in part these materials.
·If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
·Please contact Isahaya Electronics Corporation or an authorized Isahaya Semiconductor product distributor for further details on these materials or the products contained therein.