


4.9 mm Square SMD Light Touch Switches

Type: **EVQPL**



■ Features

- External dimensions : 4.9 mm×4.9 mm,
Height: 0.8 mm(Without push plate), 1.5 mm(With push plate)

■ Recommended Applications

- Operation switches for portable electronic equipment (Notebook PC, Camcorders, Portable audio players, etc.)
- Operation switches for car audio systems

■ Explanation of Part Numbers

1	2	3	4	5	6	7	8	9
E	V	Q	P	L		A		
Product Code			Type			Height		

■ Product Chart

Height	H=0.8 mm	H=1.5 mm (With Push Plate)
Packaging	Embossed	Embossed
Operating Force		
1.0 N	EVQPLB	EVQPLD
1.6 N	EVQPLF	EVQPLH
2.6 N	EVQPLK	EVQPLM

■ Specifications









Type	Snap action/Push-on type SPST		
Electrical	Rating	10 μ A 2 Vdc to 20 mA 15 Vdc (Resistive load)	
	Contact Resistance	50 m Ω max.	
	Insulation Resistance	50 M Ω min. (at 100 Vdc)	
	Dielectric Withstanding Voltage	250 Vac for 1 minute	
	Bouncing	3 ms max. (ON) 8 ms max. (OFF)	
Mechanical	Operating Force	1.0 N $\pm$ 0.5 N 1.6 N $\pm$ 0.5 N	2.6 N $\pm$ 0.6 N
	Travel	0.25 mm ^{+0.10} / _{-0.20} mm	
Endurance	Operating Life	500000 cycles min.	200000 cycles min.
Operating Temperature		-20 °C to +70 °C	
Storage Temperature		-40 °C to +85 °C (Bulk) -20 °C to +60 °C (Taping)	
Minimum Quantity/Packing Unit		5000 pcs. Embossed Taping (Reel Pack)	
Quantity/Cartron		25000 pcs.	

Note: Non washable

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


00 Sep. 2010

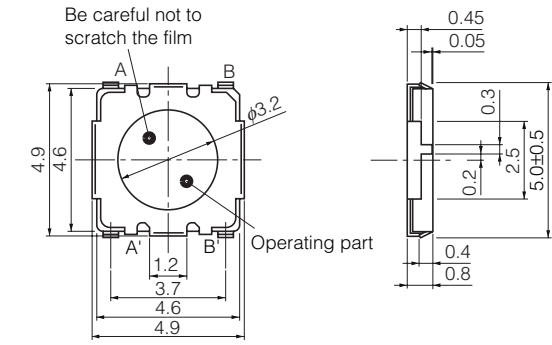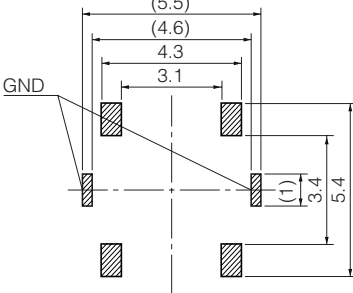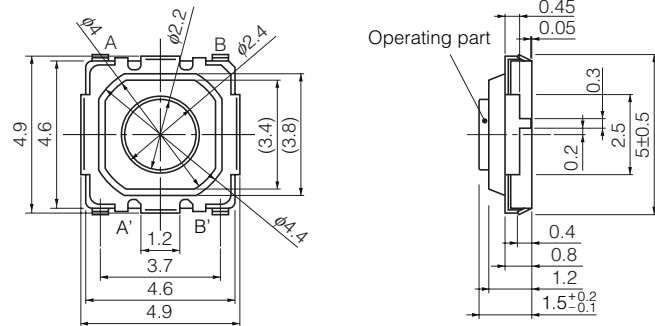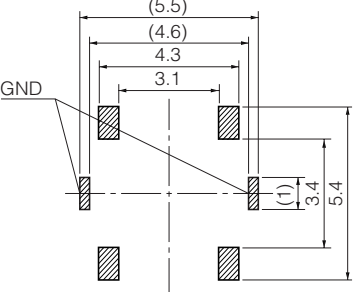■ Dimensions in mm (not to scale)


No. 1 EVQPLB EVQPLF EVQPLK (Embossed Taping) Surface mount For reflow soldering Without push plate 	Be careful not to scratch the film  Operating part   Circuit diagram  PWB land pattern for reference		
Part Numbers	Operating Force	Height	Operating Life
EVQPLBA08	1.0 N	0.8 mm	500000 cycles
EVQPLFA08	1.6 N	0.8 mm	500000 cycles
EVQPLKA08	2.6 N	0.8 mm	200000 cycles
No. 2 EVQPLD EVQPLH EVQPLM (Embossed Taping) Surface mount For reflow soldering With push plate 	 Operating part   Circuit diagram  PWB land pattern for reference		
Part Numbers	Operating Force	Height	Operating Life
EVQPLDA15	1.0 N	1.5 mm	500000 cycles
EVQPLHA15	1.6 N	1.5 mm	500000 cycles
EVQPLMA15	2.6 N	1.5 mm	200000 cycles

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

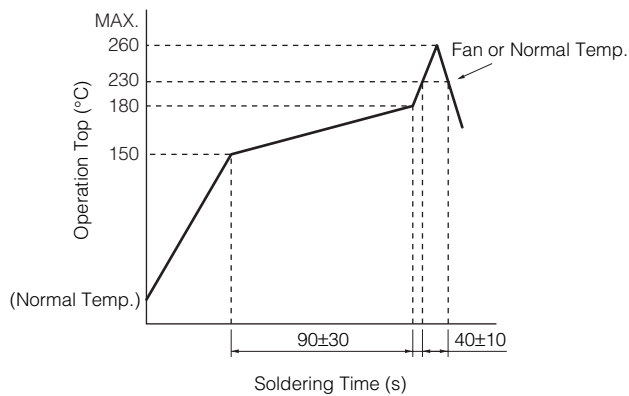■ Recommended Reflow Soldering Conditions




● Embossed Carrier Taping

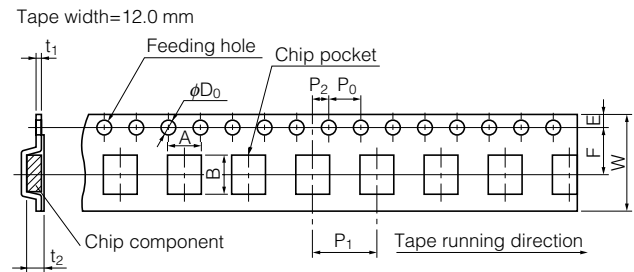

Unit: mm

Part No.	Height	A	B	W	F	E	P_1	P_2	P_0	D_0 Dia.	t_1	t_2
EVQPL	0.8/1.5	5.0 ± 0.2	5.0 ± 0.2	12.0 ± 0.3	5.5 ± 0.1	1.75 ± 0.10	8.0 ± 0.1	2.0 ± 0.1	4.0 ± 0.1	$1.5^{+0.1}_{-0}$	0.35 ± 0.05	$1.0/1.7 \pm 0.2$

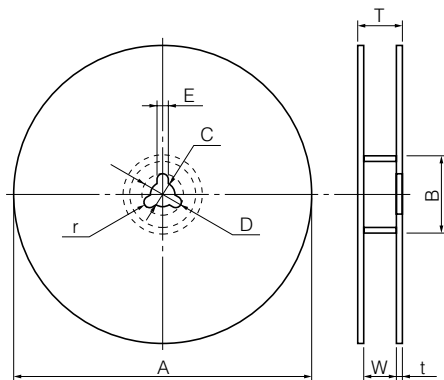
● Standard Reel Dimensions in mm (not to scale)




Item	A	B	C	D	E
Rate (mm)	$\phi 370.0 \pm 2.0$	$\phi 50.0$ min.	$\phi 13.0 \pm 0.5$	$\phi 21.0 \pm 1.0$	2.0 ± 0.5

Item	W	T	t	r
Rate (mm)	14.0 ± 1.5	—	1.0 to 3.0	1.0 ± 0.5

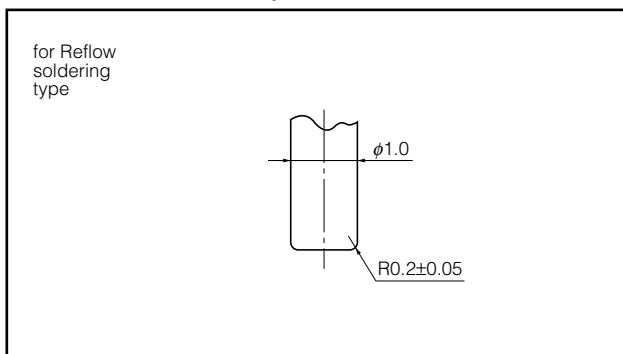■ Recommended Shape of Test Pole



■ Recommended Operating Conditions

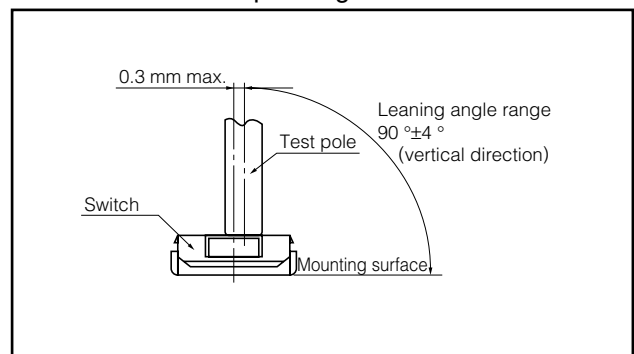

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Sep. 2010