

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

Preferred Devices

## Dual Bias Resistor Transistors

### NPN and PNP Silicon Surface Mount Transistors with Monolithic Bias Resistor Network

The BRT (Bias Resistor Transistor) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base-emitter resistor. These digital transistors are designed to replace a single device and its external resistor bias network. The BRT eliminates these individual components by integrating them into a single device. In the NSBC114EPDXV6T1 series, two complementary BRT devices are housed in the SOT-563 package which is ideal for low power surface mount applications where board space is at a premium.

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- Available in 8 mm, 7 inch Tape and Reel
- Lead Free Solder Plating

**MAXIMUM RATINGS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted, common for  $Q_1$  and  $Q_2$ , – minus sign for  $Q_1$  (PNP) omitted)

Rating	Symbol	Value	Unit
Collector-Base Voltage	$V_{CB0}$	50	Vdc
Collector-Emitter Voltage	$V_{CEO}$	50	Vdc
Collector Current	$I_C$	100	mAdc

#### THERMAL CHARACTERISTICS



Characteristic (One Junction Heated)	Symbol	Max	Unit
Total Device Dissipation $T_A = 25^\circ\text{C}$	$P_D$	357 (Note 1)	mW
Derate above $25^\circ\text{C}$		2.9 (Note 1)	mW/ $^\circ\text{C}$
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	350 (Note 1)	$^\circ\text{C}/\text{W}$
Characteristic (Both Junctions Heated)	Symbol	Max	Unit
Total Device Dissipation $T_A = 25^\circ\text{C}$	$P_D$	500 (Note 1)	mW
Derate above $25^\circ\text{C}$		4.0 (Note 1)	mW/ $^\circ\text{C}$
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	250 (Note 1)	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature	$T_J, T_{stg}$	-55 to +150	$^\circ\text{C}$

1. FR-4 @ Minimum Pad



ON Semiconductor®

<http://onsemi.com>

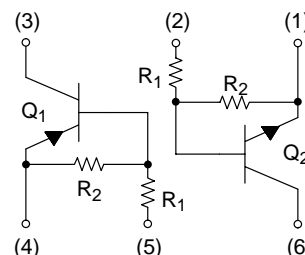

SOT-563  
CASE 463A  
PLASTIC

#### MARKING DIAGRAM



xx = Specific Device Code  
(see table on page 2)  
D = Date Code

#### ORDERING INFORMATION

Device	Package	Shipping
NSBC114EPDXV6T1	SOT-563	4 mm pitch 4000/Tape & Reel
NSBC114EPDXV6T5	SOT-563	2 mm pitch 8000/Tape & Reel

#### DEVICE MARKING INFORMATION

See specific marking information in the device marking table on page 2 of this data sheet.

Preferred devices are recommended choices for future use and best overall value.

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## DEVICE MARKING AND RESISTOR VALUES

Device	Package	Marking	R1 (kΩ)	R2 (kΩ)
NSBC114EPDXV6T1	SOT-563	11	10	10
NSBC124EPDXV6T1	SOT-563	12	22	22
NSBC144EPDXV6T1	SOT-563	13	47	47
NSBC114YPDXV6T1	SOT-563	14	10	47
NSBC114TPDXV6T1 (Note 2)	SOT-563	15	10	∞
NSBC143TPDXV6T1 (Note 2)	SOT-563	16	4.7	∞
NSBC113EPDXV6T1 (Note 2)	SOT-563	30	1.0	1.0
NSBC123EPDXV6T1 (Note 2)	SOT-563	31	2.2	2.2
NSBC143EPDXV6T1 (Note 2)	SOT-563	32	4.7	4.7
NSBC143ZPDXV6T1 (Note 2)	SOT-563	33	4.7	47
NSBC124XPDXV6T1 (Note 2)	SOT-563	34	22	47
NSBC123JPDXV6T1 (Note 2)	SOT-563	35	2.2	47

## ELECTRICAL CHARACTERISTICS

(T<sub>A</sub> = 25°C unless otherwise noted, common for Q<sub>1</sub> and Q<sub>2</sub>, – minus sign for Q<sub>1</sub> (PNP) omitted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

### OFF CHARACTERISTICS

Collector-Base Cutoff Current (V <sub>CB</sub> = 50 V, I <sub>E</sub> = 0)	I <sub>CBO</sub>	–	–	100	nAdc
Collector-Emitter Cutoff Current (V <sub>CE</sub> = 50 V, I <sub>B</sub> = 0)	I <sub>CEO</sub>	–	–	500	nAdc
Emitter-Base Cutoff Current (V <sub>EB</sub> = 6.0 V, I <sub>C</sub> = 0)	I <sub>EBO</sub>	–	–	0.5	mAdc
	NSBC114EPDXV6T1	–	–	0.2	
	NSBC124EPDXV6T1	–	–	0.1	
	NSBC144EPDXV6T1	–	–	0.2	
	NSBC114YPDXV6T1	–	–	0.9	
	NSBC114TPDXV6T1	–	–	1.9	
	NSBC143TPDXV6T1	–	–	4.3	
	NSBC113EPDXV6T1	–	–	2.3	
	NSBC123EPDXV6T1	–	–	1.5	
	NSBC143EPDXV6T1	–	–	0.18	
	NSBC143ZPDXV6T1	–	–	0.13	
	NSBC124XPDXV6T1	–	–	0.2	
	NSBC123JPDXV6T1	–	–	–	
Collector-Base Breakdown Voltage (I <sub>C</sub> = 10 μA, I <sub>E</sub> = 0)	V <sub>(BR)CBO</sub>	50	–	–	Vdc
Collector-Emitter Breakdown Voltage (Note 3) (I <sub>C</sub> = 2.0 mA, I <sub>B</sub> = 0)	V <sub>(BR)CEO</sub>	50	–	–	Vdc

### ON CHARACTERISTICS (Note 3)

DC Current Gain (V <sub>CE</sub> = 10 V, I <sub>C</sub> = 5.0 mA)	NSBC114EPDXV6T1 NSBC124EPDXV6T1 NSBC144EPDXV6T1 NSBC114YPDXV6T1 NSBC114TPDXV6T1 NSBC143TPDXV6T1 NSBC113EPDXV6T1 NSBC123EPDXV6T1 NSBC143EPDXV6T1 NSBC143ZPDXV6T1 NSBC124XPDXV6T1 NSBC123JPDXV6T1	h <sub>FE</sub>	35 60 80 80 160 160 3.0 8.0 15 80 80 80	60 100 140 140 350 350 5.0 15 30 200 150 140	– – – – – – – – – – – –	
Collector-Emitter Saturation Voltage (I <sub>C</sub> = 10 mA, I <sub>B</sub> = 0.3 mA) (I <sub>C</sub> = 10 mA, I <sub>B</sub> = 5 mA) NSBC113EPDXV6T1/NSBC123EPDXV6T1 (I <sub>C</sub> = 10 mA, I <sub>B</sub> = 1 mA) NSBC114TPDXV6T1/NSBC143TPDXV6T1 NSBC143EPDXV6T1/NSBC143ZPDXV6T1/NSBC124XPDXV6T1		V <sub>CE(sat)</sub>	–	–	0.25	Vdc

2. New resistor combinations. Updated curves to follow in subsequent data sheets.
3. Pulse Test: Pulse Width < 300 μs, Duty Cycle < 2.0%

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## ELECTRICAL CHARACTERISTICS

(T<sub>A</sub> = 25°C unless otherwise noted, common for Q<sub>1</sub> and Q<sub>2</sub>, – minus sign for Q<sub>1</sub> (PNP) omitted)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>ON CHARACTERISTICS</b> (Note 3)					
Output Voltage (on) (V <sub>CC</sub> = 5.0 V, V <sub>B</sub> = 2.5 V, R <sub>L</sub> = 1.0 kΩ)	V <sub>OL</sub>	–	–	0.2	Vdc
NSBC114EPDXV6T1		–	–	0.2	
NSBC124EPDXV6T1		–	–	0.2	
NSBC114YPDXV6T1		–	–	0.2	
NSBC114TPDXV6T1		–	–	0.2	
NSBC143TPDXV6T1		–	–	0.2	
NSBC113EPDXV6T1		–	–	0.2	
NSBC123EPDXV6T1		–	–	0.2	
NSBC143EPDXV6T1		–	–	0.2	
NSBC143ZPDXV6T1		–	–	0.2	
NSBC124XPDXV6T1		–	–	0.2	
NSBC123JPDXV6T1		–	–	0.2	
(V <sub>CC</sub> = 5.0 V, V <sub>B</sub> = 3.5 V, R <sub>L</sub> = 1.0 kΩ)		–	–	0.2	
NSBC144EPDXV6T1		–	–	0.2	
Output Voltage (off) (V <sub>CC</sub> = 5.0 V, V <sub>B</sub> = 0.5 V, R <sub>L</sub> = 1.0 kΩ) (V <sub>CC</sub> = 5.0 V, V <sub>B</sub> = 0.050 V, R <sub>L</sub> = 1.0 kΩ) (V <sub>CC</sub> = 5.0 V, V <sub>B</sub> = 0.25 V, R <sub>L</sub> = 1.0 kΩ)	V <sub>OH</sub>	4.9	–	–	Vdc
NSBC113EPDXV6T1					
NSBC114TPDXV6T1					
NSBC143TPDXV6T1					
NSBC143ZPDXV6T1					
Input Resistor	R1	7.0	10	13	k Ω
NSBC114EPDXV6T1		15.4	22	28.6	
NSBC124EPDXV6T1		32.9	47	61.1	
NSBC144EPDXV6T1		7.0	10	13	
NSBC114YPDXV6T1		7.0	10	13	
NSBC114TPDXV6T1		3.3	4.7	6.1	
NSBC143TPDXV6T1		0.7	1.0	1.3	
NSBC113EPDXV6T1		1.5	2.2	2.9	
NSBC123EPDXV6T1		3.3	4.7	6.1	
NSBC143EPDXV6T1		3.3	4.7	6.1	
NSBC143ZPDXV6T1		15.4	22	28.6	
NSBC124XPDXV6T1		1.54	2.2	2.86	
NSBC123JPDXV6T1					
Resistor Ratio	R1/R2	0.8	1.0	1.2	
NSBC114EPDXV6T1/NSBC124EPDXV6T1/NSBC144EPDXV6T1		0.17	0.21	0.25	
NSBC114YPDXV6T1		–	–	–	
NSBC114TPDXV6T1/NSBC143TPDXV6T1		0.8	1.0	1.2	
NSBC113EPDXV6T1/NSBC123EPDXV6T1/NSBC143EPDXV6T1		0.055	0.1	0.185	
NSBC143ZPDXV6T1		0.38	0.47	0.56	
NSBC124XPDXV6T1		0.038	0.047	0.056	
NSBC123JPDXV6T1					

2. New resistor combinations. Updated curves to follow in subsequent data sheets.

3. Pulse Test: Pulse Width < 300 μs, Duty Cycle < 2.0%

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

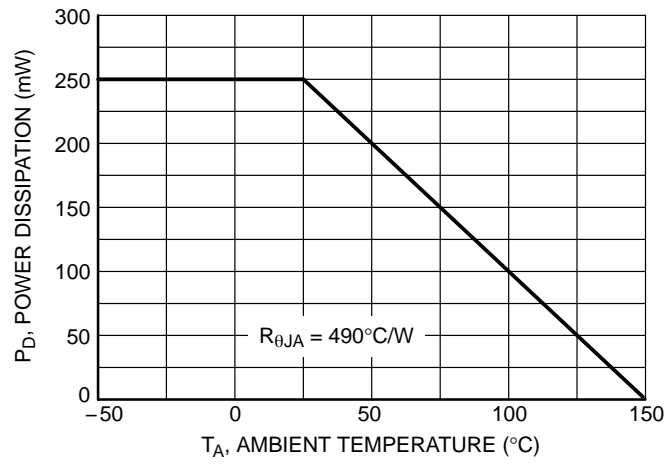


Figure 1. Derating Curve

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## TYPICAL ELECTRICAL CHARACTERISTICS – NSBC114EPDXV6T1 NPN TRANSISTOR

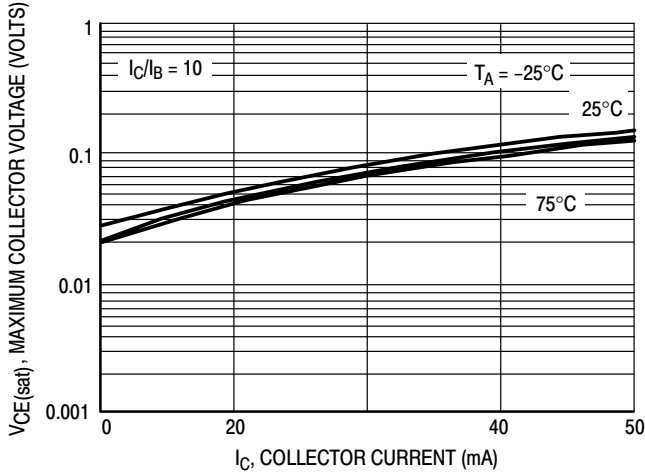


Figure 2.  $V_{CE(sat)}$  versus  $I_C$

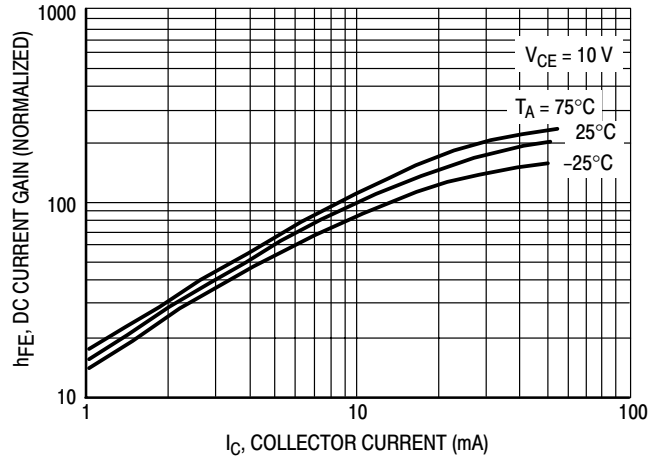


Figure 3. DC Current Gain

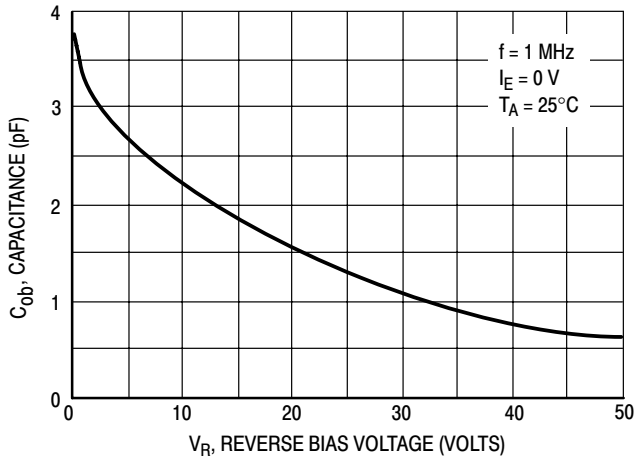


Figure 4. Output Capacitance

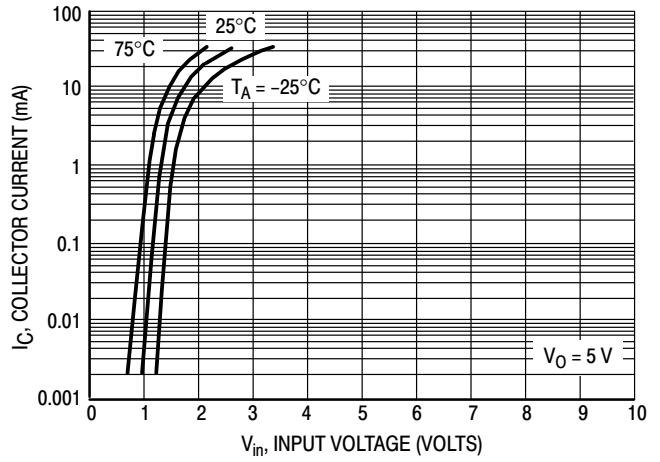


Figure 5. Output Current versus Input Voltage

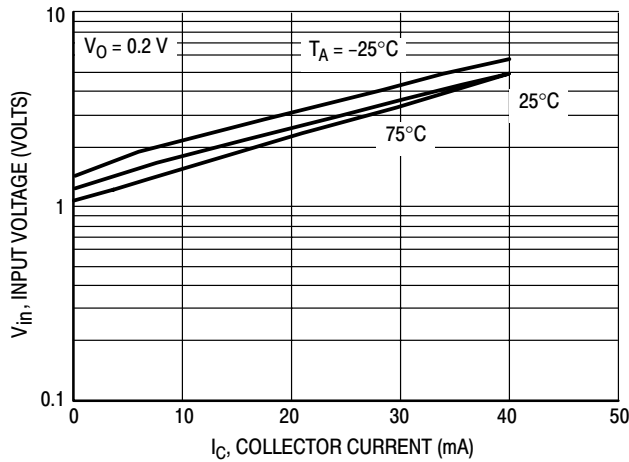


Figure 6. Input Voltage versus Output Current

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## TYPICAL ELECTRICAL CHARACTERISTICS – NSBC114EPDXV6T1 PNP TRANSISTOR

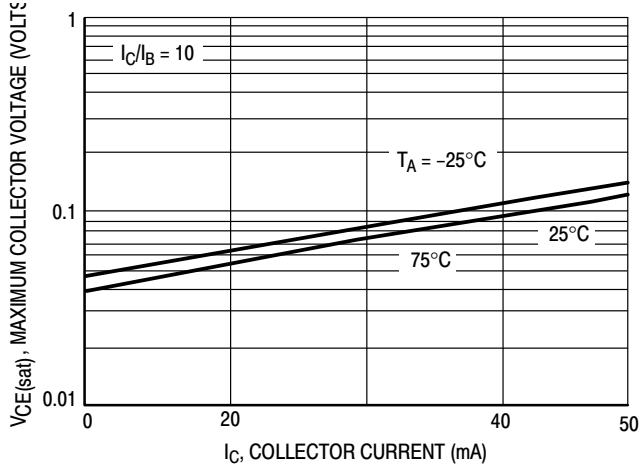


Figure 7.  $V_{CE(sat)}$  versus  $I_C$

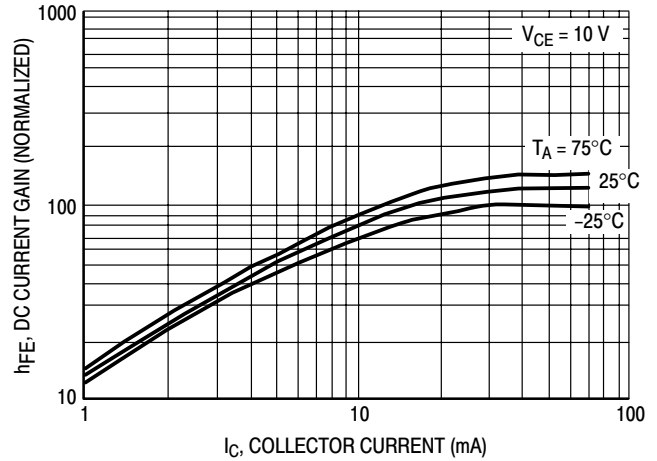


Figure 8. DC Current Gain

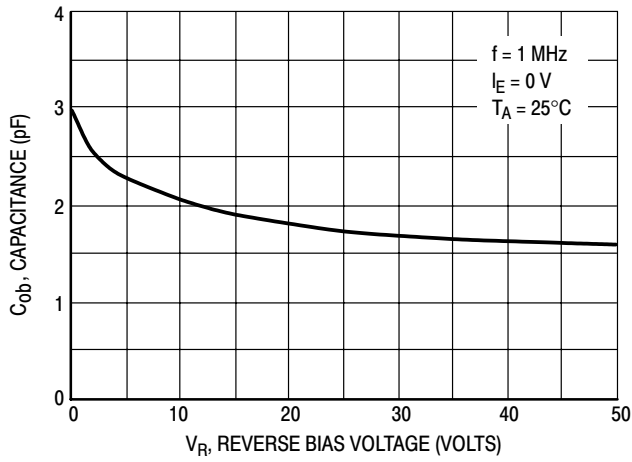


Figure 9. Output Capacitance

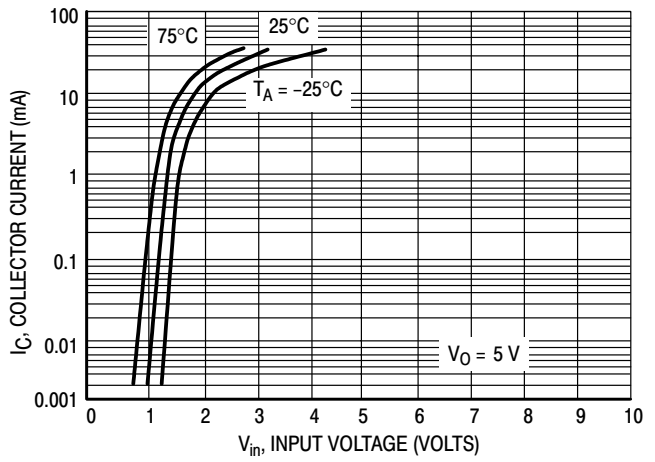


Figure 10. Output Current versus Input Voltage

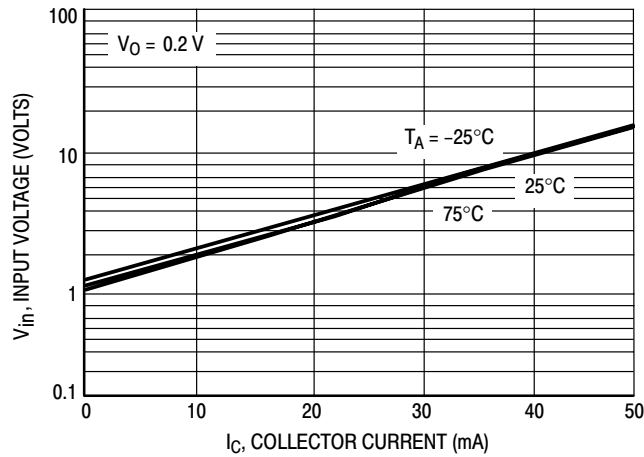


Figure 11. Input Voltage versus Output Current

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## TYPICAL ELECTRICAL CHARACTERISTICS – NSBC124EPDXV6T1 NPN TRANSISTOR

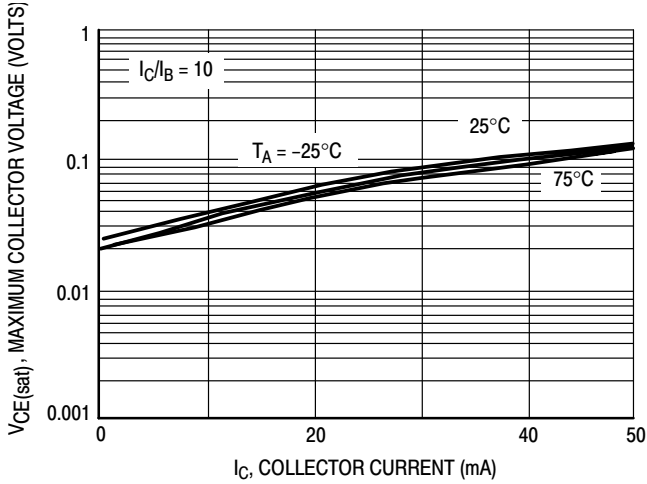


Figure 12.  $V_{CE(sat)}$  versus  $I_C$

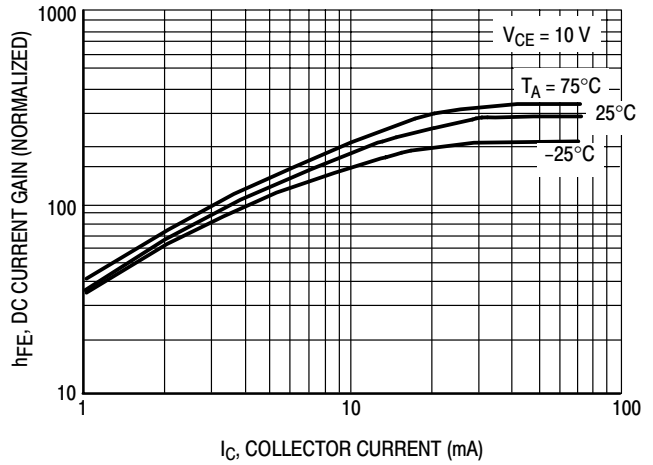


Figure 13. DC Current Gain

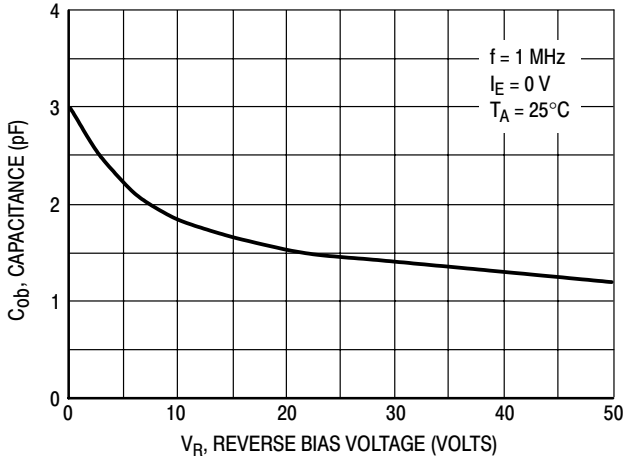


Figure 14. Output Capacitance

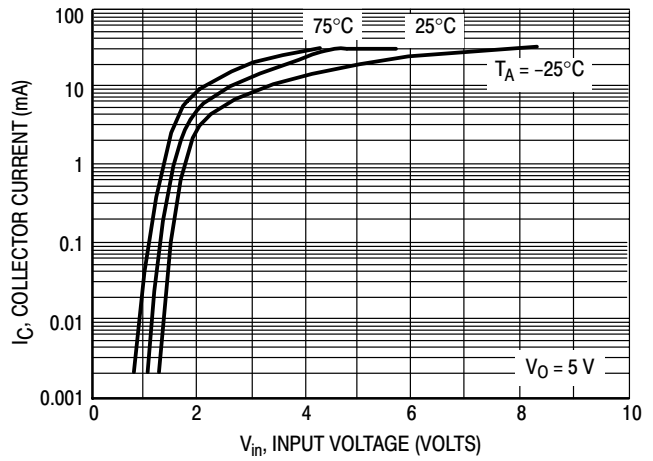


Figure 15. Output Current versus Input Voltage

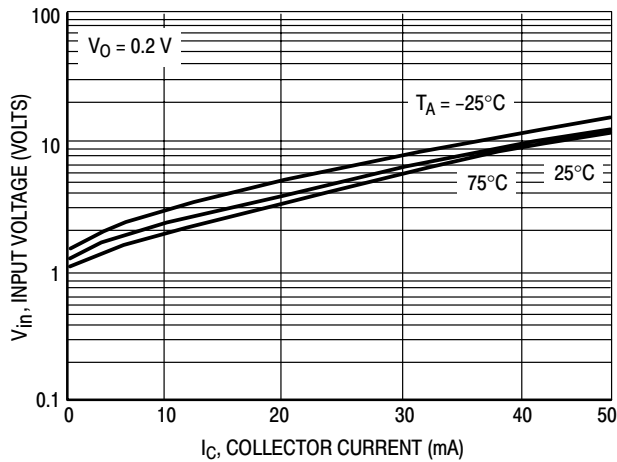


Figure 16. Input Voltage versus Output Current

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## TYPICAL ELECTRICAL CHARACTERISTICS – NSBC124EPDXV6T1 PNP TRANSISTOR

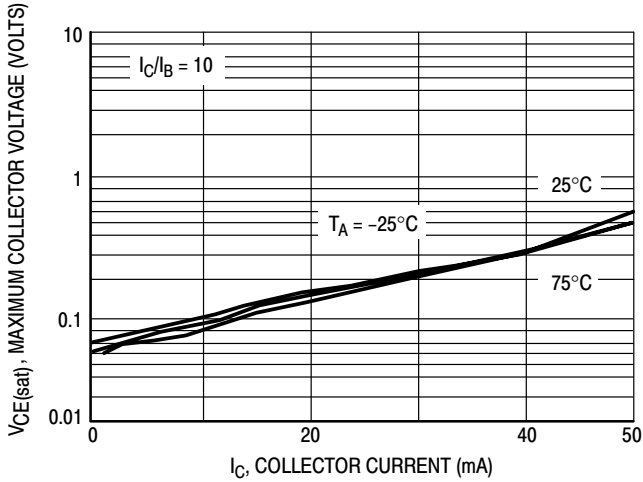


Figure 17.  $V_{CE(sat)}$  versus  $I_C$

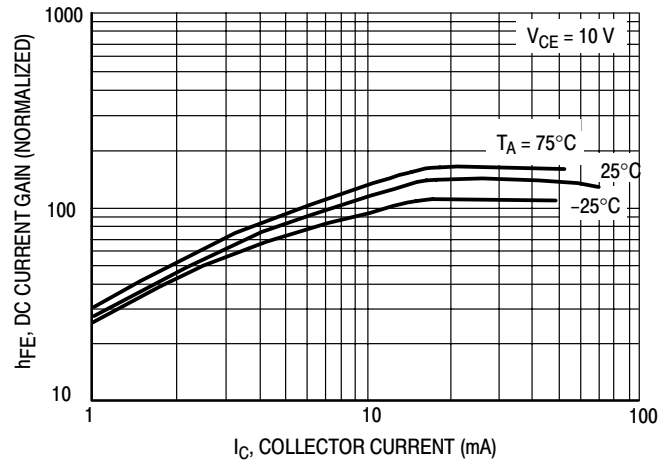


Figure 18. DC Current Gain

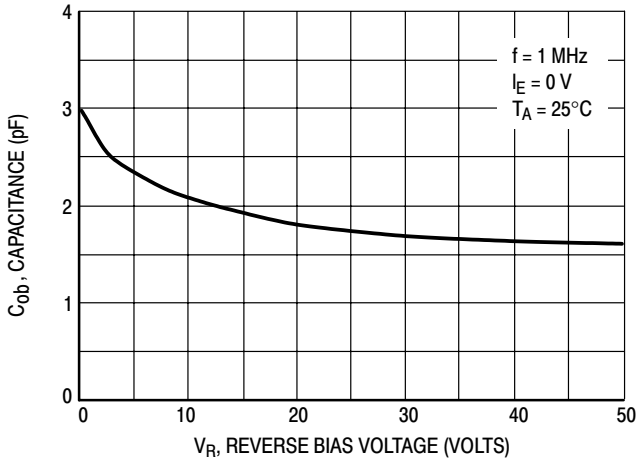


Figure 19. Output Capacitance

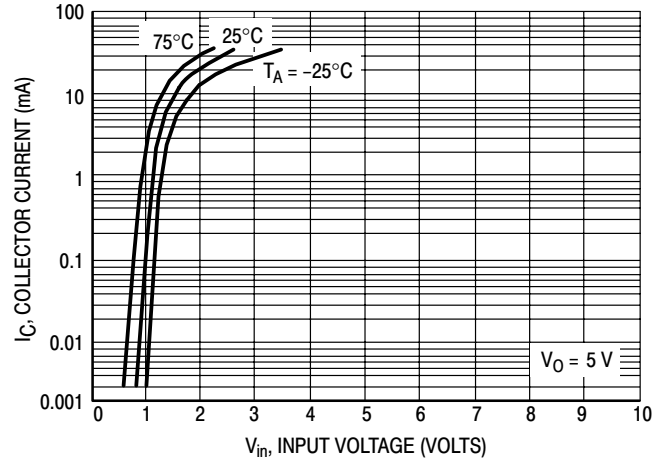


Figure 20. Output Current versus Input Voltage

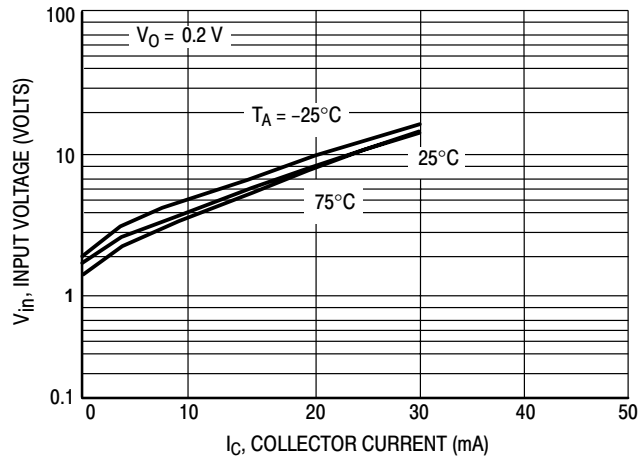


Figure 21. Input Voltage versus Output Current



# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## TYPICAL ELECTRICAL CHARACTERISTICS – NSBC144EPDXV6T1 NPN TRANSISTOR

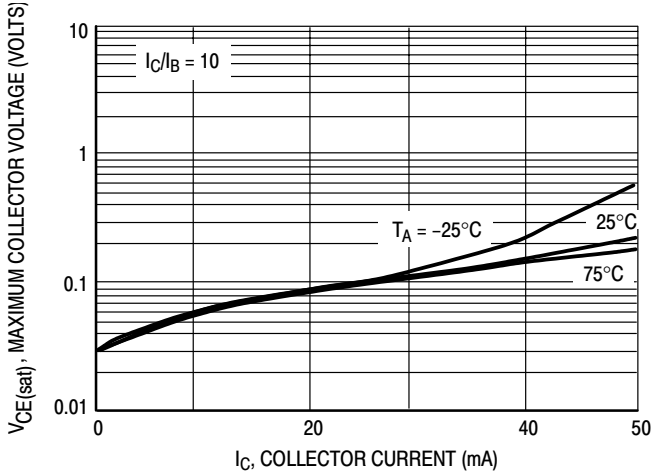


Figure 22.  $V_{CE(sat)}$  versus  $I_C$

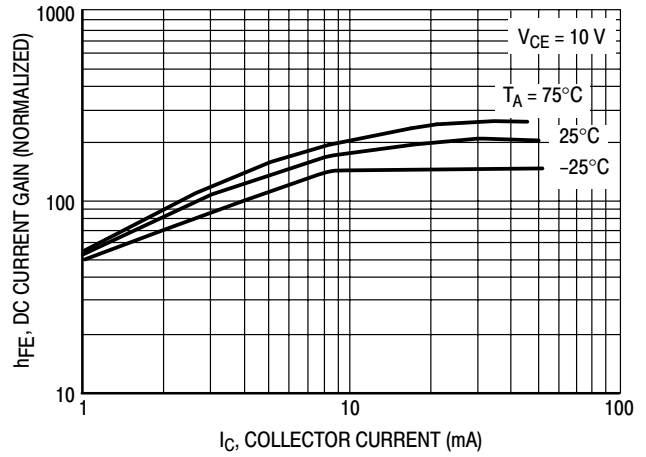


Figure 23. DC Current Gain

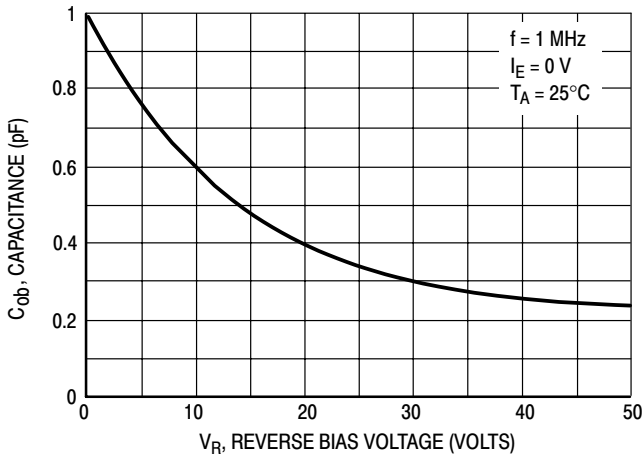


Figure 24. Output Capacitance

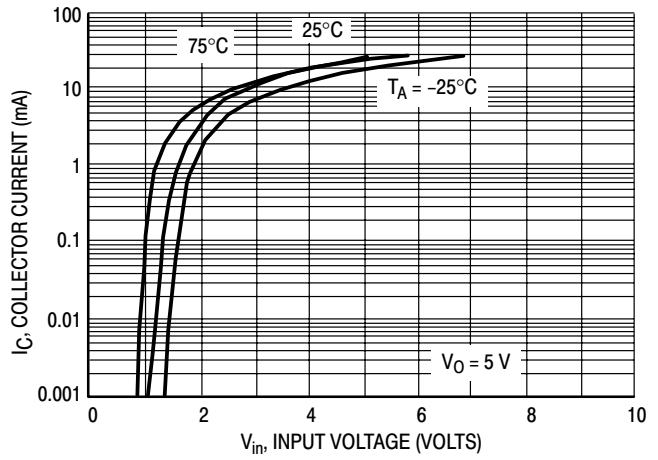


Figure 25. Output Current versus Input Voltage

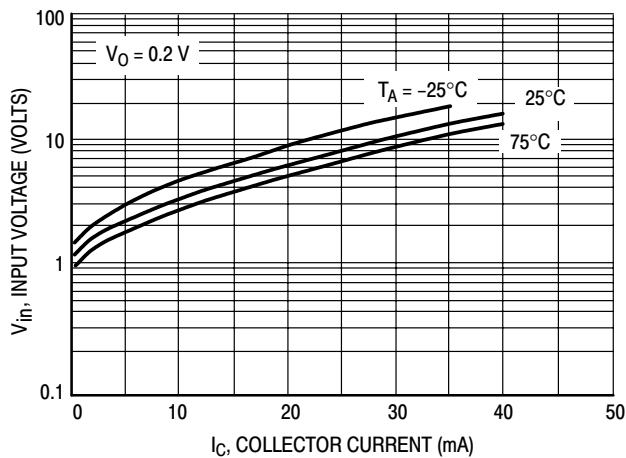


Figure 26. Input Voltage versus Output Current

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## TYPICAL ELECTRICAL CHARACTERISTICS – NSBC144EPDXV6T1 PNP TRANSISTOR

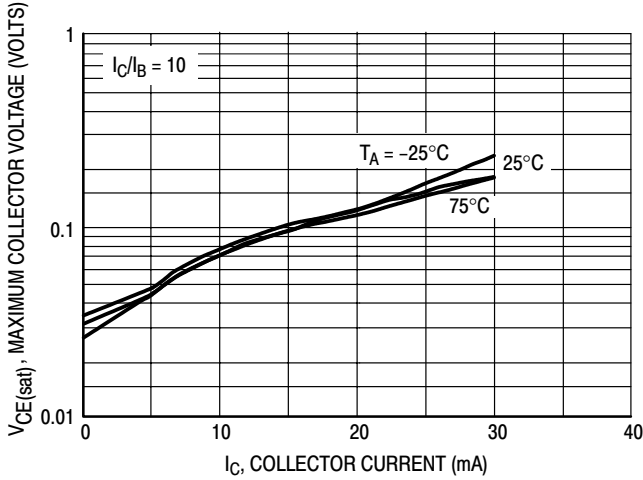


Figure 27.  $V_{CE(sat)}$  versus  $I_C$

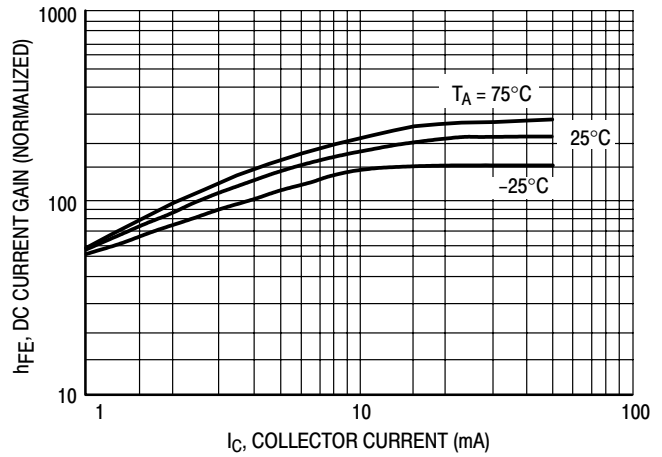


Figure 28. DC Current Gain

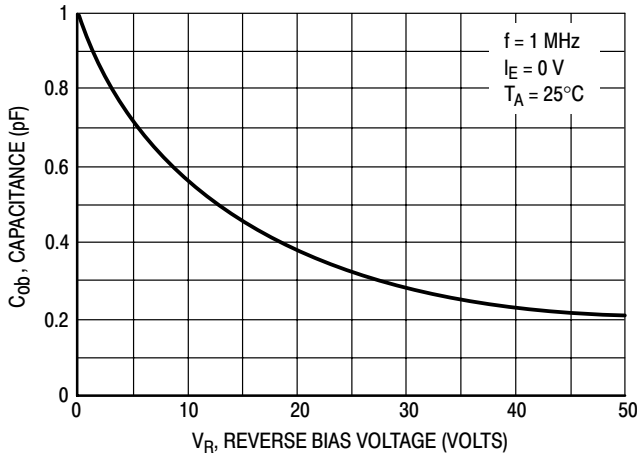


Figure 29. Output Capacitance

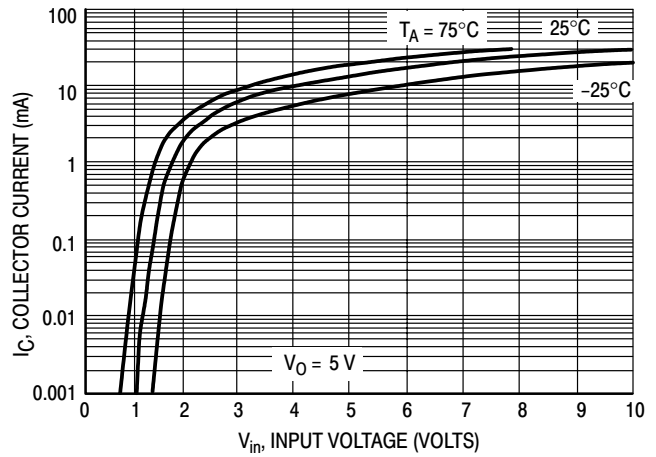


Figure 30. Output Current versus Input Voltage

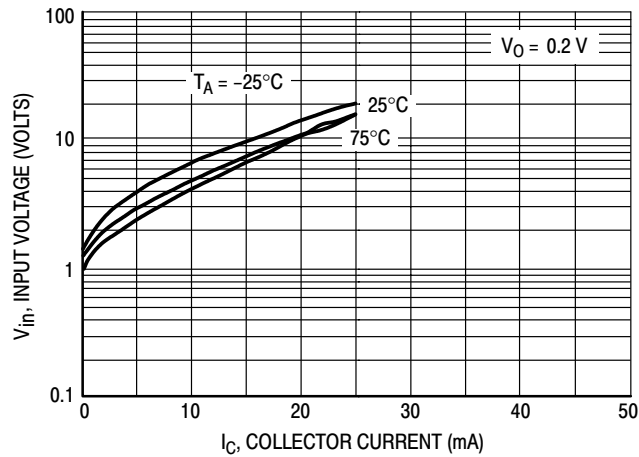


Figure 31. Input Voltage versus Output Current

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## TYPICAL ELECTRICAL CHARACTERISTICS – NSBC114YPDXV6T1 NPN TRANSISTOR

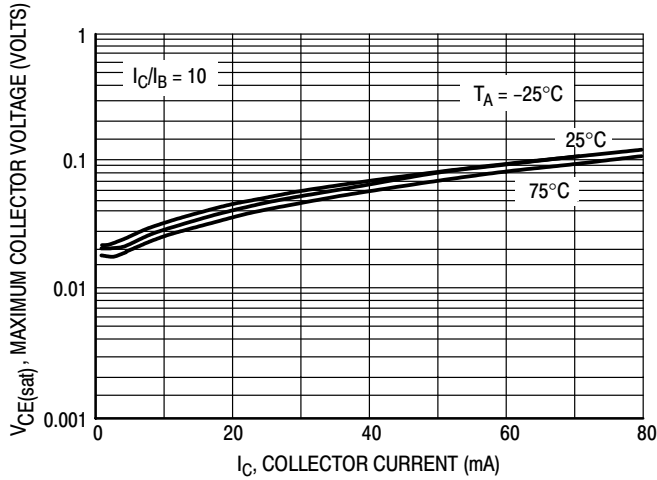


Figure 32.  $V_{CE(sat)}$  versus  $I_C$

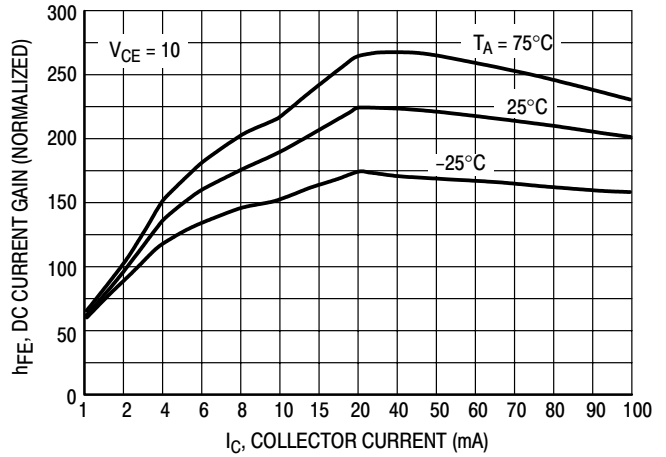


Figure 33. DC Current Gain

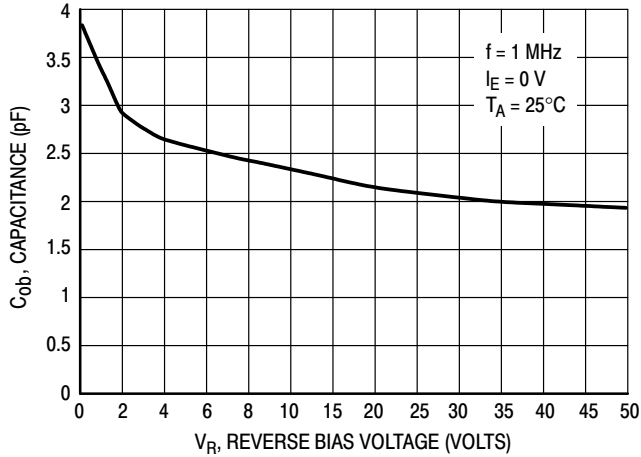


Figure 34. Output Capacitance

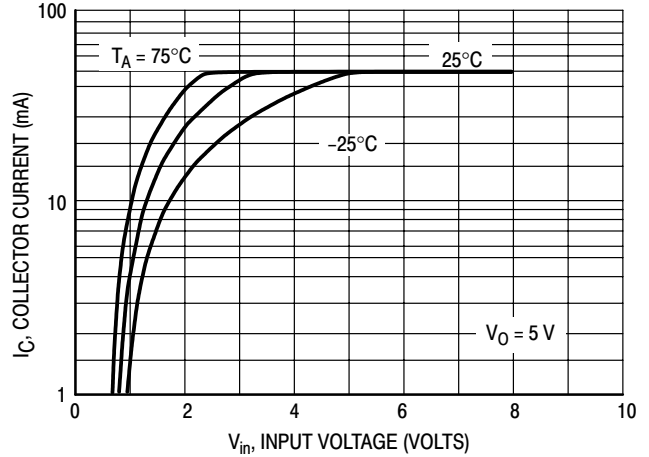


Figure 35. Output Current versus Input Voltage

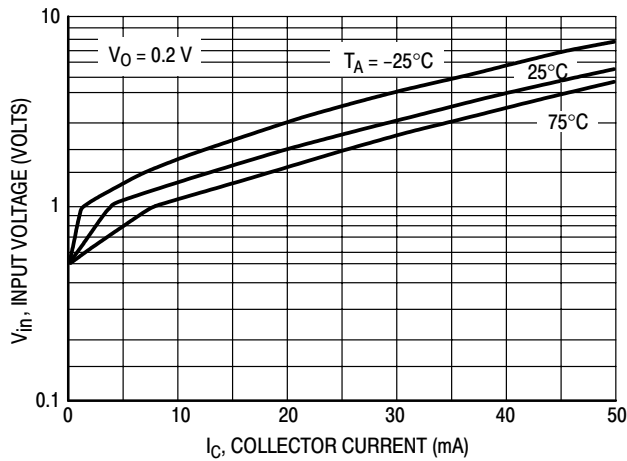


Figure 36. Input Voltage versus Output Current

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## TYPICAL ELECTRICAL CHARACTERISTICS – NSBC114YPDXV6T1 PNP TRANSISTOR

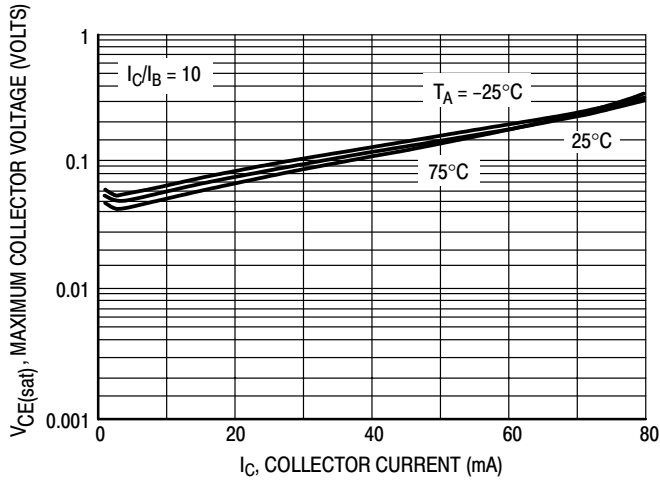


Figure 37.  $V_{CE(sat)}$  versus  $I_C$

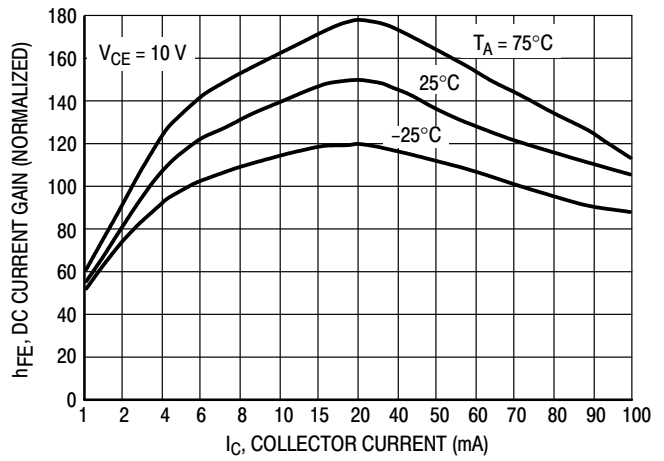


Figure 38. DC Current Gain

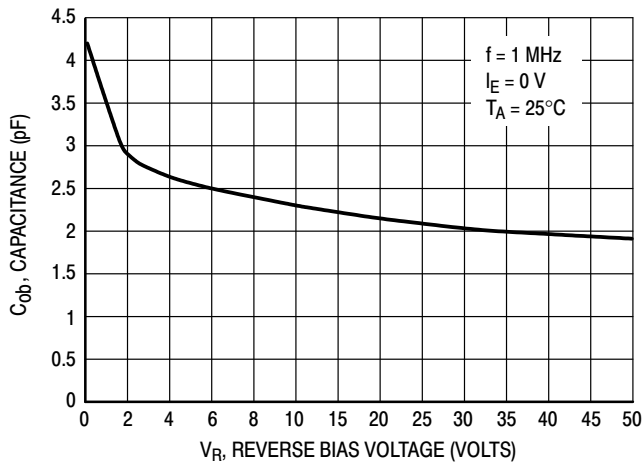


Figure 39. Output Capacitance

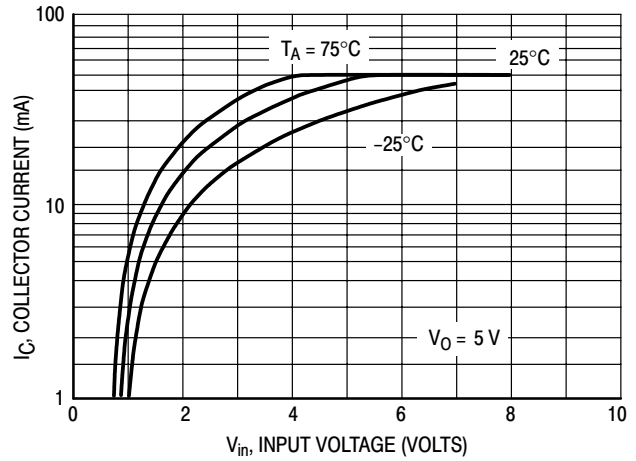


Figure 40. Output Current versus Input Voltage

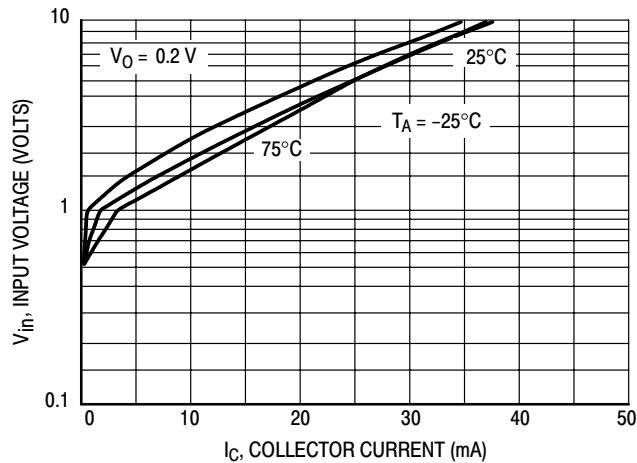


Figure 41. Input Voltage versus Output Current

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## TYPICAL ELECTRICAL CHARACTERISTICS – NSBC114TPDXV6T1

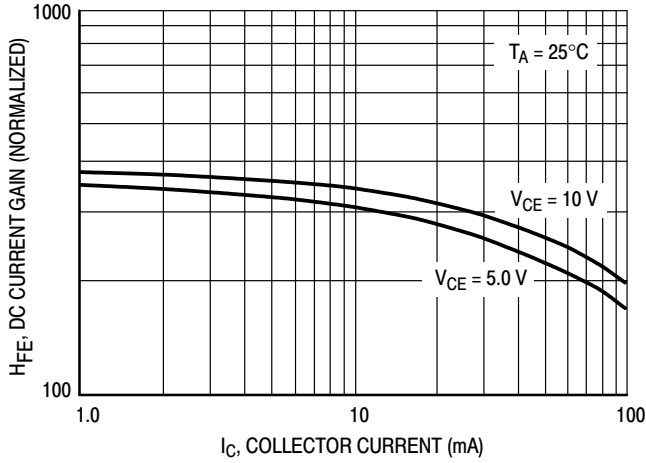


Figure 42. DC Current Gain – PNP

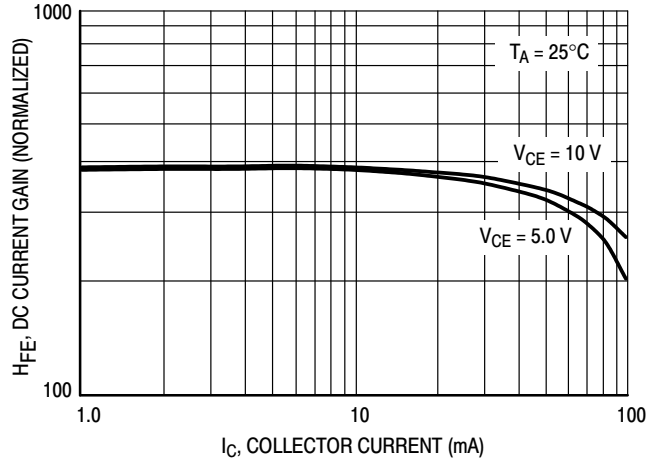


Figure 43. DC Current Gain – NPN

## TYPICAL ELECTRICAL CHARACTERISTICS – NSBC143TPDXV6T1

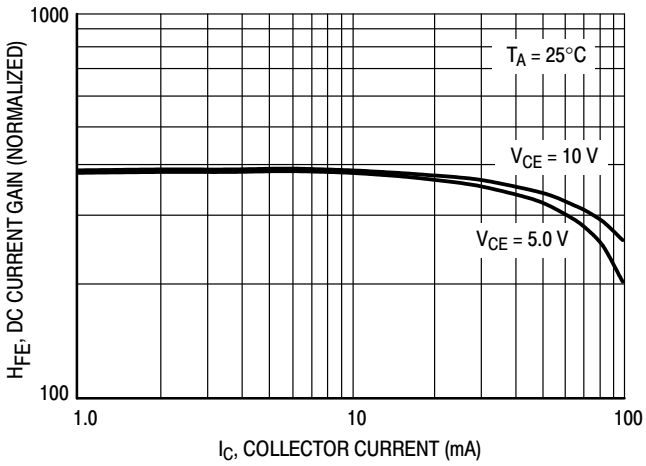


Figure 44. DC Current Gain – PNP


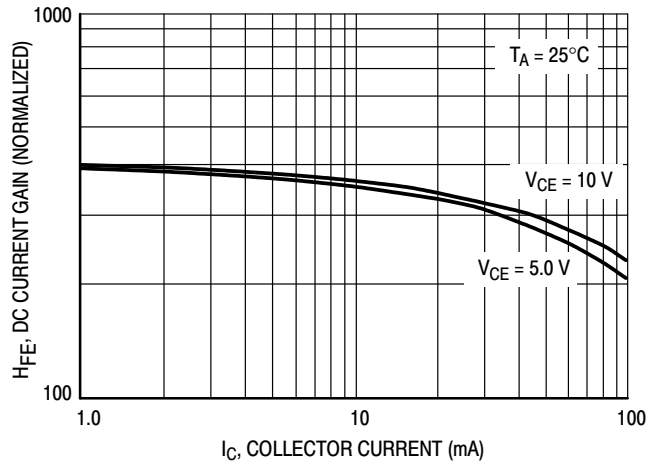


Figure 45. DC Current Gain – NPN

# NSBC114EPDXV6T1, NSBC114EPDXV6T5

## PACKAGE DIMENSIONS

SOT-563, 6 LEAD  
CASE 463A-01  
ISSUE O

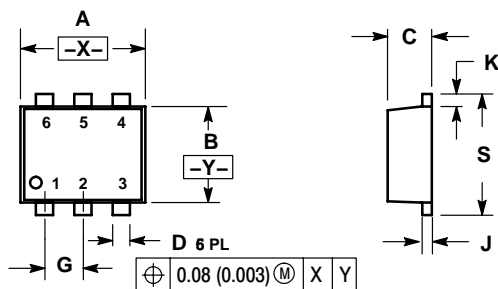


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETERS
  3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.50	1.70	0.059	0.067
B	1.10	1.30	0.043	0.051
C	0.50	0.60	0.020	0.024
D	0.17	0.27	0.007	0.011
G	0.50 BSC		0.020 BSC	
J	0.08	0.18	0.003	0.007
K	0.10	0.30	0.004	0.012
S	1.50	1.70	0.059	0.067

- |   |   |   |  |
|---|---|---|--|
| <p>STYLE 1:<br/>PIN 1. EMITTER 1<br/>2. BASE 1<br/>3. COLLECTOR 2<br/>4. EMITTER 2<br/>5. BASE 2<br/>6. COLLECTOR 1</p> | <p>STYLE 2:<br/>PIN 1. EMITTER 1<br/>2. EMITTER 2<br/>3. BASE 2<br/>4. COLLECTOR 2<br/>5. BASE 1<br/>6. COLLECTOR 1</p> | <p>STYLE 3:<br/>PIN 1. CATHODE 1<br/>2. CATHODE 1<br/>3. ANODE/ANODE 2<br/>4. CATHODE 2<br/>5. CATHODE 2<br/>6. ANODE/ANODE 1</p> | <p>STYLE 4:<br/>PIN 1. COLLECTOR<br/>2. COLLECTOR<br/>3. BASE<br/>4. EMITTER<br/>5. COLLECTOR<br/>6. COLLECTOR</p> |
|---|---|---|--|

### SOLDERING FOOTPRINT\*

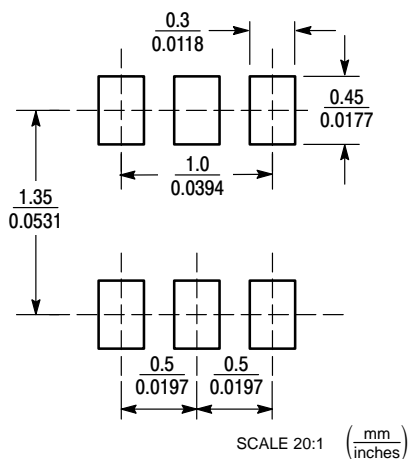

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**Japan:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850

**ON Semiconductor Website:** <http://onsemi.com>

**Order Literature:** <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.