

Dual Chip LED Lamp




Features

- Compact type
- $\bullet \ Radiation \ size \ 1.3mm \times 2.9mm$
- Radiation color (Red, Green)
- Surface mount lead configuration

Outline Dimensions

unit: mm

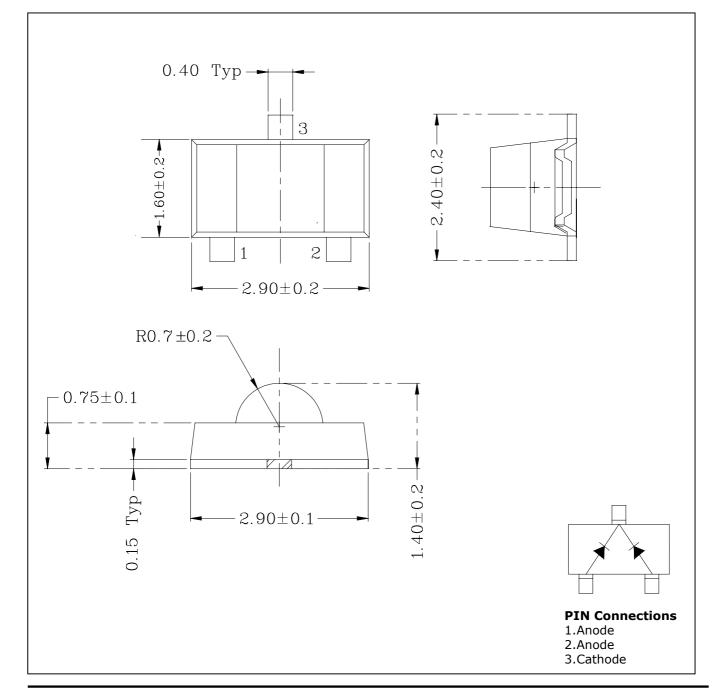

Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit		
Power Dissipation	P_D	55	mW		
Forward Current	I _F 30		mA		
*1Peak Forward Current	${ m I}_{\sf FP}$	50	mA		
Reverse Voltage	V_R	4	V		
Operating Temperature	T_{opr}	-25~85	$^{\circ}$ C		
Storage Temperature	T_{stg}	-30~100	$^{\circ}$		
*2Soldering Temperature	T_{sol}	240℃ for 5 seconds			

Electrical Characteristics

Characteristic	Symbol		Test Condition	Min.	Тур.	Max.	Unit
Forward Voltage	V _F	Red	I _F = 20mA	-	1.9	2.6	V
		Y-Green		-	2.1	2.8	
Luminous Intensity	I _V	Red	I _F = 20mA	-	30	-	mcd
		Y-Green		-	18	-	
Peak Wavelength	λ_{P}	Red	I _F = 20mA	-	660	-	nm
		Y-Green			570		
Spectrum Bandwidth	Δλ	Red	I _F = 20mA	-	35	-	nm
		Y-Green			30		
Reverse Current	I_R		$V_R=4V$	-	-	10	uA
* ³ Half angle	θ1/2		$I_F = 20mA$	-	±60	-	deg


^{*3.} θ 1/2 is the off-axis angle where the luminous intensity is 1/2 the peak intensity

KLD-3000-000 2

^{*1.}Duty ratio = 1/16, Pulse width = 0.1ms *2.Recommended soldering condition ⇒ Attached

Characteristic Diagrams

Fig. 1 I_F - V_F

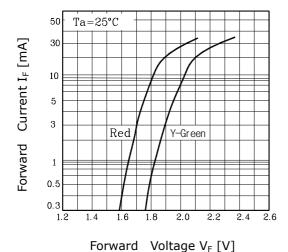

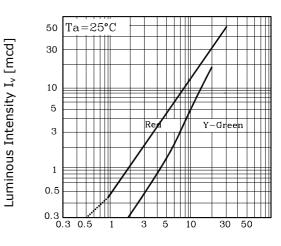


Fig. 2 I_V - I_F

Forward Current I_F [mA]

Fig. 3 I_F – Ta



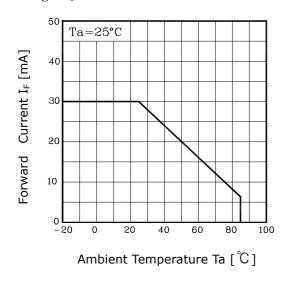


Fig.4 Spectrum Distribution

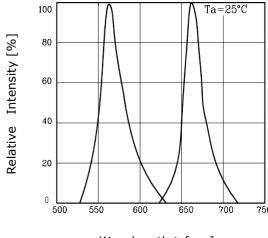

Wavelength λ [nm]

Fig. 5-1 Radiation Diagram

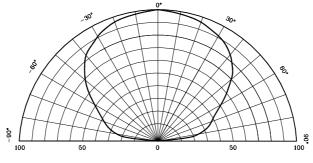

Relative Luminous Intensity Iv [%]

KLD-3000-000 3

These AUK products are intended for usage in general electronic equipments(Office and communication equipment, measuring equipment, domestic electrification, etc.).

Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.).

AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation with AUK.

KLD-3000-000 4