

Vishay Telefunken


# MOSMIC<sup>®</sup> for TV–Tuner Prestage with 12 V Supply Voltage

MOSMIC - MOS Monolithic Integrated Circuit

## Applications


Low noise gain controlled input stages in UHF-and VHF- tuner with 12 V supply voltage.


Electrostatic sensitive device. Observe precautions for handling.



#### Features

- Integrated gate protection diodes
- Low noise figure
- High gain
- Biasing network on chip






S849T Marking: 849 Plastic case (SOT 143) 1 = Source, 2 = Drain, 3 = Gate 2, 4 = Gate 1

## **Absolute Maximum Ratings**

 $T_{amb} = 25^{\circ}C$ , unless otherwise specified

- Improved cross modulation at gain reduction
- High AGC-range
- SMD package



S849TR Marking: 49R Plastic case (SOT 143R) 1 = Source, 2 = Drain, 3 = Gate 2, 4 = Gate 1

Parameter	Test Conditions	Symbol	Value	Unit
Drain - source voltage		V <sub>DS</sub>	16	V
Drain current		I <sub>D</sub>	30	mA
Gate 1/Gate 2 - source peak current		±IG1/G2SM	10	mA
Gate 1/Gate 2 - source voltage		±V <sub>G1/G2SM</sub>	7.5	V
Total power dissipation	T <sub>amb</sub> ≤ 60 °C	P <sub>tot</sub>	200	mW
Channel temperature		T <sub>Ch</sub>	150	°C
Storage temperature range		T <sub>stq</sub>	-55 to +150	°C

## **Maximum Thermal Resistance**

 $T_{amb} = 25^{\circ}C$ , unless otherwise specified

Parameter	Test Conditions	Symbol	Value	Unit
Channel ambient	on glass fibre printed board (25 x 20 x 1.5) mm^3 plated with 35 $\mu$ m Cu	R <sub>thChA</sub>	450	K/W

## Vishay Telefunken



## **Electrical DC Characteristics**

 $T_{amb} = 25^{\circ}C$ , unless otherwise specified

Parameter	Test Conditions	Symbol	Min	Тур	Max	Unit
Gate 1 - source breakdown voltage	$\pm I_{G1S}$ = 10 mA, $V_{G2S}$ = $V_{DS}$ = 0	±V <sub>(BR)G1SS</sub>	8		12	V
Gate 2 - source breakdown voltage	$\pm I_{G2S}$ = 10 mA, $V_{G1S}$ = $V_{DS}$ = 0	±V <sub>(BR)G2SS</sub>	8		12	V
Gate 1 - source	$+V_{G1S} = 6 V, V_{G2S} = V_{DS} = 0$	+I <sub>G1SS</sub>			60	μA
leakage current	$-V_{G1S} = 6 V, V_{G2S} = V_{DS} = 0$	-I <sub>G1SS</sub>			120	μA
Gate 2 - source leakage current	$\pm V_{G2S} = 6 V, V_{G1S} = V_{DS} = 0$	±I <sub>G2SS</sub>			20	nA
Drain current	V <sub>DS</sub> = 12 V, V <sub>G1S</sub> = 0, V <sub>G2S</sub> = 6 V	I <sub>DSS</sub>	50		500	μA
Self-biased operating current	$V_{DS} = 12 \text{ V}, V_{G1S} = \text{nc}, V_{G2S} = 6 \text{ V}$	I <sub>DSP</sub>	8	12	16	mA
Gate 2 - source cut-off voltage	$V_{DS}$ = 12 V, $V_{G1S}$ = nc, $I_{D}$ = 200 µA	V <sub>G2S(OFF)</sub>		1.0		V

## **Electrical AC Characteristics**

 $V_{DS}$  = 12 V,  $V_{G2S}$  = 6 V, f = 1 MHz ,  $T_{amb}$  = 25°C, unless otherwise specified

Parameter	Test Conditions	Symbol	Min	Тур	Max	Unit
Forward transadmittance		y <sub>21s</sub>	20	24	28	mS
Gate 1 input capacitance		C <sub>issg1</sub>		2.1	2.5	pF
Feedback capacitance		C <sub>rss</sub>		20		fF
Output capacitance		C <sub>oss</sub>		0.9		pF
Power gain	$G_S = 2 \text{ mS}, G_L = 0.5 \text{ mS}, f = 200 \text{ MHz}$	G <sub>ps</sub>		26		dB
	G <sub>S</sub> = 3,3 mS, G <sub>L</sub> = 1 mS, f = 800 MHz	G <sub>ps</sub>	16.5	20		dB
AGC range	$V_{DS} = 12 \text{ V}, V_{G2S} = 1 \text{ to } 6 \text{ V}, f = 800 \text{ MHz}$	$\Delta G_{ps}$	40			dB
Noise figure	G <sub>S</sub> = 2 mS, G <sub>L</sub> = 0.5 mS, f = 200 MHz	F		1		dB
	G <sub>S</sub> = 3,3 mS, G <sub>L</sub> = 1 mS, f = 800 MHz	F		1.3		dB

## Caution for Gate 1 switch-off mode:

No external DC-voltage on Gate 1 in active mode! Switch-off at Gate 1 with  $V_{G1S} < 0.7$  V is feasible. Using open collector switching transistor (inside of PLL), insert 10 k $\Omega$  collector resistor.



#### **Common Source S–Parameters**


 $V_{DS}$  = 12 V ,  $V_{G2S}$  = 6 V ,  $~Z_{0}$  = 50  $\Omega,~T_{amb}$  = 25  $^{\circ}C,$  unless otherwise specified


	S11		S21		S1	2	S2	22
f/MHz	LOG MAG	ANG	LOG MAG	ANG	LOG MAG	ANG	LOG MAG	ANG
	dB	deg	dB	deg	dB	deg	dB	deg
50	-0.01	-3.9	7.46	175.0	-61.64	87.7	-0.17	-1.7
100	-0.04	-7.6	7.37	169.3	-55.58	85.2	-0.20	-3.3
150	-0.11	-11.5	7.30	163.4	-52.05	82.0	-0.22	-5.0
200	-0.16	-15.1	7.21	157.8	-49.78	79.5	-0.25	-6.6
250	-0.28	–19.1	7.09	151.8	-48.15	76.4	-0.26	-8.4
300	-0.39	-22.4	6.98	146.8	-46.79	75.0	-0.31	-9.8
350	-0.51	-26.0	6.79	141.2	-45.92	72.6	-0.34	-11.3
400	-0.65	-29.4	6.66	136.0	-45.15	70.9	-0.38	-12.8
450	-0.79	-32.7	6.47	131.0	-44.66	69.5	-0.44	-14.3
500	-0.95	-35.8	6.29	125.8	-44.28	67.8	-0.48	-15.9
550	-1.09	-39.0	6.13	121.0	-44.13	67.3	-0.53	-17.4
600	-1.26	-42.2	5.91	116.0	-44.04	68.0	-0.59	-18.8
650	-1.41	-45.1	5.76	111.8	-43.84	68.6	-0.63	-20.2
700	-1.56	-48.3	5.55	106.9	-43.97	69.2	-0.65	-21.6
750	-1.71	-50.9	5.40	102.6	-44.18	70.4	-0.72	-23.1
800	-1.89	-53.6	5.22	98.0	-44.54	73.2	-0.76	-24.4
850	-2.02	-56.7	5.08	93.8	-44.81	77.0	-0.80	-25.9
900	-2.15	-59.5	4.89	89.4	-45.03	83.4	-0.85	-27.6
950	-2.28	-62.3	4.75	85.2	-44.87	90.8	-0.90	-29.0
1000	-2.45	-65.1	4.55	80.9	-44.59	95.7	-0.96	-30.2
1050	-2.59	-67.8	4.38	76.2	-44.59	100.2	-1.07	-31.6
1100	-2.75	-70.5	4.20	72.2	-44.54	108.4	-1.11	-33.0
1150	-2.81	-73.3	4.14	67.9	-44.05	116.7	-1.13	-34.7
1200	-2.96	-75.7	4.02	64.3	-43.33	125.5	-1.15	-36.2
1250	-3.07	-78.7	3.90	60.1	-42.41	133.5	-1.18	-37.6
1300	-3.18	-81.4	3.73	55.6	-41.13	139.3	-1.26	-39.1


# S849T/S849TR



## **Vishay Telefunken**













Figure 2. Drain Current vs. Drain Source Voltage





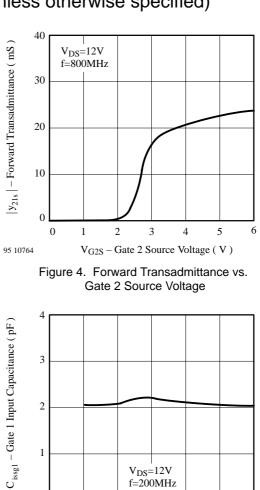

2


1

0

95 10762

0

1



V<sub>DS</sub>=12V f=200MHz

3

Figure 5. Gate 1 Input Capacitance vs. Gate 2 Source Voltage

V<sub>G2S</sub> – Gate 2 Source Voltage (V)

4

5

6

2

Figure 6. Output Capacitance vs. Drain Source Voltage



## S849T/S849TR Vishay Telefunken




Figure 7. Transducer Gain vs. Gate 2 Source Voltage




Figure 8. Cross Modulation vs. Gate 2 Source Voltage

## S849T/S849TR


## Vishay Telefunken



 $V_{DS}$  = 8 V,  $I_{D}$  = 10 mA,  $V_{G2S}$  = 4 V ,  $Z_{0}$  = 50  $\Omega$ 



S<sub>12</sub>












Figure 10. Forward transmission coefficient





S<sub>22</sub>






Figure 12. Output reflection coefficient



S849T/S849TR Vishay Telefunken

## **Dimensions of S849T in mm**







96 12240



technical drawings according to DIN specifications

## **Dimensions of S849TR in mm**





96 12239



technical drawings according to DIN specifications

# S849T/S849TR

## Vishay Telefunken



## **Ozone Depleting Substances Policy Statement**

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.

2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

- 1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
- 2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
- 3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay-Telefunken products for any unintended or unauthorized application, the buyer shall indemnify Vishay-Telefunken against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

> Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423