

HD74LVC00

Quad. 2-input NAND Gates

REJ03D0341-0300Z (Previous ADE-205-060B (Z)) Rev.3.00 Jul. 22, 2004

Description

The HD74LVC00 has four 2-input NAND gates in a 14 pin package. Low voltage and high-speed operation is suitable at the battery drive product (note type personal computer) and low power consumption extends the life of a battery for long time operation.

Features

- $V_{CC} = 2.0 \text{ V to } 5.5 \text{ V}$
- All inputs V_{IH} (Max.) = 5.5 V (@ V_{CC} = 0 V to 5.5 V)
- Typical V_{OL} ground bounce < 0.8 V (@ V_{CC} = 3.3 V, Ta = 25°C)
- Typical V_{OH} undershoot > 2.0 V (@ V_{CC} = 3.3 V, Ta = 25°C)
- High output current ± 24 mA (@V_{CC} = 3.0 V to 5.5 V)
- Ordering Information

Part Name	Package Type	Package Code	Package Abbreviation	Taping Abbreviation (Quantity)		
HD74LVC00FPEL	SOP-14 pin (JEITA)	FP-14DAV	FP	EL (2,000 pcs/reel)		
HD74LVC00TELL	TSSOP-14 pin	TTP-14DV	T	ELL (2,000 pcs/reel)		


Note: Please consult the sales office for the above package availability.

Function Table

	Inpute		
Α	В	Output Y	
L		Н	
L	Н	Н	
Н	L	Н	
Н	Н	L	

H: High level
L: Low level

Pin Arrangement

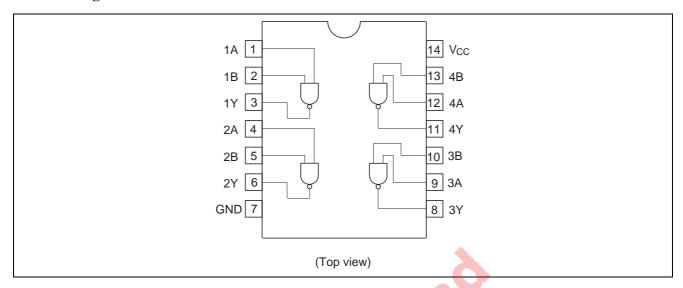

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit Conditions
Supply voltage	Vcc	-0.5 to 6.0	V
Input diode current	I _{IK}	-50	$V_1 = -0.5 \text{ V}$
Input voltage	VI	-0.5 to 6.0	V
Output diode current	I _{OK}	-50	mA $V_0 = -0.5 \text{ V}$
		50	mA $V_O = V_{CC} + 0.5 V$
Output voltage	Vo	-0.5 to V _{CC} +0.5	V
Output current	I _o	±50	mA
V _{CC} , GND current / pin	I _{CC} or I _{GND}	100	mA
Storage temperature	Tstg	-65 to +150	°C

Note: The absolute maximum ratings are values, which must not individually be exceeded, and furthermore, no two of which may be realized at the same time.

Recommended Operating Conditions

Item	Symbol	Ratings	Unit	Conditions
Supply voltage	Vcc	1.5 to 5.5	V	Data retention
		2.0 to 5.5		At operation
Input / Output voltage	Vı	0 to 5.5	V	A, B
	Vo	0 to V _{CC}		Y
Operating temperature	Та	-40 to 85	°C	
Output current	lон	–12	mA	$V_{CC} = 2.7 \text{ V}$
		-24* ²		$V_{CC} = 3.0 \text{ V to } 5.5 \text{ V}$
	I _{OL}	12		$V_{CC} = 2.7 \text{ V}$
		24* ²		V _{CC} = 3.0 V to 5.5 V
Input rise / fall time *1	t _r , t _f	10	ns/V	

Notes: 1. This item guarantees maximum limit when one input switches.

Waveform: Refer to test circuit of switching characteristics.

2. Duty cycle \leq 50%.

Electrical Characteristics


 $Ta = -40 \text{ to } 85^{\circ}\text{C}$

Item	Symbol	V _{CC} (V)	Min	Max	Unit	Test Conditions	
Input voltage	V _{IH}	2.7 to 3.6	2.0	_	V		
		4.5 to 5.5	V _{CC} ×0.7	_	_		
	V_{IL}	2.7 to 3.6	_	0.8			
		4.5 to 5.5	_	V _{CC} ×0.3			
Output voltage	V_{OH}	2.7 to 5.5	V _{CC} -0.2	_	V	$I_{OH} = -100 \mu A$	
		2.7	2.2	_		$I_{OH} = -12 \text{ mA}$	
		3.0	2.4	_			
		3.0	2.0	_		$I_{OH} = -24 \text{ mA}$	
		4.5	3.8	_	_		
	V _{OL}	2.7 to 5.5	_	0.2	V	I _{OL} = 100 μA	
		2.7	_	0.4	_	I _{OL} = 12 mA	
		3.0	_	0.55	_	I _{OL} = 24 mA	
		4.5	_	0.55	_		
Input current	I _{IN}	0 to 5.5	_	±5.0	μΑ	V _{IN} = 5.5 V or GND	
Quiescent supply current	I _{CC}	5.5	_	20	μA	V _{IN} = V _{CC} or GND	
	ΔI_{CC}	3.0 to 3.6	_	500	μA	V_{IN} = one input at (V_{CC} -0.6)V, other inputs at V_{CC} or GND	


Switching Characteristics

			$Ta = -40 \text{ to } 85^{\circ}C$				From	То
Item	Symbol	V _{CC} (V)	Min	Тур	Max	Unit	(Input)	(Output)
Propagation delay time	t _{PLH}	2.7	(+)	4.5	7.0	ns	A or B	Υ
	t _{PHL}	3.3±0.3	1.5	3.5	6.0			
		5.0±0.5		3.0	5.5			
Input capacitance	C _{IN}	2.7	-	3.0	_	pF		
Output capacitance	Co	2.7	Y	15.0	_	pF		


Test Circuit

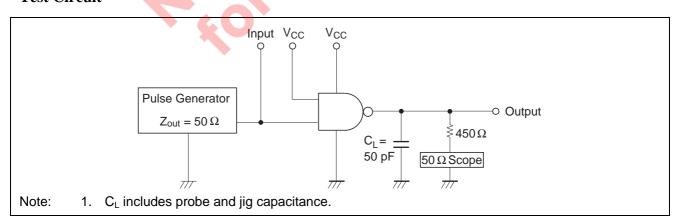


Waveforms

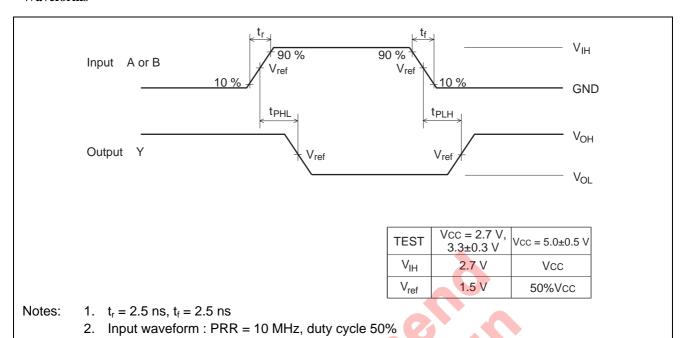

Package Dimensions

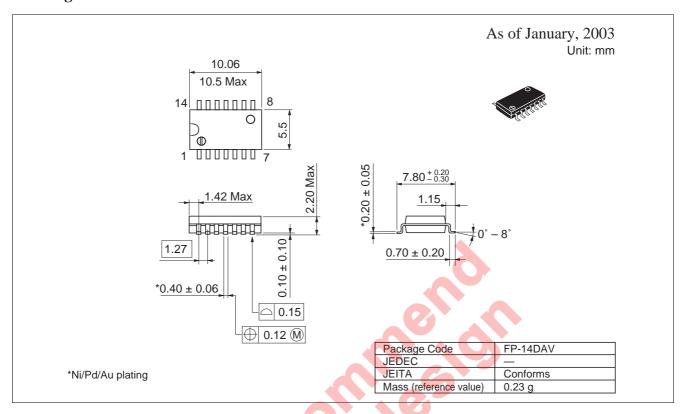

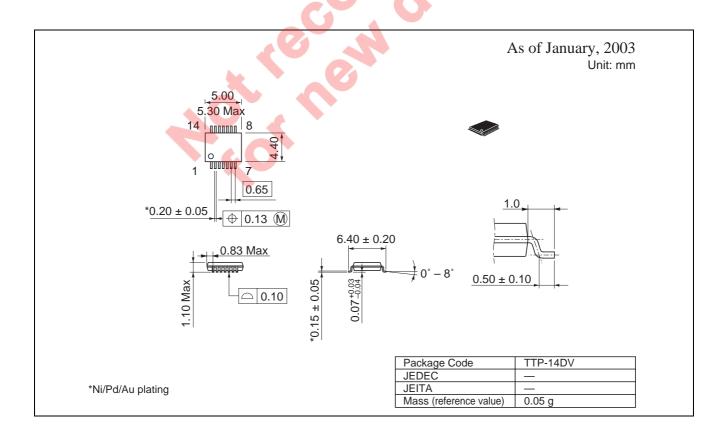

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.

Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

- Notes regarding these materials

 1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.

 2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.

- therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.

 The information described here may contain technical inaccuracies or typographical errors.
 Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
 Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (http://www.renesas.com).

 4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

 5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- use.

 6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.

 7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.

 Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.

 8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



RENESAS SALES OFFICES

http://www.renesas.com

Renesas Technology America, Inc. 450 Holger Way, San Jose, CA 95134-1368, U.S.A Tel: <1> (408) 382-7500 Fax: <1> (408) 382-7501

Renesas Technology Europe Limited.

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, United Kingdom Tel: <44> (1628) 585 100, Fax: <44> (1628) 585 900

Renesas Technology Europe GmbH Dornacher Str. 3, D-85622 Feldkirchen, Germany Tel: <49> (89) 380 70 0, Fax: <49> (89) 929 30 11

Renesas Technology Hong Kong Ltd.
7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Hong Kong Tel: <852> 2265-6688, Fax: <852> 2375-6836

Renesas Technology Taiwan Co., Ltd. FL 10, #99, Fu-Hsing N. Rd., Taipei, Taiwan Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology (Shanghai) Co., Ltd. 26/F., Ruijin Building, No.205 Maoming Road (S), Shanghai 200020, China Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

Renesas Technology Singapore Pte. Ltd.
1, Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632 Tel: <65> 6213-0200, Fax: <65> 6278-8001