






### Features

- 4.5mm SMD
- Fast tripping resettable circuit protection
- Surface mount packaging for automated assembly
- Reduced component size and resistance
- Agency recognition:   

### Applications

- High Density Circuit Board Applications:
- Hard disk drives
  - PC motherboards
  - PC peripherals
  - Point-of-sale (POS) equipment
  - PCMCIA cards

## MF-MSMD Series - PTC Resettable Fuses

### Electrical Characteristics

Model	V max. Volts	I max. Amps	I <sub>hold</sub>	I <sub>trip</sub>	Resistance		Max. Time To Trip		Tripped Power Dissipation
			Amperes at 23°C		Ohms at 23°C		Amperes at 23°C	Seconds at 23°C	Watts at 23°C
			Hold	Trip	R <sub>Min.</sub>	R <sub>1Max.</sub>			
MF-MSMD010	30.0	10	0.10	0.20	0.70	15.00	0.5	1.5	0.8
MF-MSMD014	60.0	10	0.14	0.34	0.70	6.00	1.5	0.15	0.8
MF-MSMD020	30.0	10	0.20	0.40	0.40	5.00	6.0	0.06	0.8
MF-MSMD050	15.0	40	0.50	1.00	0.15	1.00	8.0	0.15	0.8
MF-MSMD075	13.2	40	0.75	1.50	0.11	0.45	8.0	0.20	0.8
MF-MSMD110	6.0	40	1.10	2.20	0.04	0.21	8.0	0.30	0.8
MF-MSMD125	6.0	40	1.25	2.50	0.035	0.14	8.0	0.4	0.8
MF-MSMD150	6.0	40	1.50	3.00	0.03	0.110	8.0	0.5	0.8
MF-MSMD160	10.0	40	1.60	2.80	0.066	0.099	8.0	2.0	0.5
MF-MSMD200	6.0	40	2.0	4.0	0.022	0.060	8.0	3.0	1.5
MF-MSMD260	6.0	40	2.60	5.2	0.015	0.043	8.0	10.0	1.5

### Environmental Characteristics

Operating/Storage Temperature .....-40°C to +85°C  
 Maximum Device Surface Temperature  
   in Tripped State .....125°C  
 Passive Aging .....+85°C, 1000 hours .....±5% typical resistance change  
 Humidity Aging .....+85°C, 85% R.H. 1000 hours .....±5% typical resistance change  
 Thermal Shock .....+85°C to -40°C, 20 times .....±10% typical resistance change  
 Solvent Resistance .....MIL-STD-202, Method 215 .....No change  
 Vibration .....MIL-STD-883C, Method 2007.1, .....No change  
   Condition A  
 Stocking Recommendations .....Six months with prepackaged desiccant

### Test Procedures And Requirements For Model MF-MSMD Series

Test	Test Conditions	Accept/Reject Criteria
Visual/Mech.	Verify dimensions and materials	Per MF physical description
Resistance	In still air @ 23°C	R <sub>min</sub> ≤ R ≤ R <sub>max</sub>
Time to Trip	At specified current, V <sub>max</sub> , 23°C	T ≤ max. time to trip (seconds)
Hold Current	30 min. at I <sub>hold</sub>	No trip
Trip Cycle Life	V <sub>max</sub> , I <sub>max</sub> , 100 cycles	No arcing or burning
Trip Endurance	V <sub>max</sub> , 48 hours	No arcing or burning

UL File Number .....E 174545S  
 CSA File Number .....CA 110338  
 TÜV File Number .....R2057213

## Additional Features

- Patents pending

# MF-MSMD Series - PTC Resettable Fuses

**BOURNS®**


### Product Dimensions

Model	A		B		C		D
	Min.	Max.	Min.	Max.	Min.	Max.	Min.
MF-MSMD010	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.56}{(0.022)}$	$\frac{0.81}{(0.032)}$	$\frac{0.30}{(0.012)}$
MF-MSMD014	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.56}{(0.022)}$	$\frac{0.81}{(0.032)}$	$\frac{0.30}{(0.012)}$
MF-MSMD020	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.56}{(0.022)}$	$\frac{0.81}{(0.032)}$	$\frac{0.30}{(0.012)}$
MF-MSMD050	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.38}{(0.015)}$	$\frac{0.62}{(0.024)}$	$\frac{0.30}{(0.012)}$
MF-MSMD075	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.38}{(0.015)}$	$\frac{0.62}{(0.024)}$	$\frac{0.30}{(0.012)}$
MF-MSMD110	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.38}{(0.015)}$	$\frac{0.62}{(0.024)}$	$\frac{0.30}{(0.012)}$
MF-MSMD125	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.28}{(0.011)}$	$\frac{0.48}{(0.019)}$	$\frac{0.25}{(0.010)}$
MF-MSMD150	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.28}{(0.011)}$	$\frac{0.48}{(0.019)}$	$\frac{0.25}{(0.010)}$
MF-MSMD160	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{2.80}{(0.110)}$	$\frac{3.41}{(0.134)}$	$\frac{0.38}{(0.015)}$	$\frac{0.62}{(0.024)}$	$\frac{0.30}{(0.012)}$
MF-MSMD200	$\frac{4.60}{(0.181)}$	$\frac{4.75}{(0.187)}$	$\frac{3.20}{(0.126)}$	$\frac{3.60}{(0.142)}$	$\frac{1.50}{(0.059)}$	$\frac{2.00}{(0.079)}$	$\frac{1.4}{(0.055)}$
MF-MSMD260	$\frac{4.60}{(0.181)}$	$\frac{4.75}{(0.187)}$	$\frac{3.20}{(0.126)}$	$\frac{3.60}{(0.142)}$	$\frac{1.50}{(0.059)}$	$\frac{2.00}{(0.079)}$	$\frac{1.4}{(0.055)}$


Packaging: 1500 pcs. per reel.

DIMENSIONS =  $\frac{\text{MM}}{\text{(INCHES)}}$

Top and Bottom View Side View




Recommended Pad Layout

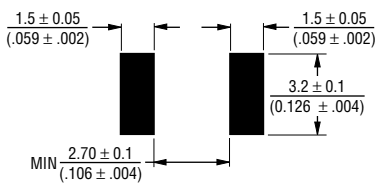

Terminal material: solder-plated copper  
 Termination pad solderability: Meets EIA  
 Specification RS-186-9E, ANSI/J-STD-002  
 Category 3.

### Solder Reflow Recommendations

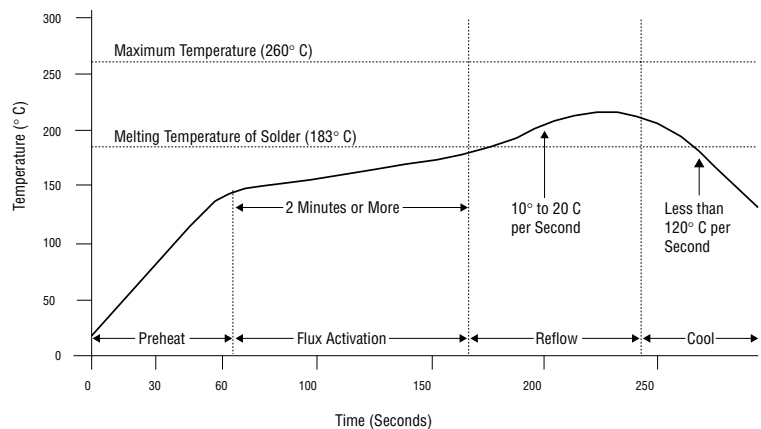


**Note:**

- MF-MSMD models can be wave soldered and reworked.
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

# MF-MSMD Series - PTC Resettable Fuses



## Typical Time to Trip at 23°C

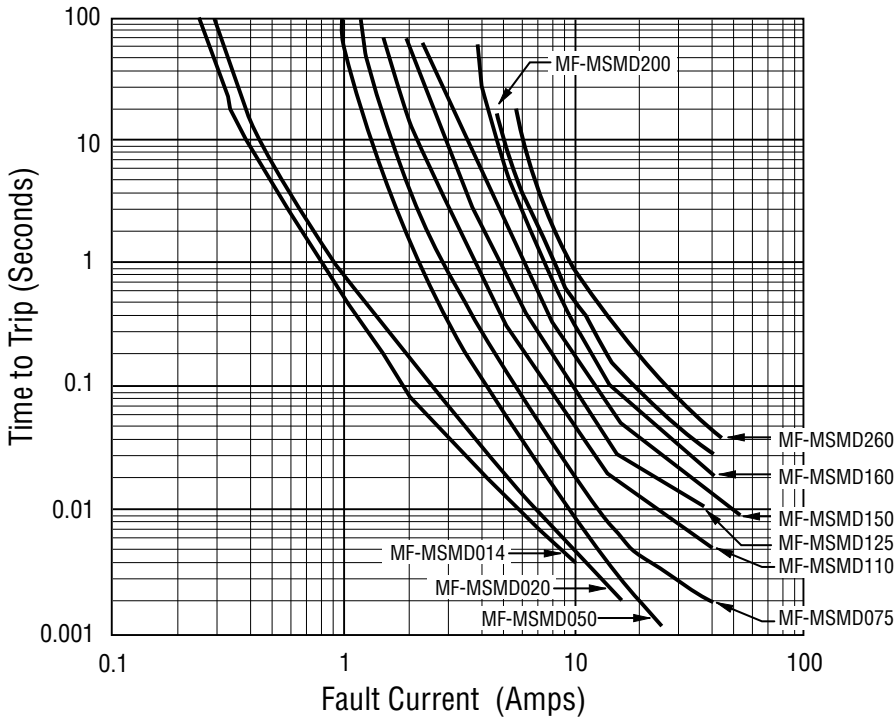

## How to Order

**MF - MSMD 020 - 2**

Multifuse® Product Designator \_\_\_\_\_


Series \_\_\_\_\_  
MSMD = 4.5mm Surface Mount Component

Hold Current,  $I_{hold}$  \_\_\_\_\_  
010-260 (0.10 Amps - 2.60 Amps)

Packaging \_\_\_\_\_  
Packaged per EIA 481-1  
-2 = Tape and Reel

## Typical Part Marking

Represents total content. Layout may vary.

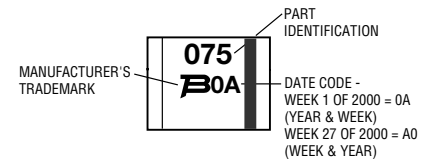

## Thermal Derating Chart - $I_{hold}$ / $I_{trip}$ (Amps)

Model	Ambient Operating Temperature								
	-40°C	-20°C	0°C	23°C	40°C	50°C	60°C	70°C	85°C
MF-MSMD010	0.16 /	0.14 /	0.12 /	0.11 /	0.08 /	0.07 /	0.06 /	0.05 /	0.03 /
MF-MSMD014	0.23 / 0.52	0.19 / 0.45	0.17 / 0.40	0.14 / 0.34	0.12 / 0.29	0.10 / 0.25	0.09 / 0.23	0.08 / 0.21	0.06 / 0.16
MF-MSMD020	0.29 / 0.58	0.26 / 0.52	0.23 / 0.46	0.20 / 0.40	0.17 / 0.34	0.15 / 0.30	0.14 / 0.28	0.12 / 0.24	0.10 / 0.20
MF-MSMD050	0.77 / 1.54	0.68 / 1.36	0.59 / 1.18	0.50 / 1.00	0.44 / 0.88	0.40 / 0.80	0.37 / 0.74	0.33 / 0.66	0.29 / 0.58
MF-MSMD075	1.15 / 2.30	1.01 / 2.02	0.88 / 1.76	0.75 / 1.50	0.65 / 1.30	0.60 / 1.20	0.55 / 1.10	0.49 / 0.98	0.43 / 0.86
MF-MSMD110	1.59 / 3.18	1.43 / 2.86	1.26 / 2.52	1.10 / 2.20	0.95 / 1.90	0.87 / 1.74	0.80 / 1.60	0.71 / 1.42	0.60 / 1.20
MF-MSMD125	1.80 / 3.61	1.63 / 3.25	1.43 / 2.86	1.25 / 2.50	1.08 / 2.16	0.99 / 1.98	0.91 / 1.82	0.81 / 1.62	0.68 / 1.36
MF-MSMD150	2.17 / 4.34	1.95 / 3.90	1.72 / 3.44	1.50 / 3.00	1.30 / 2.59	1.18 / 2.37	1.09 / 2.18	0.97 / 1.94	0.82 / 1.64
MF-MSMD160	2.30 / 5.00	2.20 / 4.40	1.90 / 3.80	1.60 / 2.80	1.45 / 2.90	1.30 / 2.60	1.15 / 2.30	1.03 / 2.06	0.91 / 1.82
MF-MSMD200	3.08 / 6.14	2.71 / 5.39	2.35 / 4.62	2.00 / 4.01	1.80 / 1.61	1.60 / 3.19	1.50 / 2.98	1.07 / 2.12	0.80 / 1.58
MF-MSMD260	4.00 / 7.98	3.52 / 7.01	3.06 / 6.09	2.60 / 5.15	2.34 / 4.64	2.08 / 4.13	1.95 / 3.87	1.39 / 2.74	1.04 / 2.05

# MF-MSMD, MF-USMD & MF-ESMD Series Tape and Reel Specs



Tape Dimension Identifiers	MF-MSMD Series per EIA-481-1	MF-USMD Series per EIA 481-1	MF-ESMD Series per EIA 481-1
W	$\frac{12 \pm 0.3}{(.472 \pm .012)}$	$\frac{8 \pm 0.3}{(.040 \pm .012)}$	$\frac{8 \pm 0.3}{(.040 \pm .012)}$
P <sub>0</sub>	$\frac{4.0 \pm 0.10}{(.157 \pm .004)}$	$\frac{4.0 \pm 0.10}{(.157 \pm .004)}$	$\frac{4.0 \pm 0.10}{(.157 \pm .004)}$
P <sub>1</sub>	$\frac{8.0 \pm 0.10}{(.315 \pm .004)}$	$\frac{4.0 \pm 0.10}{(.157 \pm .004)}$	$\frac{4.0 \pm 0.10}{(.157 \pm .004)}$
P <sub>2</sub>	$\frac{2.0 \pm 0.05}{(.079 \pm .039)}$	$\frac{2.0 \pm 0.05}{(.079 \pm .039)}$	$\frac{2.0 \pm 0.05}{(.079 \pm .039)}$
A <sub>0</sub>	$\frac{3.5 \pm 0.23}{(.134 \pm .009)}$	$\frac{2.8 \pm 0.1}{(.110 \pm .004)}$	$\frac{2.8 \pm 0.1}{(.110 \pm .004)}$
B <sub>0</sub>	$\frac{5.1 \pm 0.15}{(.201 \pm .006)}$	$\frac{3.5 \pm 0.1}{(.138 \pm .004)}$	$\frac{3.5 \pm 0.1}{(.138 \pm .004)}$
B <sub>1</sub> max.	$\frac{5.9}{(.232)}$	$\frac{4.35}{(.171)}$	$\frac{4.35}{(.171)}$
D <sub>0</sub>	$\frac{1.5 + 0.1/-0}{(.059 + .004/-0)}$	$\frac{1.5 + 0.1/-0}{(.059 + .004/-0)}$	$\frac{1.5 + 0.1/-0}{(.059 + .004/-0)}$
F	$\frac{5.5 \pm 0.05}{(2.165 \pm .002)}$	$\frac{3.5 \pm 0.05}{(.138 \pm .002)}$	$\frac{3.5 \pm 0.05}{(.138 \pm .002)}$
E <sub>1</sub>	$\frac{1.75 \pm 0.10}{(.069 \pm .004)}$	$\frac{1.75 \pm 0.10}{(.069 \pm .004)}$	$\frac{1.75 \pm 0.10}{(.069 \pm .004)}$
E <sub>2</sub> min.	$\frac{10.25}{(.404)}$	$\frac{6.25}{(.246)}$	$\frac{6.25}{(.246)}$
T max.	$\frac{0.6}{(.024)}$	$\frac{0.6}{(.024)}$	$\frac{0.6}{(.024)}$
T <sub>1</sub> max.	$\frac{0.1}{(.004)}$	$\frac{0.1}{(.004)}$	$\frac{0.1}{(.004)}$
K <sub>0</sub>	$\frac{0.9 \pm 0.15}{(.035 \pm .006)}$	$\frac{1.1 \pm 0.05}{(.043 \pm .002)}$	$\frac{0.8 \pm 0.1}{(.031 \pm .004)}$
Leader min.	$\frac{390}{(15.35)}$	$\frac{390}{(15.35)}$	$\frac{390}{(15.35)}$
Trailer min.	$\frac{160}{(6.30)}$	$\frac{160}{(6.30)}$	$\frac{160}{(6.30)}$
<b>Reel Dimension Identifiers</b>			
A max.	$\frac{185}{(7.283)}$	$\frac{185}{(7.283)}$	$\frac{185}{(7.283)}$
N min.	$\frac{50}{(1.97)}$	$\frac{50}{(1.97)}$	$\frac{50}{(1.97)}$
W <sub>1</sub>	$\frac{12.4 + 2.0/-0}{(.488 + .075/-0)}$	$\frac{8.4 + 1.5/-0}{(.331 + .059/-0)}$	$\frac{8.4 + 1.5/-0}{(.331 + .059/-0)}$
W <sub>2</sub> max.	$\frac{18.4}{(.724)}$	$\frac{14.4}{(.567)}$	$\frac{14.4}{(.567)}$

DIMENSIONS =  $\frac{\text{MM}}{\text{(INCHES)}}$

