
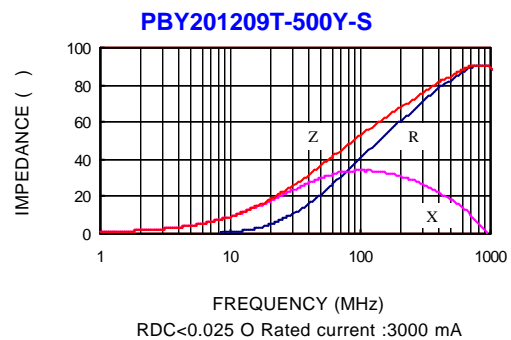
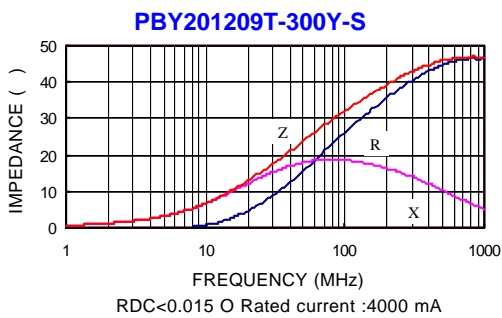
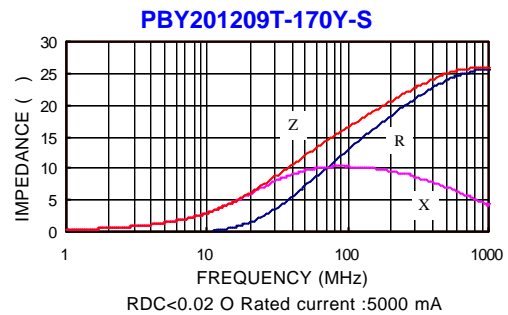


SMD Multilayer Ferrite Chip Beads – PB201209 Series

Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance (±25%)	D.C. Resistance () max.	Rated current (mA) max.
PBY201209T-110Y-S	100	11	0.01	6000
PBY201209T-170Y-S	100	17	0.02	5000
PBY201209T-300Y-S	100	30	0.015	5000
PBY201209T-500Y-S	100	50	0.025	3000
PBY201209T-600Y-S	100	60	0.03	3000
PBY201209T-800Y-S	100	80	0.04	3000
PBY201209T-121Y-S	100	120	0.04	3000
PBY201209T-201Y-S	100	200	0.05	2500
PBY201209T-301Y-S	100	300	0.08	2000
PBY201209T-601Y-S	100	600	0.10	2000
PBY201209T-102Y-S	100	1000	0.12	1500


Test Instruments : HP4291A Impedance / Material Analyzer

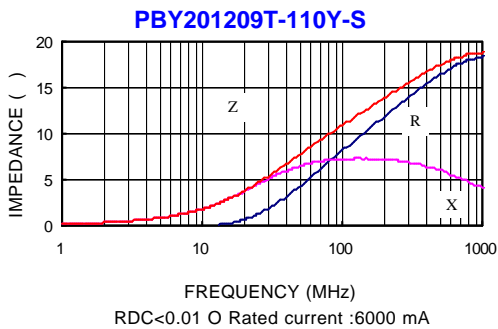


SMD Multilayer Ferrite Chip Beads - PB201209 Series

Test Instruments : HP4291A Impedance / Material Analyzer


PBY201209T-600Y-S

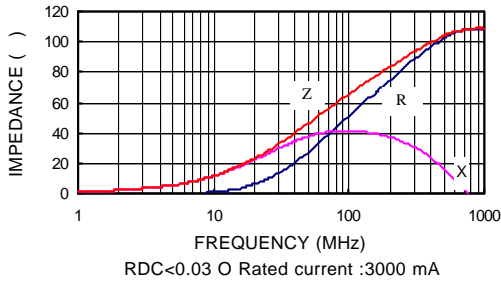


PBY201209T-800Y-S

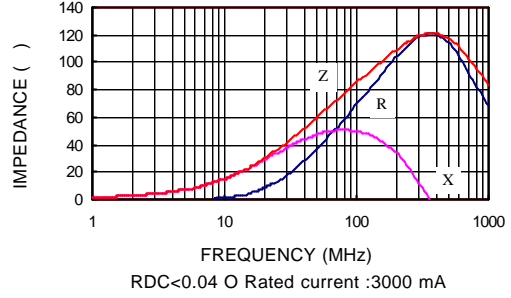


PBY201209T-121Y-S

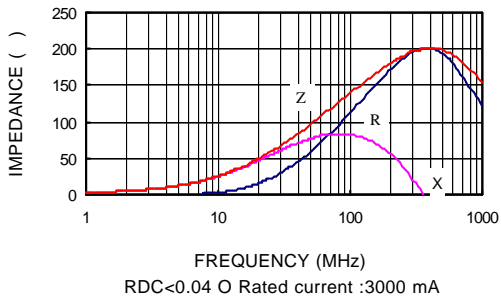


PBY201209T-201Y-S

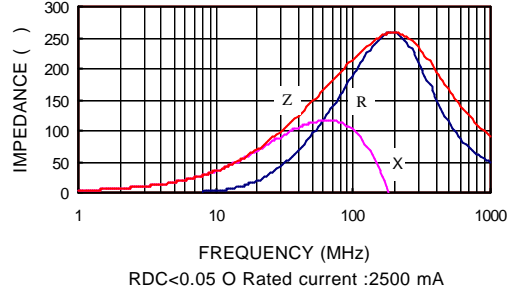

PBY201209T-301Y-S

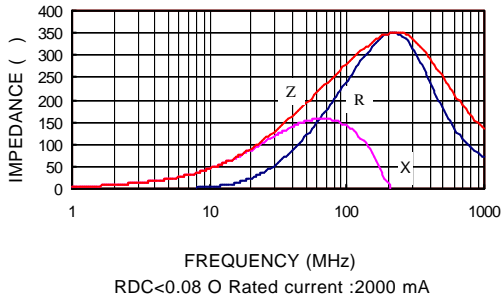

PBY201209T-601Y-S

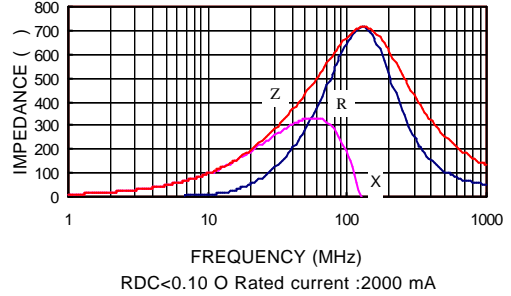

PBY201209T-102Y-S

