

SANYO	No.5035	2SC5228
		NPN Epitaxial Planar Silicon Transistor VHF to UHF Wide-Band Low-Noise Amp Applications

Features

- Low noise : NF = 1.0dB typ (f = 1GHz).
- High gain : | S21e |² = 13.5dB typ (f = 1GHz).
- High cutoff frequency : f_T = 7GHz typ.

Absolute Maximum Ratings at Ta = 25°C

			unit
Collector-to-Base Voltage	V _{CB0}	20	V
Collector-to-Emitter Voltage	V _{CEO}	10	V
Emitter-to-Base Voltage	V _{EBO}	2	V
Collector Current	I _C	70	mA
Collector Dissipation	P _C	200	mW
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55 to +150	°C

Electrical Characteristics at Ta = 25°C

			min	typ	max	unit
Collector Cutoff Current	I _{CBO}	V _{CB} = 10V, I _E = 0			1.0	μA
Emitter Cutoff Current	I _{EBO}	V _{EB} = 1V, I _C = 0			10	μA
DC Current Gain	h _{FE}	V _{CE} = 5V, I _C = 20mA	60※		270※	
Gain-Bandwidth Product	f _T	V _{CE} = 5V, I _C = 20mA	5	7		GHz
Output Capacitance	C _{ob}	V _{CB} = 10V, f = 1MHz		0.75	1.2	pF
Reverse Transfer Capacitance	C _{re}	V _{CB} = 10V, f = 1MHz		0.4		pF
Forward Transfer Gain	S21e ² (1)	V _{CE} = 5V, I _C = 20mA, f = 1GHz	11	13.5		dB
	S21e ² (2)	V _{CE} = 2V, I _C = 3mA, f = 1GHz		9		dB
Noise Figure	NF	V _{CE} = 5V, I _C = 7mA, f = 1GHz	1.0		1.8	dB


※ : The 2SC5228 is classified by 20mA h_{FE} as follows :

60	3	120	90	4	180	135	5	270
----	---	-----	----	---	-----	-----	---	-----

Marking : LN
h_{FE} rank : 3, 4, 5








Package Dimensions 2110A

(unit: mm)

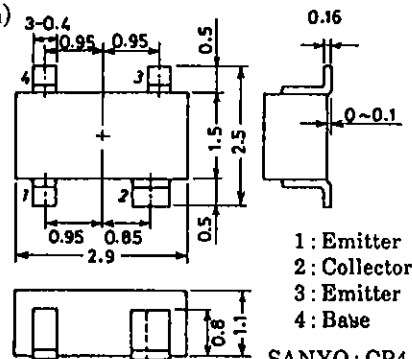

- 1: Emitter
- 2: Collector
- 3: Emitter
- 4: Base



SANYO: CP4

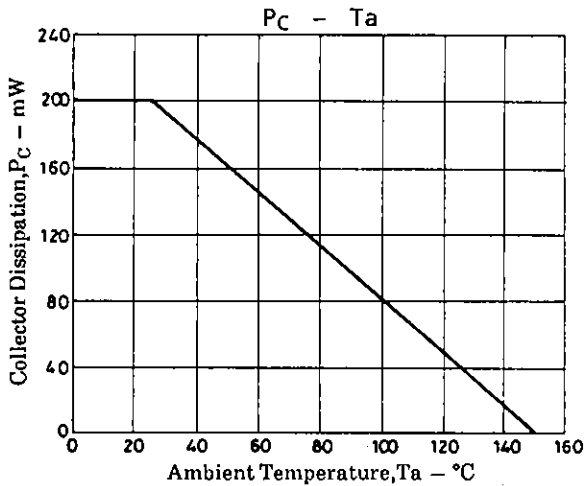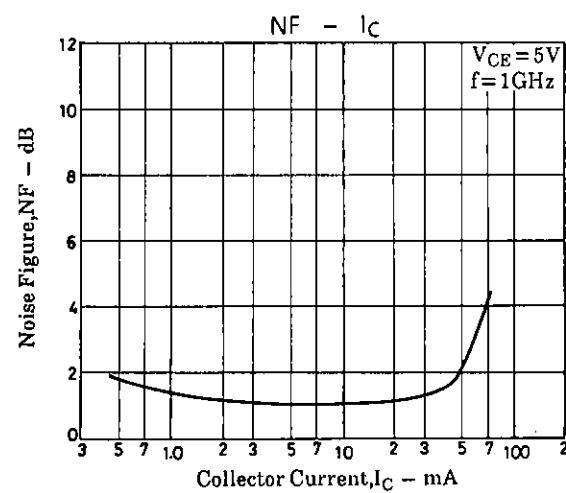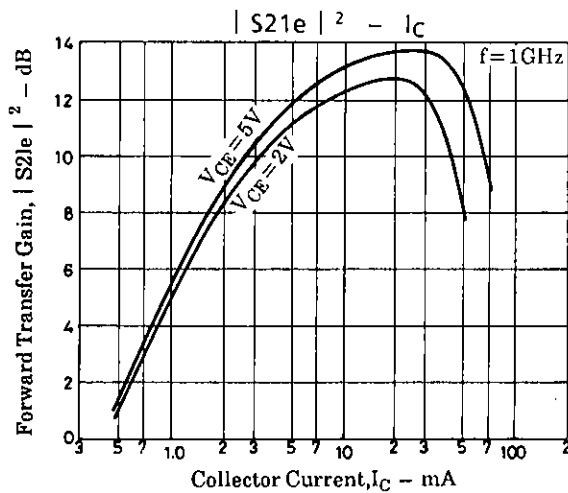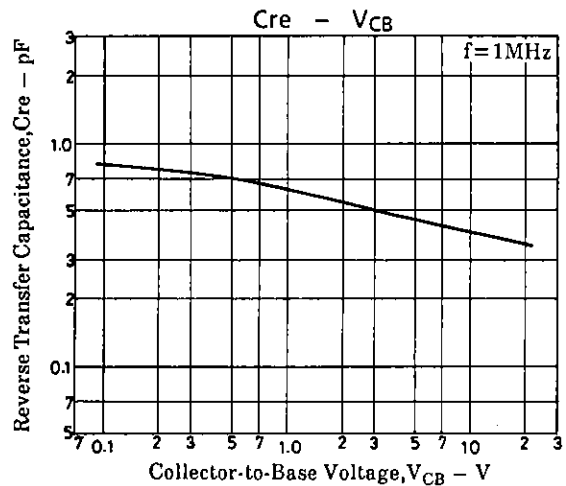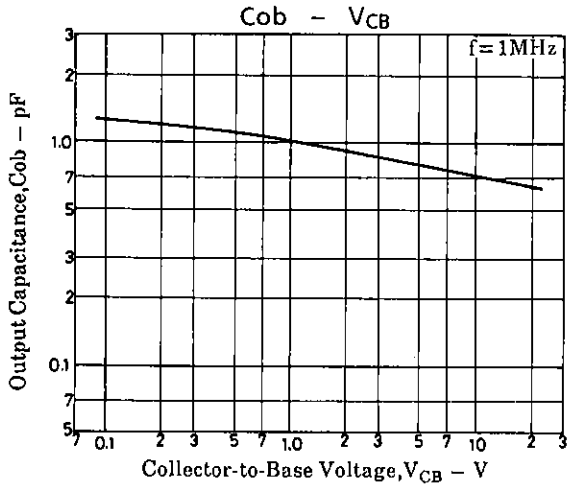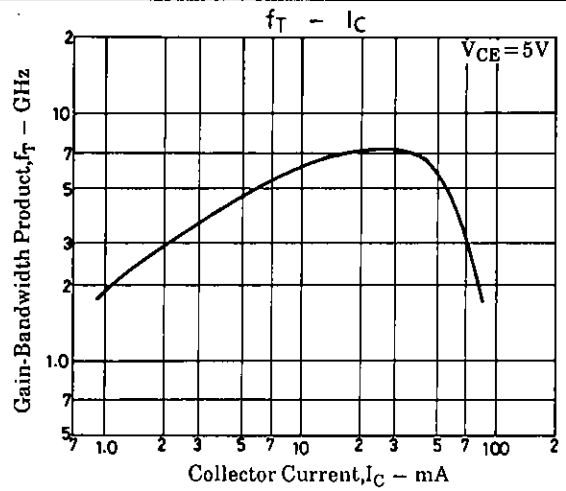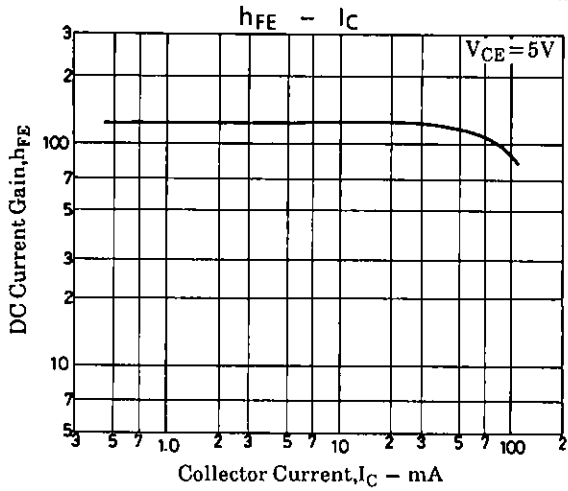

S Parameter



f = 100MHz, 200 to 2000MHz (200MHz step)

f = 100MHz, 200 to 2000MHz (200MHz step)

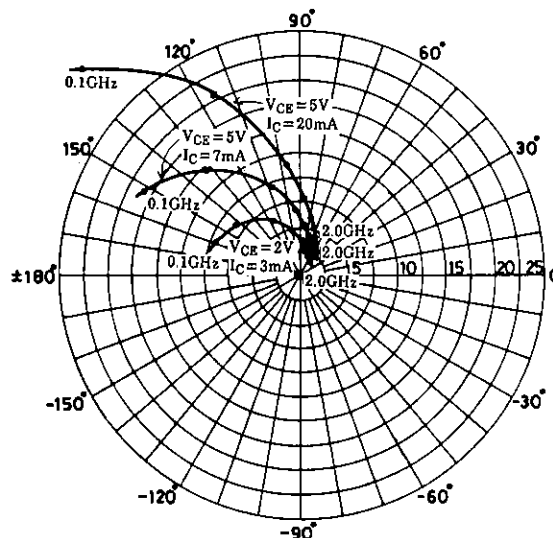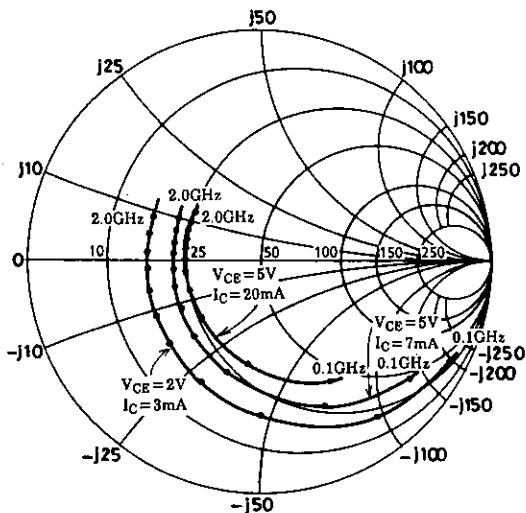

f = 100MHz, 200 to 2000MHz (200MHz step)

f = 100MHz, 200 to 2000MHz (200MHz step)

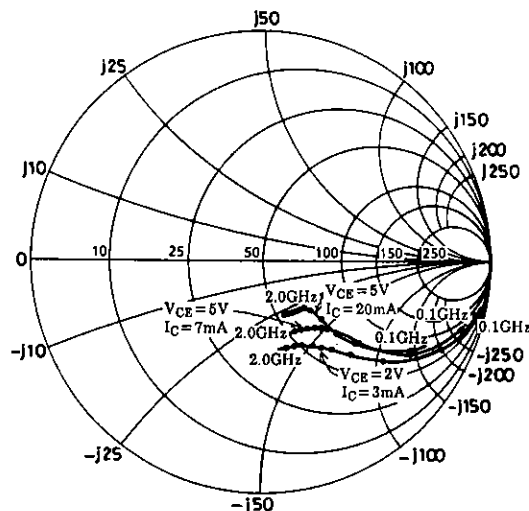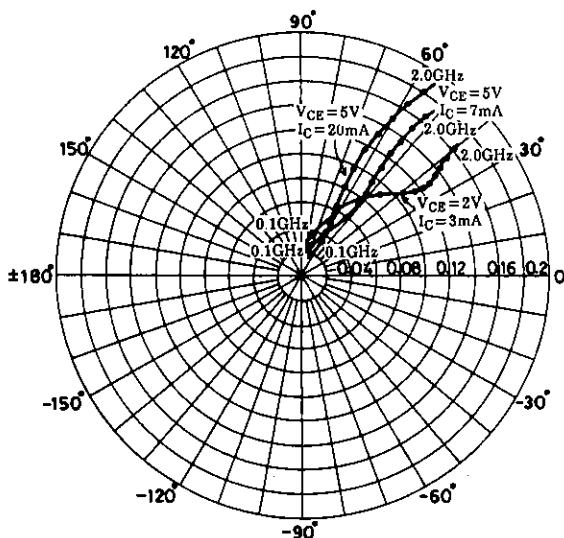

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

2SC5228

S Parameter (Common emitter)

$V_{CE} = 5V, I_C = 7mA, Z_0 = 50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.803	-38.2	18.190	151.5	0.026	71.3	0.903	-19.3
200	0.677	-68.5	14.614	131.5	0.042	59.3	0.753	-31.5
400	0.508	-132.7	9.484	108.0	0.061	51.6	0.549	-41.1
600	0.442	-132.7	6.775	95.1	0.073	50.9	0.453	-44.2
800	0.407	-151.0	5.256	85.7	0.086	52.1	0.406	-46.4
1000	0.393	-163.5	4.285	78.5	0.098	53.1	0.383	-48.9
1200	0.386	-174.5	3.628	71.7	0.111	53.8	0.373	-51.1
1400	0.386	175.3	3.161	65.9	0.125	53.8	0.363	-53.6
1600	0.387	168.3	2.786	60.2	0.138	53.5	0.354	-56.9
1800	0.393	161.0	2.517	55.1	0.152	53.2	0.348	-60.7
2000	0.402	152.6	2.298	49.9	0.166	52.1	0.345	-64.5

$V_{CE} = 5V, I_C = 20mA, Z_0 = 50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.592	-62.6	30.943	136.5	0.021	66.1	0.753	-31.2
200	0.458	-99.8	20.624	115.6	0.032	59.8	0.541	-41.9
400	0.367	-138.1	11.531	97.4	0.048	61.6	0.370	-45.0
600	0.347	-157.3	7.914	88.0	0.064	63.6	0.310	-45.5
800	0.338	-171.6	6.036	80.6	0.081	64.2	0.287	-47.0
1000	0.336	179.1	4.880	74.7	0.098	64.0	0.276	-49.7
1200	0.337	170.8	4.113	69.2	0.116	63.2	0.274	-52.4
1400	0.342	163.6	3.558	64.0	0.133	61.7	0.268	-55.4
1600	0.346	157.4	3.134	59.2	0.150	60.0	0.262	-59.3
1800	0.352	151.2	2.824	54.4	0.167	58.5	0.259	-63.8
2000	0.361	145.6	2.575	50.0	0.182	56.4	0.256	-68.2

$V_{CE} = 2V, I_C = 3mA, Z_0 = 50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.903	-28.0	9.365	159.3	0.035	74.8	0.955	-14.2
200	0.826	-53.3	8.413	142.1	0.063	62.2	0.865	-25.8
400	0.672	-92.0	6.269	117.1	0.094	46.7	0.684	-39.7
600	0.589	-118.0	4.748	101.4	0.109	39.7	0.565	-46.8
800	0.540	-138.3	3.789	89.6	0.117	36.7	0.497	-51.4
1000	0.515	-152.4	3.141	80.8	0.125	36.0	0.459	-55.1
1200	0.503	-165.2	2.687	72.2	0.131	36.2	0.438	-58.3
1400	0.495	-175.9	2.353	65.4	0.138	37.2	0.420	-61.6
1600	0.494	175.2	2.088	58.8	0.146	38.0	0.411	-65.0
1800	0.495	166.4	1.894	52.7	0.155	39.4	0.400	-69.2
2000	0.502	158.1	1.732	46.9	0.163	40.0	0.396	-73.6