


# RS2A THRU RS2K

## SURFACE MOUNT FAST SWITCHING RECTIFIER

Reverse Voltage - 50 to 800 Volts

Forward Current - 1.5 Amperes

### DO-214AA MODIFIED J-BEND

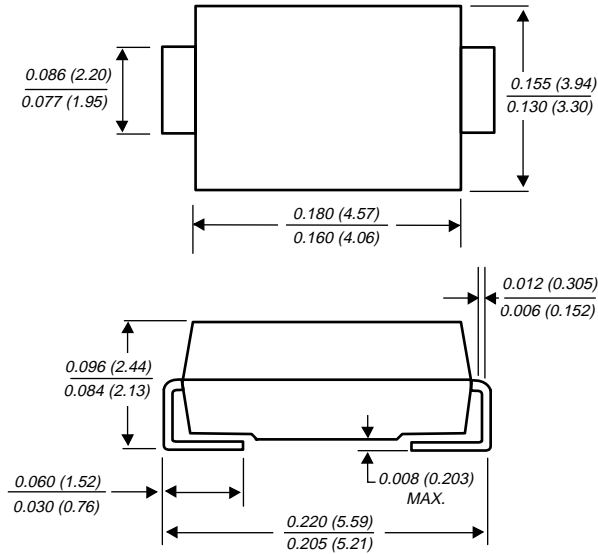

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mount applications
- ◆ Low profile package
- ◆ Built-in strain relief, ideal for automated placement
- ◆ Glass passivated chip junction
- ◆ Fast switching for high efficiency
- ◆ High temperature soldering: 250°C/10 seconds at terminals



### MECHANICAL DATA

**Case:** JEDEC DO-214AA molded plastic over passivated chip

**Terminals:** Solder plated solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode band end

**Weight:** 0.003 ounce, 0.093 gram

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	RS2A	RS2B	RS2D	RS2G	RS2J	RS2K	UNITS
Device marking code		RA	RB	RD	RG	RJ	RK	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	Volts
Maximum average forward rectified current at $T_L=100^\circ\text{C}$	$I_{(AV)}$	1.5						Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50.0						Amps
Maximum instantaneous forward voltage at 1.5A	$V_F$	1.30						Volts
Maximum DC reverse current at rated DC blocking voltage	$I_R$	5.0 200.0						$\mu\text{A}$
Maximum reverse recovery time (NOTE 1)	$t_{rr}$	150			250		500	ns
Typical junction capacitance (NOTE 2)	$C_J$	50.0						pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$ $R_{\theta JL}$	55.0 18.0						$^\circ\text{C/W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to 150						$^\circ\text{C}$

#### NOTES:

- (1) Reverse recovery test conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{rr}=0.25$
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (3) Thermal resistance from junction to ambient and junction to lead  
P.C.B. mounted on 0.27 x 0.27" (7.0 x 7.0mm) copper pad areas

# RATINGS AND CHARACTERISTIC CURVES RS2A THRU RS2K

FIG. 1 - FORWARD CURRENT DERATING CURVE

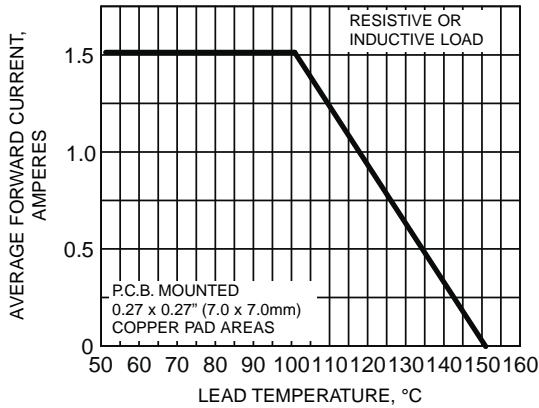


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

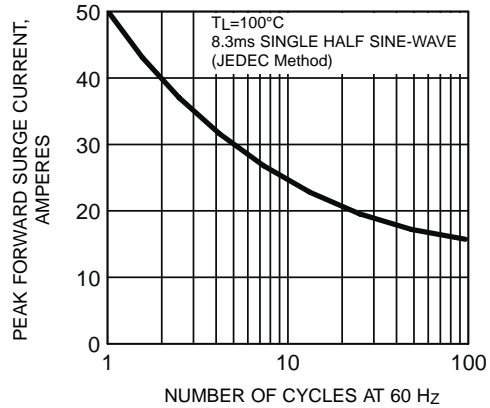


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

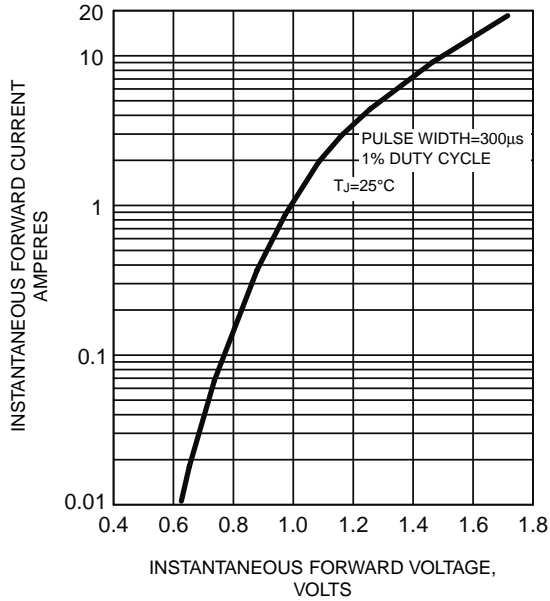


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

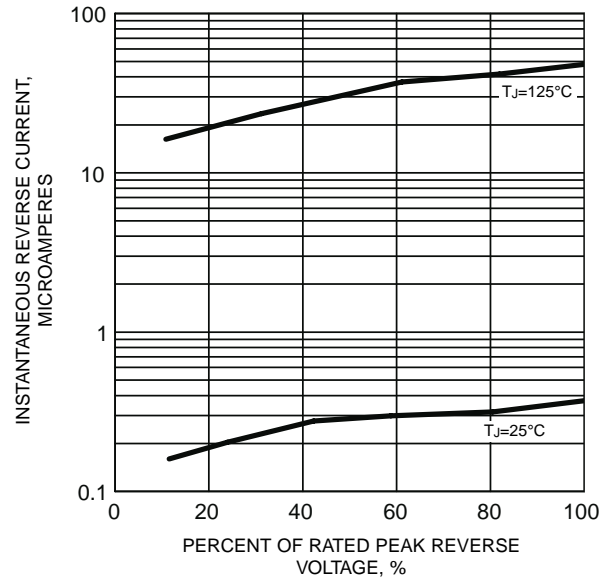


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

