

KSR1104**NPN EPITAXIAL SILICON TRANSISTOR****SWITCHING APPLICATION (Bias Resistor Built In)**


T-35-11

- Switching Circuit, Inverter, Interface circuit
Driver circuit
- Built in bias Resistor ($R_1=47K\Omega$, $R_2=47K\Omega$)
- Complement to KSR2104

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	50	V
Emitter-Base Voltage	V_{EBO}	10	V
Collector Current	I_C	100	mA
Collector Dissipation	P_C	200	mW
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 ~ 150	$^\circ\text{C}$

SOT-23





1. Base 2. Emitter 3. Collector

3

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)


Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C=10\mu\text{A}$, $I_E=0$	50			V
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=100\mu\text{A}$, $I_B=0$	50			V
Collector Cutoff Current	I_{CBO}	$V_{CB}=40\text{V}$, $I_E=0$			0.1	μA
DC Current Gain	h_{FE}	$V_{CE}=5\text{V}$, $I_C=5\text{mA}$	68			
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=10\text{mA}$, $I_B=0.5\text{mA}$			0.3	V
Current Gain-Bandwidth Product	f_T	$V_{CE}=5\text{mA}$, $I_C=10\text{V}$		250		MHz
Output Capacitance	C_{ob}	$V_{CB}=10\text{V}$, $I_E=0$ $f=1.0\text{MHz}$		3.7		pF
Input Off Voltage	$V_{I(off)}$	$V_{CE}=5\text{V}$, $I_C=100\mu\text{A}$	0.5			V
Input On Voltage	$V_{I(on)}$	$V_{CE}=0.3\text{V}$, $I_C=5\text{mA}$			3	V
Input Resistor	R_1		32	47	62	$K\Omega$
Resistor Ratio	R_1/R_2		0.9	1	1.1	

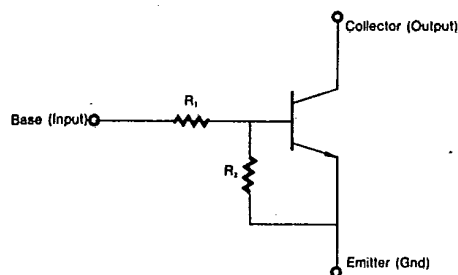Equivalent Circuit**Marking**


KSR1104

NPN EPITAXIAL SILICON TRANSISTOR


INPUT ON VOLTAGE

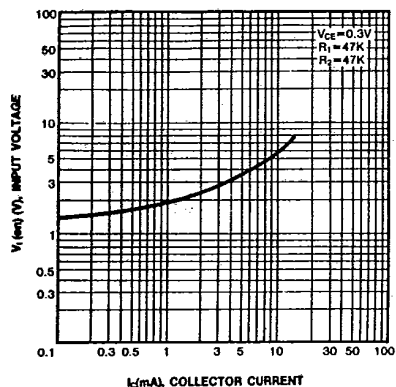

DC CURRENT GAIN

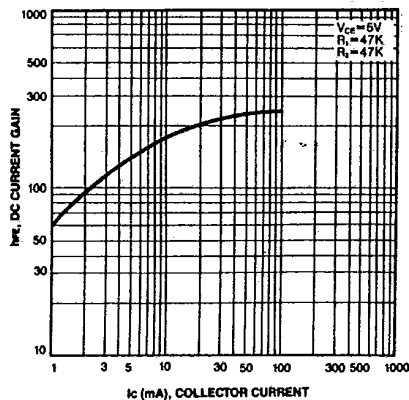

INPUT OFF VOLTAGE

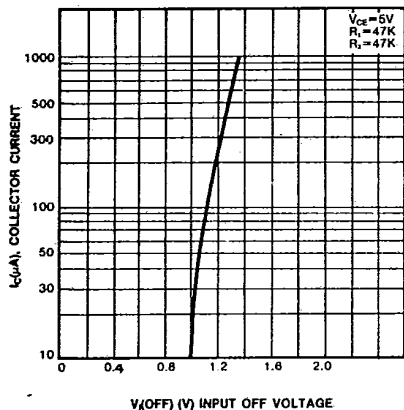

POWER DERATING

