

RoHS Compliant Product

A suffix of "-C" specifies halogen free & RoHS compliant

FEATURES


- Ideal for surface mount applications
- Easy pick and place
- Built-in strain relief
- Low forward voltage drop

SMA



MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Metallurgically bonded construction
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.060 grams



| | Dimensions in Millimeters | | Dimensions in Inches | |
|----------|---------------------------|-------|----------------------|-------|
| A | 1.25 | 1.65 | 0.049 | 0.065 |
| B | 3.99 | 4.60 | 0.157 | 0.181 |
| C | 2.50 | 2.90 | 0.098 | 0.114 |
| D | 1.98 | 2.44 | 0.078 | 0.096 |
| E | 0.051 | 0.203 | 0.002 | 0.008 |
| F | 4.78 | 5.28 | 0.188 | 0.208 |
| G | 0.76 | 1.52 | 0.030 | 0.060 |
| H | 0.152 | 0.305 | 0.006 | 0.012 |

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| TYPE NUMBER | SM220A | SM240A | SM260A | SM2100A | UNITS |
|--|--------------|--------|--------|---------|--------|
| Maximum Recurrent Peak Reverse Voltage | 20 | 40 | 60 | 100 | V |
| Working Peak Reverse Voltage | 20 | 40 | 60 | 100 | V |
| Maximum DC Blocking Voltage | 20 | 40 | 60 | 100 | V |
| Maximum Average Forward Rectified Current, See Fig. 1 | 2.0 | | | | A |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | 50 | | | | A |
| Maximum Instantaneous Forward Voltage at 2.0A | 0.45 | 0.52 | 0.65 | 0.83 | V |
| Maximum DC Reverse Current Ta=25 °C | 0.2 | | | | mA |
| At Rated DC Blocking Voltage Ta=100 °C | 10 | | | | mA |
| Typical Junction Capacitance (Note 1) | 170 | | | | pF |
| Typical Thermal Resistance RθJA (Note 2) | 75 | | | | °C / W |
| Operating Temperature Range T _J | - 50 ~ + 150 | | | | °C |
| Storage Temperature Range T _{STG} | - 60 ~ + 175 | | | | °C |

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient.

● RATING AND CHARACTERISTIC CURVES (SM220A THRU SM2100A)

FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE

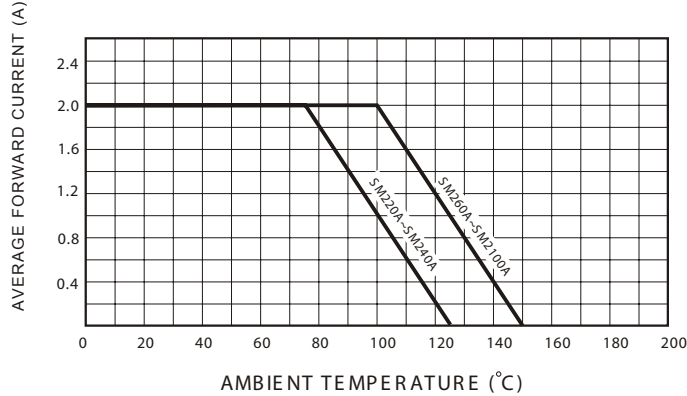


FIG.2 TYPICAL FORWARD CHARACTERISTICS

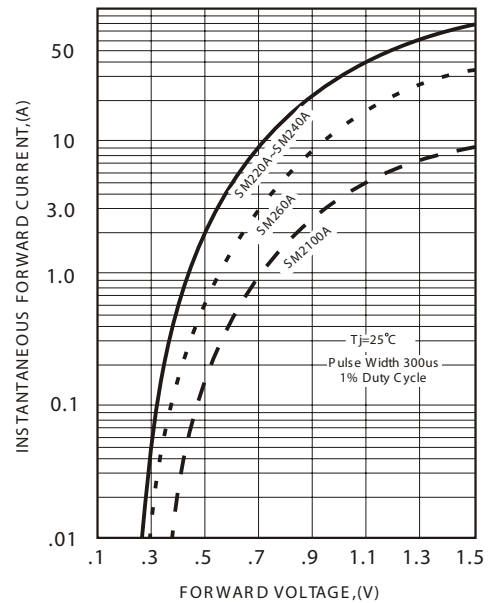


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

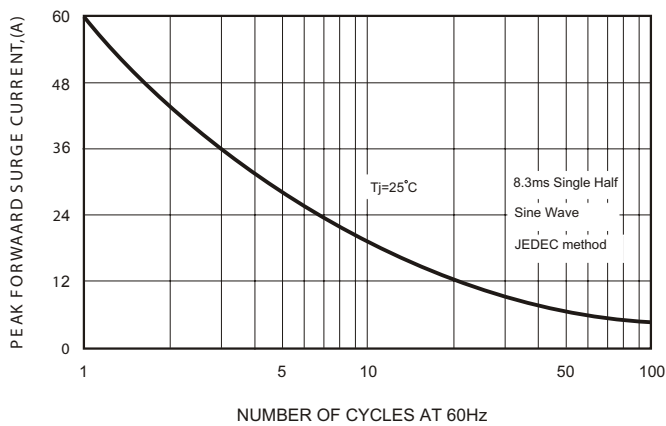


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

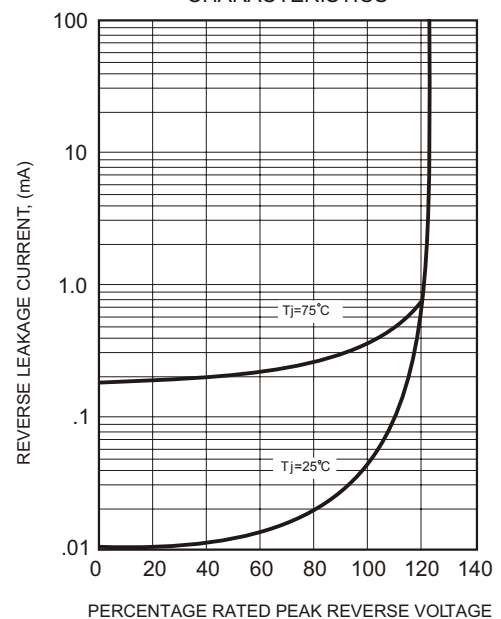


FIG.4-TYPICAL JUNCTION CAPACITANCE

