

STANDARD TVS COMPONENTS**APPLICATIONS**

- ✓ Noise Suppression for Data Lines
- ✓ Laptop Computers
- ✓ Cellular Phones
- ✓ Digital Cameras
- ✓ Personal Digital Assistants (PDAs)

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns

FEATURES

- ✓ 10 Watts Peak Pulse Power per Line (tp = 10/1000µs)
- ✓ ESD Protection > 40 kilovolts
- ✓ Bidirectional Configuration
- ✓ Protects One Data Line
- ✓ Low Clamping Voltage
- ✓ Easy Placement for Manufacturing
- ✓ **LOW CAPACITANCE**
- ✓ RoHS Compliant in Lead-Free Versions

MECHANICAL CHARACTERISTICS

- ✓ DFN-2 Package
- ✓ Weight 0.73 milligrams (Approximate)
- ✓ Available in Tin-Lead or Lead-Free Pure-Tin Plating(Annealed)
- ✓ Solder Reflow Temperature:
 - Tin-Lead - Sn/Pb, 85/15: 240-245°C
 - Pure-Tin - Sn, 100: 260-270°C
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481
- ✓ Device Part Number on Reel & Marking Code on Device

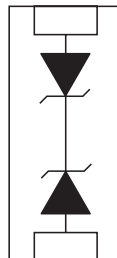PIN CONFIGURATION


DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_p = 10/1000\mu s$) - See Figure 1	P_{Pk}	10	W
Power Dissipation	P	150	mW
Junction Temperature	T_J	150	°C
Storage Temperature	T_{stg}	-55 to 150	°C
Operation Temperature	T_{opr}	-50 to 150	°C


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified					
PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM LEAKAGE CURRENT	TYPICAL CAPACITANCE
		V_{WM} VOLTS	@ 1mA $V_{(BR)}$ VOLTS	@3.5V I_D μA	0V @ 1 MHz C pF
PRSB6.8C	A	4.7	5.7	1.0	15

GRAPHS


**FIGURE 1
PEAK PULSE POWER VS PULSE TIME**

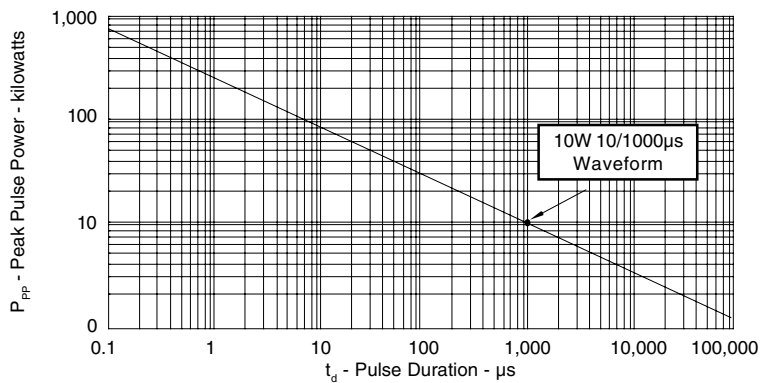

**FIGURE 2
PULSE WAVE FORM**

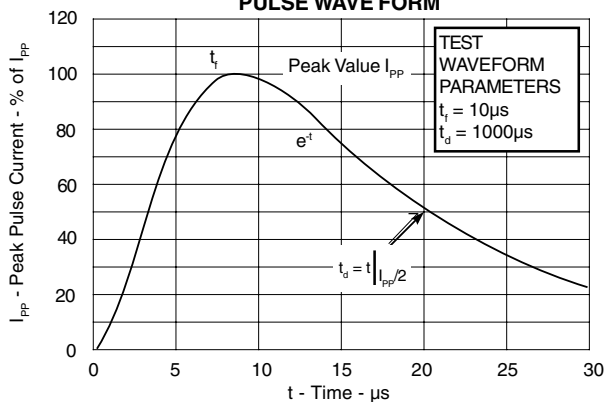

**FIGURE 3
OVERSHOOT & CLAMPING VOLTAGE**


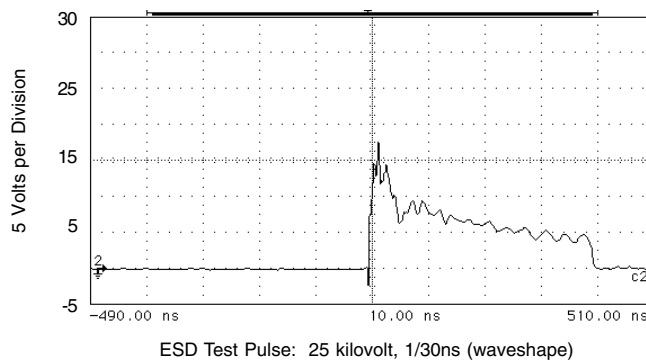


APPLICATION INFORMATION

PRINTED CIRCUIT BOARD RECOMMENDATIONS	
PARAMETER	VALUE
Pad Size on PCB	0.275mm
Pad Shape	Round
Pad Definition	Non-Solder Mask Defined Pads
Solder Mask Opening	0.325mm Round
Solder Stencil Thickness	0.150mm
Solder Stencil Aperture Opening (laser cut, 5% tapered walls)	0.330mm Round
Solder Paste Type	No Clean
Pad Protective Finish	OSP(Entek Cu Plus 106A)
Tolerance - Edge To Corner Ball	±50µm
Solder Ball Side Coplanarity	±20µm
Maximum Dwell Time Above Liquidous (183°C)	60 Seconds
Soldering Maximum Temperature	270°C

REQUIREMENTS
<p>Temperature:</p> <p>T_p for Lead-Free (SnAgCu): 260-265°C</p> <p>T_p for Tin-Lead: 240-245°C</p> <p>Preheat time and temperature depends on solder paste and flux activation temperature, component size, weight, surface area & plating.</p>

RECOMMENDED NON-SOLDER MASK DEFINED PAD ILLUSTRATION

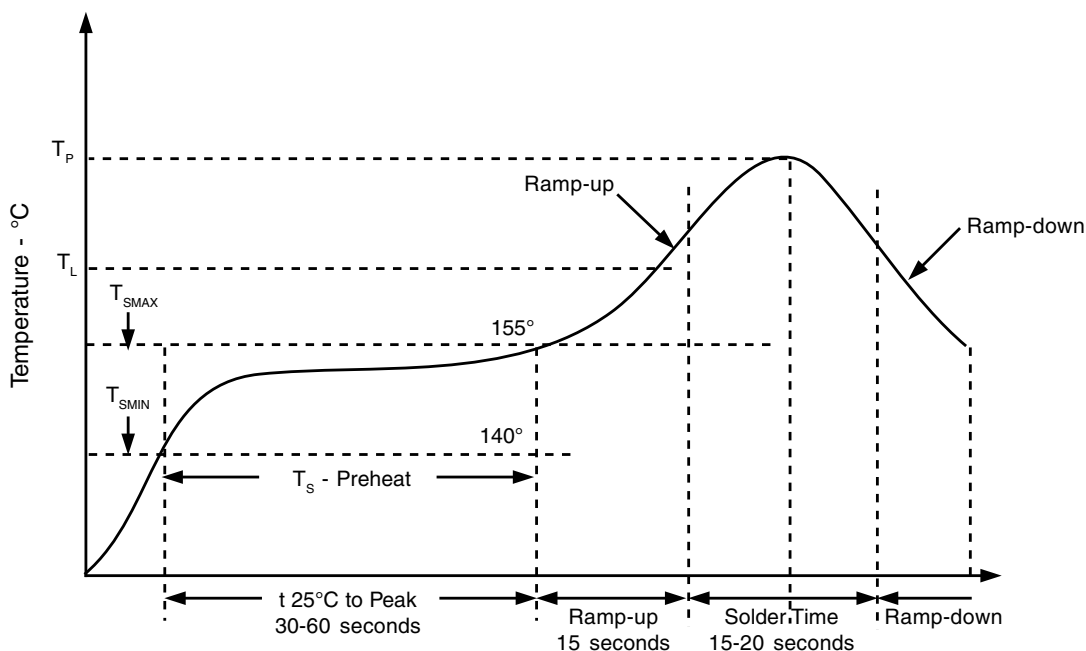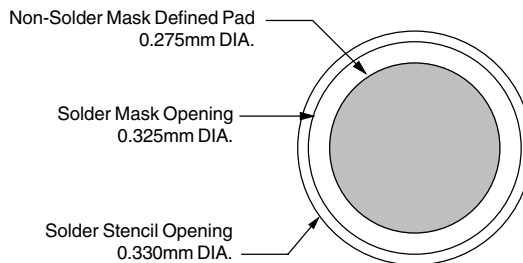

PACKAGE OUTLINE & DIMENSIONS

PACKAGE OUTLINE

PACKAGE DIMENSIONS

DIM	INCHES			MILLIMETERS		
	MIN	NOR	MAX	MIN	NOR	MAX
A	0.023	0.024	0.025	0.58	0.61	0.64
B	0.038	0.040	0.042	0.97	1.02	1.07
C	0.018	0.020	0.022	0.46	0.51	0.56
D	0.010	0.012	0.014	0.25	0.30	0.36
E	0.012	0.014	0.016	0.30	0.36	0.41
F	0.010	0.012	0.014	0.25	0.30	0.36
H	0.011	0.012	0.013	0.28	0.30	0.33

NOTES

- Controlling dimensions in inches.
- Decimal tolerances for mounting pad : ± 0.003" (±0.08mm).
- Maximum size: 0.052" (1.321mm) by 0.036" (0.914mm).

MOUNTING PAD

PAD DIMENSIONS

DIM	MILLIMETERS	INCHES
A	0.762 ± 0.025	0.030 ± 0.001
B	0.356 ± 0.025	0.014 ± 0.001
C	0.381 ± 0.025	0.015 ± 0.001
E	1.473 ± 0.050	0.058 ± 0.002
F	0.559 ± 0.025	0.022 ± 0.001

TAPE & REEL ORDERING NOMENCLATURE

- Surface mount product is taped and reeled in accordance with EIA 481.
- 8mm Plastic Tape: 7 Inch Reels - 5,000 pieces per reel. Ordering Suffix: -T75-1 (i.e., PRSB6.8C-T75-1).
- Suffix - LF = Lead Free Pure-Tin Plating: i.e., PRSB6.8C-LF-T75-1.

TAPE & REEL ORIENTATION


NOTE

- Top view of tape. Solder PADS face down in tape package.

Outline & Dimensions: Rev 0 - 4/05, 06059

Tape & Reel Specifications (Dimensions in millimeters)

Reel Dia.	Tape Width	A0	B0	K0	D	E	F	W	P0	P2	P	tmax
178mm (7")/330mm(13")	8mm	0.80±0.10	1.20±0.10	0.70 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ±0.30	4.00 ±0.10	2.00 ±0.05	2.00 ±0.10	0.25

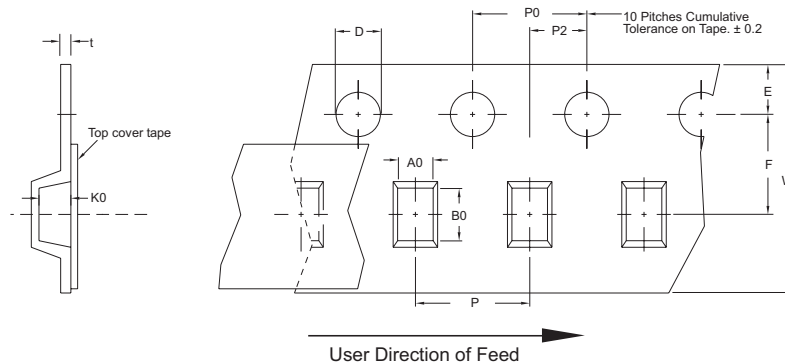

COPYRIGHT © ProTek Devices 2005

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices
 2929 South Fair Lane, Tempe, AZ 85282
 Tel: 602-431-8101 Fax: 602-431-2288
 E-Mail: sales@protekdevices.com
 Web Site: www.protekdevices.com