

SANYO

No.2823

DSE015

Silicon Epitaxial Type

High-Speed Switching Diode

Features

- Very small-sized package permitting DSE015-applied sets to be made small and slim
- Fast switching speed

Absolute Maximum Ratings at Ta = 25°C


			unit
Peak Reverse Voltage	V_{RM}	-75	V
Reverse Voltage	V_R	-50	V
Surge Current	I_{FSM} 1 μ sec	4	A
Average Rectified Current	I_O	150	mA
Peak Forward Current	I_{FM}	300	mA
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55 to +150	°C

Electrical Characteristics at Ta = 25°C

			min	typ	max	unit
Forward Voltage	V_F	$I_F = 10\text{mA}$		0.72	1.0	V
		$I_F = 50\text{mA}$		0.82	1.0	V
		$I_F = 100\text{mA}$		0.88	1.2	V
Reverse Current	I_R	$V_R = -50\text{V}$			-100	nA
Interterminal Capacitance	C	$V_R = 0, f = 1\text{MHz}$	4.5	9		pF
Reverse Recovery Time	t_{rr}	$I_F = 10\text{mA}, V_R = -6\text{V}, R_L = 50\Omega, I_{rr} = 0.1I_{rp}$			8	ns
Rated I/O Frequency					12.5	MHz


Marking : A1

Reverse Recovery Time Test Circuit

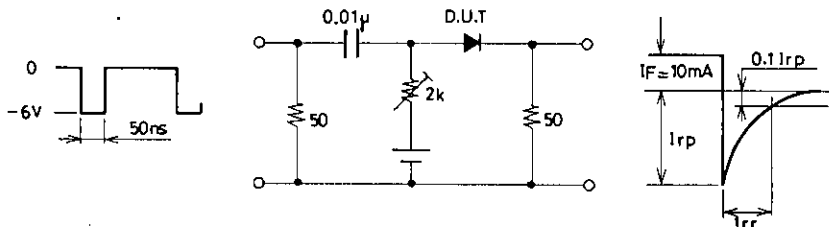




Unit (resistance: Ω , capacitance: F)

Package Dimensions 1195
(unit: mm)

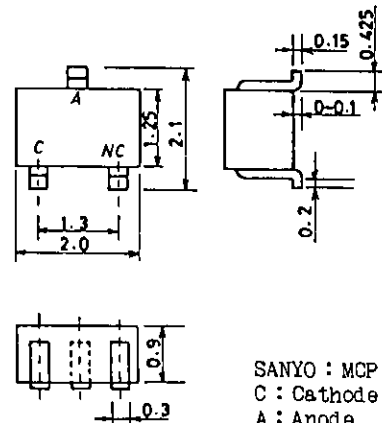

SANYO : MCP
C : Cathode
A : Anode

DSE015

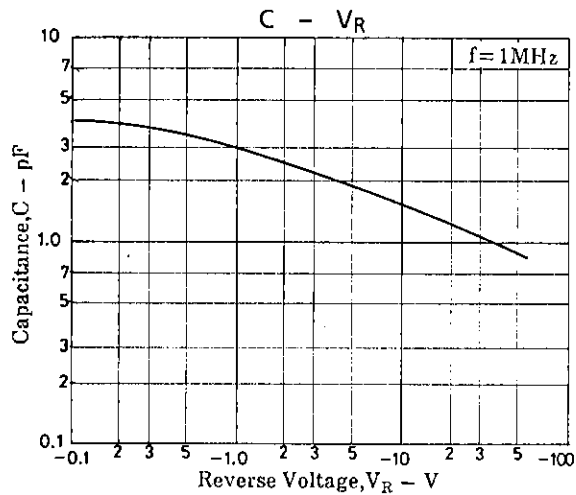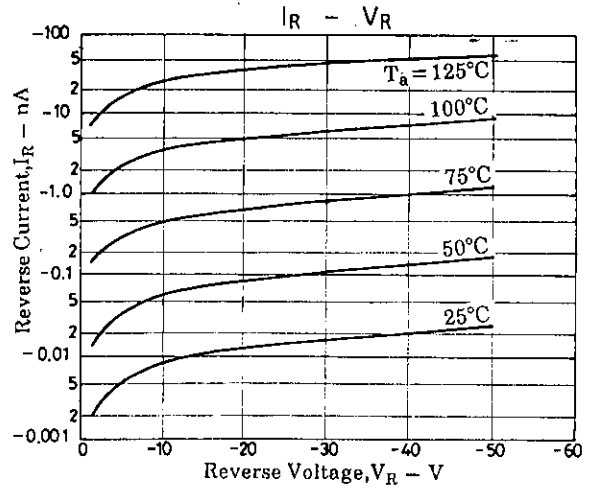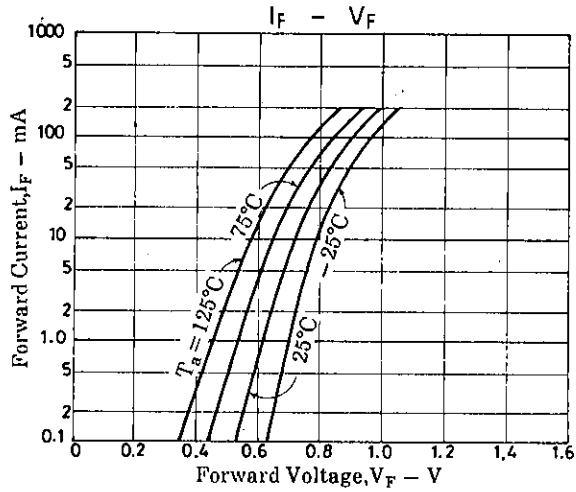

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.