

SURFACE MOUNT UNIDIRECTIONAL TRANSIENT VOLTAGE SUPPRESSORS

STAND-OFF VOLTAGE - **5.0** to **51** Volts
POWER DISSIPATION - **200** WATTS


FEATURES

- For surface mounted applications
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has UL flammability classification 94V-0
- Typical IR less than 1uA above 10V
- Fast response time: typically less than 1.0ns
- IEC 61000-4-2, level 4 (ESD), >15KV(air); > 8KV(contact)

MECHANICAL DATA

- Case Material: "Green" molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl.)
- Terminals: Lead Free Plating (Matte Tin Finish)
- Component in accordance to RoHs 2002/95/EC
- Polarity : Cathode designated by TAB1
- Weight : 10 mg

Mite Flat

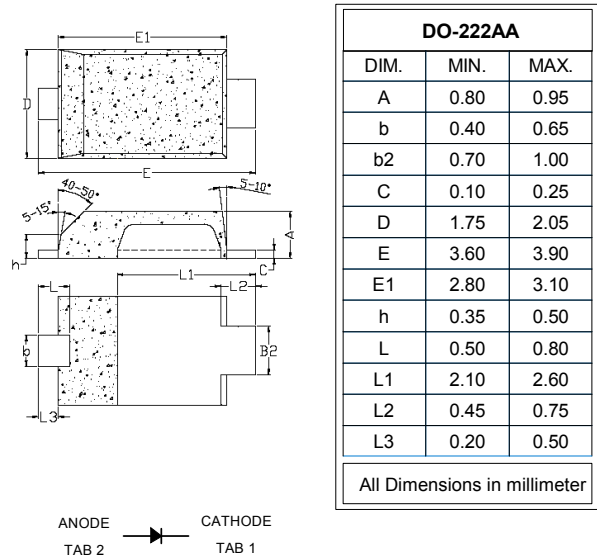

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

CHARACTERISTICS	SYMBOLS	VALUE	UNIT
PEAK POWER DISSIPATION AT T _J = 25 °C , T _P = 1ms (Note 1)	P _{PK}	Minimum 200	WATTS
Non repetitive Peak Forward Surge Current 8.3ms single half sine-wave @ T _J = 25 °C	I _{FSM}	25	AMPS.
Operating Temperature Range	T _J	-55 to +175	°C
Storage Temperature Range	T _{STG}	-55 to +175	°C

NOTES : 1. Non-repetitive current pulse, per Fig. 3 and derated above T_J= 25 °C per Fig.2.

REV. 10, Nov-2013, KSIP01

FIG.1 - PEAK PULSE POWER DERATING CURVE

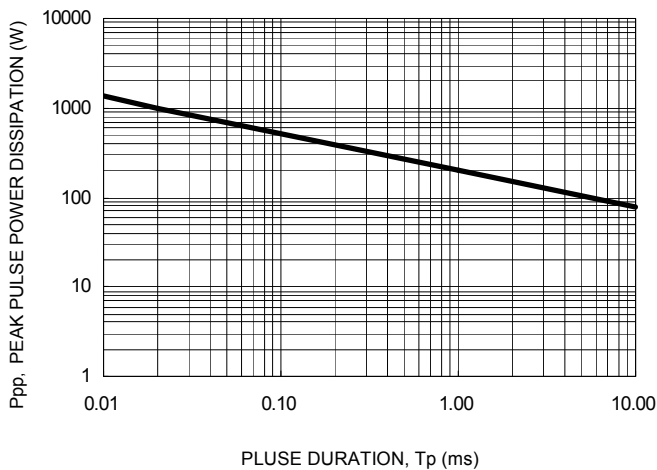


FIG.2 - PEAK PULSE POWER DERATING CURVE

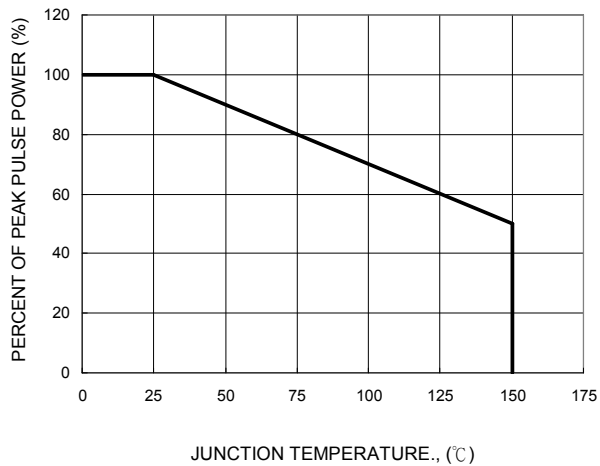


FIG.3 - PULSE WAVEFORM


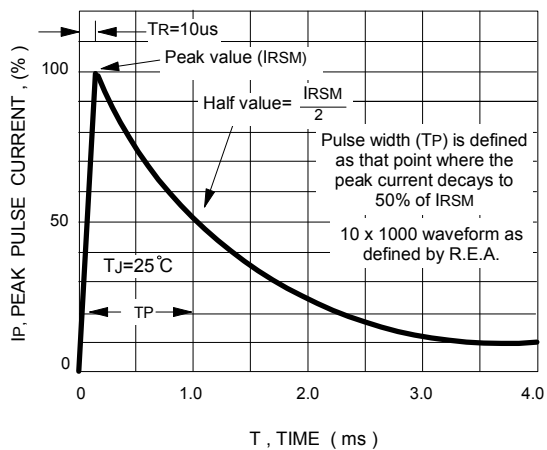


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

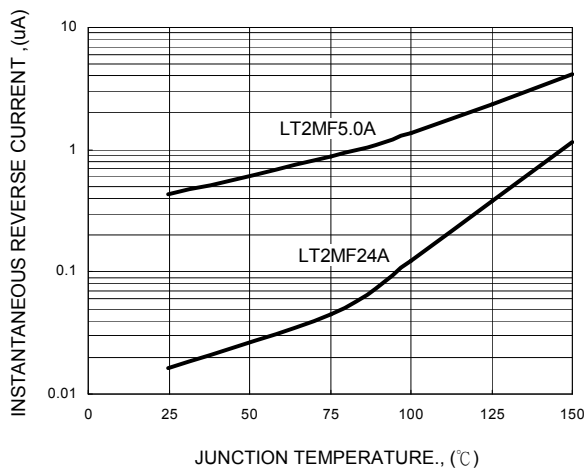

Device Uni-directional	Marking	Working Peak Reverse Voltage	Breakdown voltage			Maximum Reverse Leakage at V _{RWM}	Maximum Reverse Surge Current	Maximum Reverse Voltage at I _{RSM} (Clamping Voltage)
			V _{RWM} (V)	Min.(V)	Max.(V)			
LT2MF5.0A	MFB	5.0	6.40	7.07	10	50	21.7	9.2
LT2MF6.0A	MFC	6.0	6.67	7.37	10	50	19.4	10.3
LT2MF8.5A	MFD	8.5	9.44	10.43	1	10	13.9	14.4
LT2MF10A	MFE	10	11.10	12.3	1	5.0	11.8	17.0
LT2MF12A	MFF	12	13.3	14.7	1	1.0	10.1	19.9
LT2MF13A	MFG	13	14.4	15.9	1	1.0	9.3	21.5
LT2MF15A	MFP	15	16.7	18.5	1	1.0	8.2	24.4
LT2MF16A	MFH	16	17.1	18.9	1	1.0	7.7	26.0
LT2MF18A	MFI	18	20.0	22.1	1	1.0	6.9	29.2
LT2MF20A	MFJ	20	22.2	24.5	1	1.0	6.2	32.4
LT2MF22A	MFQ	22	24.4	27.0	1	1.0	5.6	35.5
LT2MF24A	MFK	24	25.7	28.4	1	1.0	5.1	38.9
LT2MF26A	MFL	26	28.9	31.9	1	1.0	4.8	42.1
LT2MF28A	MFM	28	31.1	34.4	1	1.0	4.4	45.4
LT2MF30A	MFN	30	33.3	36.8	1	1.0	4.1	48.4
LT2MF36A	MFO	36	40.0	44.2	1	1.0	3.4	58.1
LT2MF40A	MFR	40	44.4	49.1	1	1.0	3.1	64.5
LT2MF43A	MFS	43	47.8	52.8	1	1.0	2.88	69.4
LT2MF45A	MFT	45	50.0	55.3	1	1.0	2.75	72.7
LT2MF48A	MFU	48	53.3	58.9	1	1.0	2.58	77.4
LT2MF51A	MFV	51	56.7	62.7	1	1.0	2.43	82.4

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.