



PJGL05 SERIES

ULTRA LOW CAPACITANCE SINGLE TVS FOR HIGH SPEED DATA LINES

This Transient Voltage Suppressor is intended to Protect Sensitive Equipment against Electrostatic Discharge and Transient Events as well to offer a Minimum insertion loss in high speed data communication transmission line ports used in Portable Consumer, Computing and Networking Applications.

VOLTAGE 5~24 Volts **POWER** 400Watts


SOT-23 Unit : inch(mm)

FEATURES

- Working Peak Reverse Voltage Range-5,12,15 and 24V
- Maximum Leakage Current of 5μA
- IEC61000-4-2 Compliance 15kV Air,8kV Contact Discharge
- IEC61000-4-5 17 Amps peak, 8x20μsec Waveform
- Lead free in comply with EU RoHS 2011/65/EU directives
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case: SOT-23, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0003 ounces, 0.008 grams

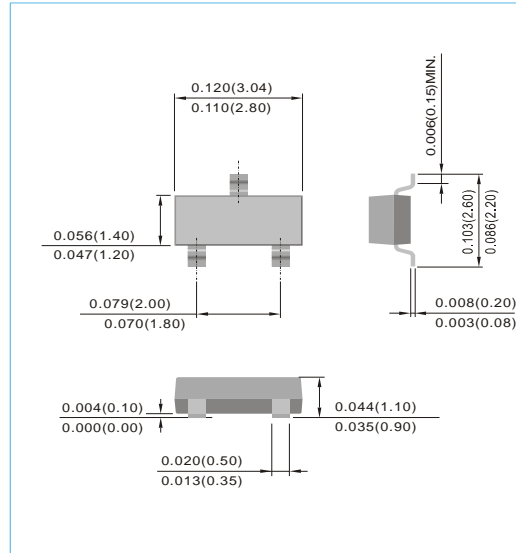

APPLICATIONS

- Mobile Phones and accessories
- Universal Serial Bus (USB1.1 and 2.0) Applications
- Portable Consumer Electronics
- Instrumentation Equipment
- Ethernet 10,100 and 1000 Base Port Protection

MAXIMUM RATINGS

Rating	Symbol	Value	Units
Peak Pulse Power (8x20 μs Waveform)	P _{PP}	400	W
Peak Pulse Current (8x20 μs Waveform)	I _{PP}	17	A
ESD Voltage (HBM)	V _{ESD}	>25	kV
Lead Soldering Temperature (max 10 secs)	T _L	260	°C
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C




Fig.59



PJGL05 SERIES

ELECTRICAL CHARACTERISTICS (T_J=25°C)





PJGL05 Marking GL5						
Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	V _{WRM}		-	-	5	V
Reverse Breakdown Voltage	V _{BR}	I _{BR} =1mA	6	-	-	V
Reverse Leakage Current	I _R	V _R =5V	-	-	20	μA
Clamping Voltage (8/20μs)	V _{CL}	I _{PP} =1Amps	-	-	9.5	V
Clamping Voltage (8/20μs)	V _{CL}	I _{PP} =5Amps	-	-	11	V
Off State Junction Capacitance	C _J	0Vdc Bias f = 1MHz Between pins 1 and 2	-	-	1.2	pF
PJGL12 Marking G12						
Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	V _{WRM}		-	-	12	V
Reverse Breakdown Voltage	V _{BR}	I _{BR} =1mA	13.3	-	-	V
Reverse Leakage Current	I _R	V _R =12V	-	-	1	μA
Clamping Voltage (8/20μs)	V _{CL}	I _{PP} =1Amps	-	-	19	V
Clamping Voltage (8/20μs)	V _{CL}	I _{PP} =5Amps	-	-	24	V
Off State Junction Capacitance	C _J	0Vdc Bias f = 1MHz Between pins 1 and 2	-	-	1.2	pF
PJGL15 Marking G15						
Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	V _{WRM}		-	-	15	V
Reverse Breakdown Voltage	V _{BR}	I _{BR} =1mA	16.7	-	-	V
Reverse Leakage Current	I _R	V _R =15V	-	-	1	μA
Clamping Voltage (8/20μs)	V _{CL}	I _{PP} =1Amps	-	-	24	V
Clamping Voltage (8/20μs)	V _{CL}	I _{PP} =5Amps	-	-	30	V
Off State Junction Capacitance	C _J	0Vdc Bias f = 1MHz Between pins 1 and 2	-	-	1.2	pF



PJGL05 SERIES

PJGL24 Marking G24						
Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	V_{WRM}		-	-	24	V
Reverse Breakdown Voltage	V_{BR}	$I_{BR}=1mA$	26.7	-	-	V
Reverse Leakage Current	I_R	$V_R=24V$	-	-	1	μA
Clamping Voltage (8/20 μs)	V_{CL}	$I_{PP}=1Amps$	-	-	43	V
Clamping Voltage (8/20 μs)	V_{CL}	$I_{PP}=5Amps$	-	-	55	V
Off State Junction Capacitance	C_J	0Vdc Bias f = 1MHz Between pins 1 and 2	-	-	1.2	pF

TYPICAL CHARACTERISTIC CURVES

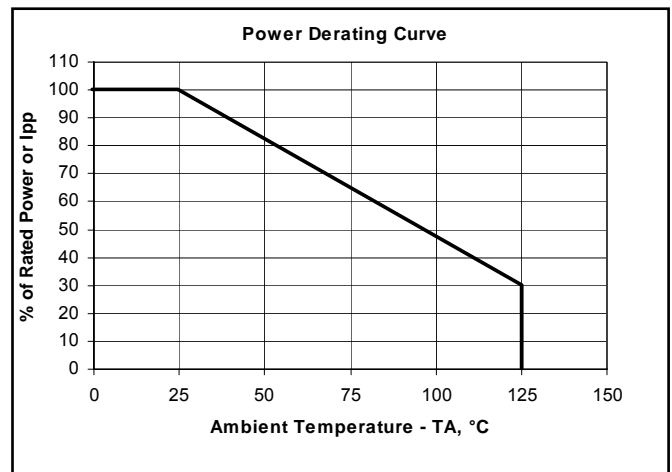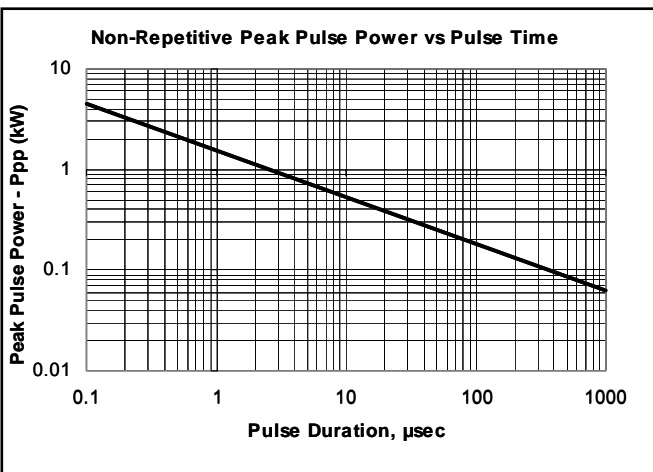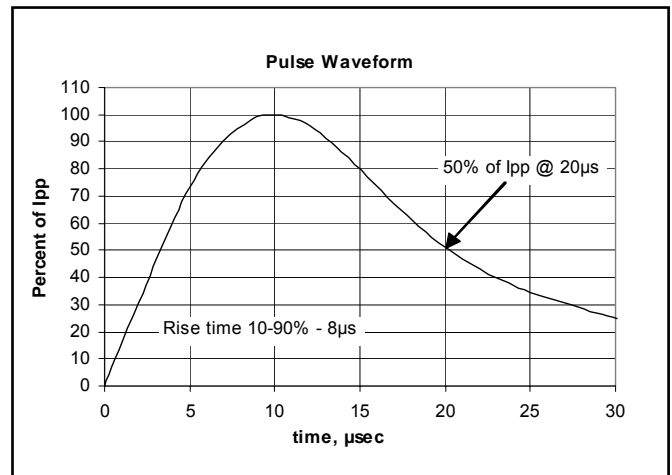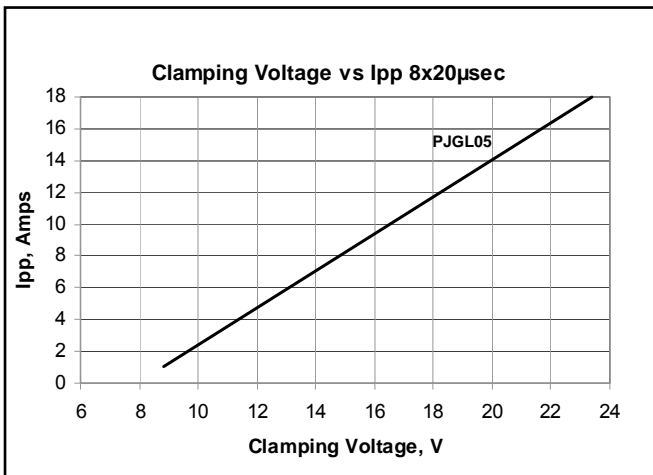




PJGL05 SERIES

MOUNTING PAD LAYOUT

SOT-23

Unit : inch(mm)

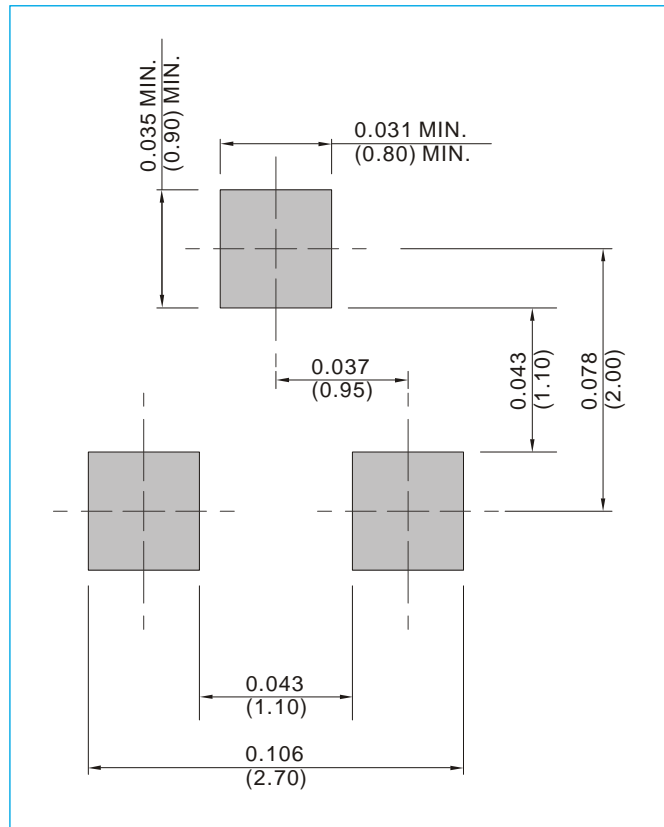

ORDER INFORMATION

- Packing information
T/R - 12K per 13" plastic Reel
T/R - 3K per 7" plastic Reel



PJGL05 SERIES

Part No_packing code_Version

PJGL05_R1_00001

PJGL05_R2_00001

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



PJGL05 SERIES

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.