


## Equivalent Circuit

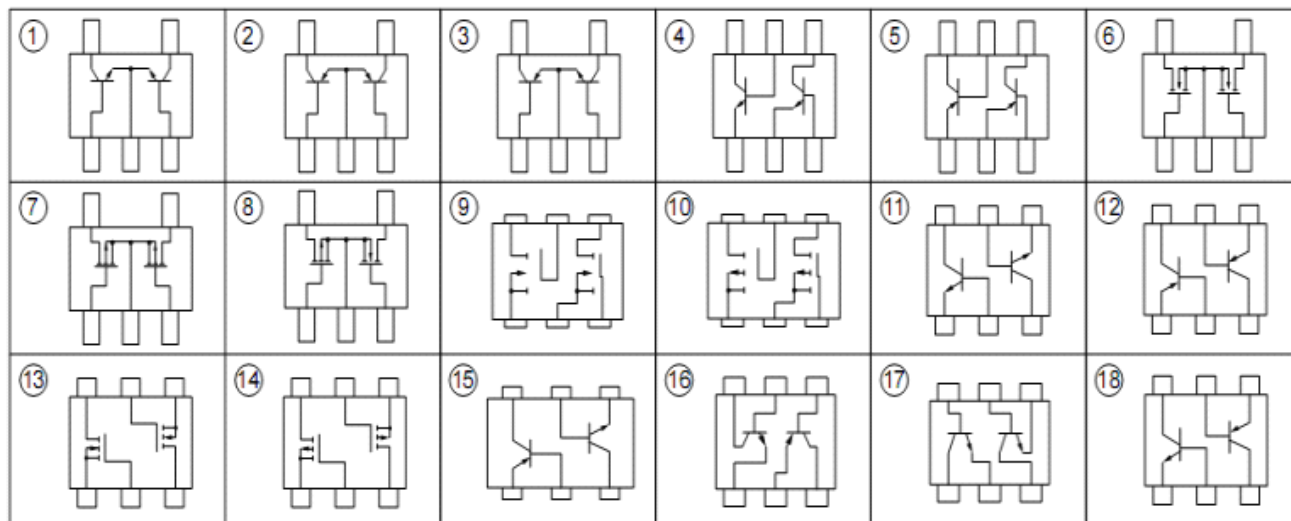

## ■ Bipolar Transistor

Part number	Equivalent circuit	V <sub>CEO</sub> (V)	I <sub>QDC</sub> (mA)	P <sub>T</sub> * (mW)	h <sub>FE</sub>	V <sub>CE</sub> (V)		I <sub>c</sub> (mA)	Package
						V <sub>CE</sub> (V)	I <sub>c</sub> (mA)		
μPA570T	①	50	100	200	90 to 600	6	1	• 5-pin Super Mini-Mold SC-88A	
μPA571T	②	-50	-100	200		-6	-1		
μPA574T	③	50/-50	100/-100	300		6/-6	1/-1		
μPA670T	⑪	50	100	200		6	1	• 6-pin Super Mini-Mold SC-88	
μPA671T	⑫	-50	-100	200		-6	-1		
μPA500T	①	50	100	300		6	1	• 5-pin Mini-Mold SC-74A	
μPA501T	②	-50	-100	300		-6	-1		
μPA504T	③	50/-50	100/-100	300		6/-6	1/-1		
μPA600T	④	50	100	300		6	1	• 6-pin Mini-Mold SC-74	
μPA601T	⑤	-50	-100	300		-6	-1		
μPA604T	⑪	50	100	300		6	1		
μPA605T	⑫	-50	-100	300		-6	-1		
μPA608T	⑮	50	100	300		90 to 600	6		1
		-16	-500			110 to 400	-1		-100
μPA609T	⑯	40	500	300		75 to 300	1	150	
		-40	-500			75 to 300	-1	-150	
μPA673T	⑰	15	200	200		82 to 180	6	1	• 6-pin Super Mini-Mold SC-88
μPA674T	⑱	15	200	200		40 to 200	1	10	
		-15	-50		50 to 150	-1	-10		

\*: Total